

# Oracle Banking Digital Experience

Installation Guide  
Release 19.2.0.0.0

Part No. F25153-01

December 2019

**ORACLE®**

Installation Guide

December 2019

Oracle Financial Services Software Limited

Oracle Park

Off Western Express Highway

Goregaon (East)

Mumbai, Maharashtra 400 063

India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax: +91 22 6718 3001

[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2019, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

# Table of Contents

1.	Preface.....	4
2.	Introduction.....	6
3.	Prerequisites.....	7
4.	Installation.....	11
5.	Installation using Silent Mode.....	24
6.	Installer Verification .....	29
7.	Installer Scope .....	30
8.	Post Installation Steps .....	35
9.	OBDX Product Verification.....	73
10.	Configuration for OUD/OAM .....	76
11.	Multi Entity .....	89
12.	Multi-entity installation using Silent Mode.....	97
13.	OBDX Product Security .....	102
14.	OBDX Product – Best Practice .....	103
15.	JPA and OBDX multi-cluster.....	104
16.	Troubleshoot Overview .....	105

# 1. Preface

## 1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

## 1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## 1.3 Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## 1.4 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters cover following:

- Introduction
- Prerequisites
- Installation
- Post Installation Steps
- Product Verification
- Multi-Entity Installation and configuration
- Best Practice
- Troubleshoot Overview

## 1.5 Related Information Sources

For more information on Oracle Banking Digital Experience Release 19.2.0.0.0, refer to the following documents:

- Oracle Banking Digital Experience Licensing Guide
- Oracle Banking Digital Experience Installer Pre-Requisite Setup Manual
- Oracle Banking Digital Experience Origination Social Media Integration
- Oracle Banking Digital Experience OHS User Interface Configuration
- Oracle Banking Digital Experience Chatbot Configuration
- Oracle Banking Digital Experience Mobile Application Builder-Android

- Oracle Banking Digital Experience Mobile Application Builder-iOS
- Oracle Banking Digital Experience Security Guide
- Oracle Banking Digital Experience System Configuration
- User Manual Oracle Banking Digital Experience Core
- Oracle Banking Digital Experience File Upload Report Configuration

## 2. Introduction

### 2.1 Purpose of the Document

The purpose of the OBDX Installation Manual is to provide a step by step overview on the installation process of the solution.

It includes:

- Reference to prerequisites software installation required for OBDX & OBDX installer
- Setup of OBDX with Oracle's own Core Banking and Origination Products along with Third-party HOST system.
- Running the installation in silent mode
- Advanced Configurations (Post installation)
- Installation Verification
- Multi-Entity Installation and configuration
- Best Practice
- Troubleshoot Overview

[Home](#)

### 3. Prerequisites

OBDX pre-requisite software should be installed and available before proceeding.

For OBDX pre-requisite software setup refers document “Oracle Banking Digital Experience Installer Pre-Requisite Setup Manual” mentioned in section 1.5 Related Information Sources.

#### Installer Pre-requisite verification

Post installation of OBDX Installer prerequisite software’s, verification can be done using below steps.

**Note:** Verification should be performed on Server where Oracle Weblogic is locally installed and by OS user (which is owner for Oracle Weblogic home directory) for non-root steps. The same user will be used to execute installer.

#### Oracle Instant client

Step 1: Login using root user.

Step 2: Run below command to verify if Oracle Instant client is installed.

```
rpm -qa | grep oracle
```

```
[root@ /]# rpm -qa |grep oracle
oraclelinux-developer-release-el7-1.0-4.el7.x86_64
oraclelinux-release-7.5-1.0.3.el7.x86_64
oracle-logos-70.0.3-4.0.7.el7.noarch
oraclelinux-release-el7-1.0-8.el7.x86_64
oracle-softwarecollection-release-el7-1.0-2.el7.x86_64
oracle-instantclient18.3-basic-18.3.0.0.0-2.x86_64
```

**Note:** Above package verification command is specific to Oracle Linux and RHEL distributions only. For other Linux distributions or OS please refer to OS specific package manager documentation.

#### Python 2.7:

Step 1: Execute python -V command

```
python -V
```

```
[devops@ /]$ python -V
Python 2.7.5
```

**Note:** Ensure Python 2.7.5 supported version is installed. Above command should reflect the same.

#### cx Oracle & Urwid:

Step 1: Execute python command

```
python
```

---

**Note:** Ensure Python 2.7.5 version should be available in PATH variable. Above execution should be done using Python 2.7.5.

---

Step 2: Import Urwid and check version

```
import urwid (Press Enter)
urwid.__version__
```

```
[ urwid-1.3.1]# python
Python 2.7.5 (default, May  8 2014, 17:35:19)
[GCC 4.8.2 20140120 (Red Hat 4.8.2-16)] on linux2
Type "help", "copyright", "credits" or "license" for more information.
>>> import urwid
>>> urwid.__version__
'1.3.1'
```

If version is displayed, then Urwid is installed and available for use.

---

**Note:** Ensure Urwid 1.3.1 supported version is installed. Above command should reflect the same.

---

Step 3: Similarly import cx\_Oracle and check version

```
import cx_Oracle (Press Enter)
cx_Oracle.version
```

```
[devops@ /]$ python
Python 2.7.5 (default, Apr 11 2018, 17:41:36)
[GCC 4.8.5 20150623 (Red Hat 4.8.5-28.0.1)] on linux2
Type "help", "copyright", "credits" or "license" for more information.
>>> import cx_Oracle
>>> cx_Oracle.version
'7.3.0'
```

If version is displayed, then cx\_Oracle is installed and available for use.

---

**Note:** Ensure cx\_Oracle 7.3.0 supported version is installed. Above command should reflect the same.

---

### **Python 3.8: --**

Step 1: Execute below commands to install the dependencies

```
yum -y groupinstall development
yum -y install zlib-devel
yum install openssl-devel -y
yum install zlib-devel bzip2-devel openssl-devel ncurses-devel sqlite-devel
yum install zlib-devel bzip2-devel openssl-devel ncurses-devel sqlite-devel -y
yum install python38-pip -y
```



```

yum install libreadline-gplv2-dev libncursesw5-dev libssl-dev libsqlite3-dev tk-dev      libgdbm-
dev libc6-dev libbz2-dev -y
yum install -y libffi-devel
yum install python36u-devel -y
yum install python38u-devel -y
yum install yum-utils -y
yum install epel-release -y
yum install python3.8-pip -y
yum install python3-pip -y

```

---

**Note:** In case wget is not installed , perform following step to install wget

---

```

yum install wget
#Download the python.tar.xz of the required version
wget https://www.python.org/ftp/python/3.8.0/Python-3.8.0.tar.xz
#Untar the Python tar file
tar xJf Python-3.8.0.tar.xz
#Navigate to the Python-<version> directory and run the below commands
cd Python-3.8.0
./configure
make
make install

```

Step 2: To install the Python3 compatible libraries to Python2.7 , configuration of pip needs to be done

```

cd /root
mkdir .pip
vi ~/.pip/pip.conf
[global]
trusted-host = pypi.python.org
                pypi.org
                files.pythonhosted.org

```

Step3: Give permission to pip.conf file and a soft link needs to be created.

---

**Note:** pip version 20.1.1

---

```

ln -s ~/.pip/pip.conf /etc/pip.conf
ls -lrt ~/.pip/pip.conf
chmod 777 /root/.pip/pip.conf
ls -lrt ~/.pip/pip.conf
pip3 list
pip3 install --upgrade pip

```

Step4: Once above steps are executed successfully install the following required modules.

```
pip3 install cx-Oracle==7.3.0
```

```
pip3 install urwid==2.1.0
```

[Home](#)


## 4. Installation

### Pre-Installation

- Install all the prerequisite software and packages mentioned above

### Steps of Installation

- Download and extract the installer zip file (Base).
- Navigate to “<OBDX INSTALLER DIR>/core/config”
- Open the “installer.properties” file to maintain key configurations for BASE ENTITY (OBDX\_BU)

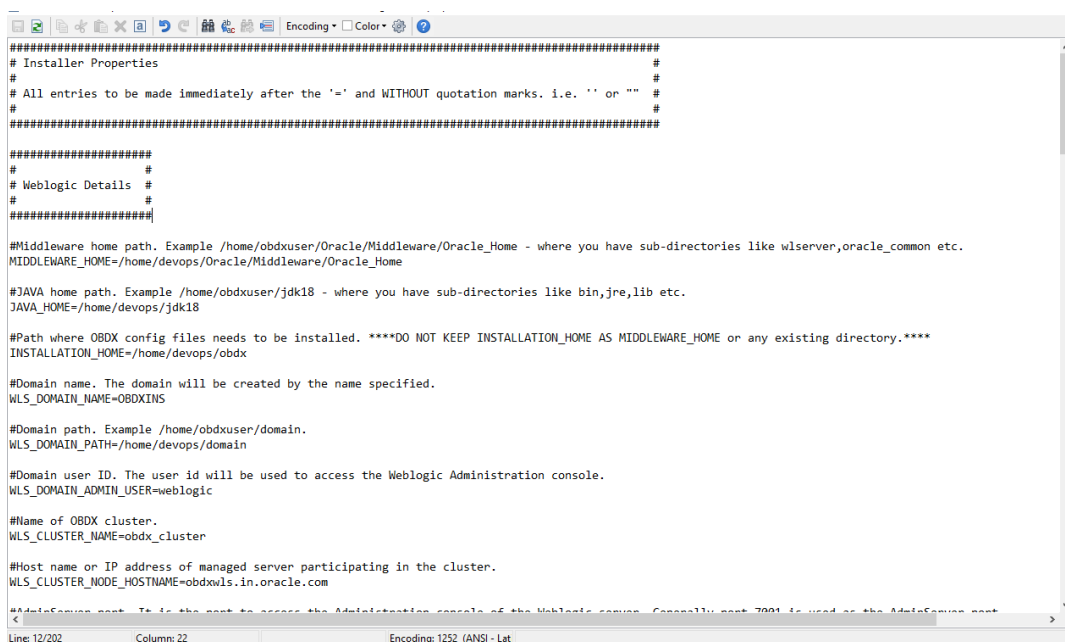

```
#####
# Installer Properties #
# #
# All entries to be made immediately after the '=' and WITHOUT quotation marks. i.e. '' or "" #
# #
#####

#####
# Weblogic Details #
# #
#####

#Middleware home path. Example /home/obdxuser/Oracle/Middleware/Oracle_Home - where you have sub-directories like wlsuser,oracle_common etc.
MIDDLEWARE_HOME=/home/devops/Oracle/Middleware/Oracle_Home

#JAVA home path. Example /home/obdxuser/jdk18 - where you have sub-directories like bin,jre,lib etc.
JAVA_HOME=/home/devops/jdk18

#Path where OBDX config files needs to be installed. ****DO NOT KEEP INSTALLATION_HOME AS MIDDLEWARE_HOME or any existing directory.****
INSTALLATION_HOME=/home/devops/obdx

#Domain name. The domain will be created by the name specified.
WLS_DOMAIN_NAME=OBDXINS

#Domain path. Example /home/obdxuser/domain.
WLS_DOMAIN_PATH=/home/devops/domain

#Domain user ID. The user id will be used to access the Weblogic Administration console.
WLS_DOMAIN_ADMIN_USER=weblogic

#Name of OBDX cluster.
WLS_CLUSTER_NAME=obdx_cluster

#Host name or IP address of managed server participating in the cluster.
WLS_CLUSTER_NODE_HOSTNAME=obdxwls.in.oracle.com

#AdminServer port. It is the port to access the Administration console of the Weblogic server. Generally port 7001 is used as the AdminServer port
<
>
Line: 12/202      Column: 22      Encoding: 1252 (ANSI - Lat
```

### IMPORTANT:

- Enter the values right after the “=” sign
- DO NOT change anything to the left of the “=”
- DO NOT change any of the flag values or pre-filled values (such as **WLS\_JDBC\_DIGX\_NAME**, **WLS\_JDBC\_DIGX\_JNDI**, Flag values etc) available in “**Factory Shipped**” section.
- Ensure there is no blank space after “=” sign, except specific flavor specific configuration

Only below parameters should be set in installer.properties file.

Component	Parameter	Description	Example
DB details (for Weblogic RCU and OBDX schema)	OBDX_DATABASE_HOSTNAME	Enter the hostname of the database server which would host the database schema for OBDX and Weblogic RCU	ofss310759
	OBDX_DATABASE_PORT	Enter the port number of the database listener	1521
	OBDX_DATABASE_SID	Enter the Oracle <b>Service Name</b> for database instance	obxdb.in.oracle.com
	OBDX_DATABASE_SYS_USER	Enter the username with 'sys' privileges	Sys
	POST_FIX	For OBDX schema name like "OBDX_DEV" POST FIX is 'DEV'. <b>SHOULD BE IN UPPERCASE ONLY.</b>	DEV
	OBDX_DBA_DIRECTORY_NAME	Enter the directory name in which you want the OBDX schema tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OBDX_DIR
	OBDX_AUDIT_DBA_DIRECTORY_NAME	Enter the directory name in which you want the OBDX AUDIT tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OBDX_AUDIT_DIR

Component	Parameter	Description	Example
-----------	-----------	-------------	---------

EHMS DB details (to be configured only in-case of FLAVOR as UBS,FCORE &OBPM)	<b>EHMS_DATABASE_HOSTNAME</b>	Enter the hostname for EHMS database server	ofss310759
	<b>EHMS_DATABASE_PORT</b>	Enter the port number of EHMS database listener	1521
	<b>EHMS_SCHEMA_NAME</b>	Enter the Complete OBDX-EXT (B1A1) HostInterfaceschema name you want installer to create as new schema. <b>SHOULD BE IN UPPERCASE ONLY.</b>	EHMS182SCHEMA
	<b>EHMS_DBA_DIRECTORY_NAME</b>	Enter the directory name in which you want the OBDX-EXT (B1A1) schema tablespace datafile to be created. Enter Logical name (i.e. <b>DIRECTORY_NAME</b> column) from <b>DBA_DIRECTORIES</b> table NOT the physical path.	OPATCH_LOG_DIR
	<b>EHMS_DATABASESYS_USER</b>	Enter the username with 'sys' privileges	Sys
	<b>EHMS_DATABASE_SERVICE_ID</b>	Enter the EHMS database Service Name	obdxehms.in.oracle.com
	<b>EHMS_HOST_SCHEMA_NAME</b>	Enter the EXISTING EHMS HOST schema name	OBDXUBS
	<b>EHMS_CCY(to be configured for UBS and OBPM HOST only)</b>	Enter the Country code for EHMS HOME Branch	GB
	<b>EHMS_HB (to be configured for UBS and OBPM HOST only)</b>	Enter the Branch code for code for EHMS HOME Branch	AT3
	<b>EHMS_FCORE_FCUBS_SCHEMA_NAME (to be configured for FCORE HOST only)</b>	FCORE-FCUBS schema name	FCRUBSHOST

Component	Parameter	Description	Example
Weblogic server details	MIDDLEWARE_HOME	Oracle Weblogic Middleware home path. Example /home/obdxuser/Oracle/Middleware/Oracle_Home - where you have sub-directories like wlsrserver,oracle_common etc.	/home/obdxuser/Oracle/Middleware/Oracle_Home
	JAVA_HOME	Path where JAVA (JDK) is installed	/home/obdxuser/jdk18
	INSTALLATION_HOME	Path where OBDX is to be installed. All configuration files will be copied as a sub-directory "config" under this directory. <b>DO NOT KEEP INSTALLATION_HOME AS MiddlewareHome.</b>	/home/obdxuser/obdx
	WLS_DOMAIN_PATH	Path where OBDX Weblogic domain should be created. Users can now enter custom path as per their requirements.	/home/obdxuser/domains
	WLS_CLUSTER_NAME	Name of cluster; this cluster would have one single managed server.	obdx_cluster
	WLS_CLUSTER_NODE_HOSTNAME	Host name or IP address of managed server participating in the cluster. <b>Currently only single node is supported.</b>	ofss310759
	WLS_ADMIN_SERVER_PORT	Weblogic AdminServer port. It is the port to access the administration console of the Weblogic server. Generally port 7001 is used as the AdminServer port. <b>Custom port are supported.</b>	7001
	WLS_ADMIN_SERVER_SSL_PORT	AdminServer SSL port. It is the port used to securely access (https) the administration console of the Weblogic server.	7002
	WLS_NODE_PORT	Node Manager Port. It is the port used by Node Manager to be configured for OBDX domain. Generally, 5556 is utilized as Node Manager Port. <b>Custom ports are supported.</b>	5556

	WLS_MS_SERVER_NAME	Managed server name. This will be the name of the managed server created in the cluster followed by indexes. eg- <b>If this is set as 'clip' managed servers would be clip1.</b>	clip
	WLS_MS_SERVER_PORT	Managed Server Port. Managed server will utilize this port for hosting OBDX components and associated resources. <b>Custom ports are supported.</b>	9001
	WLS_DOMAIN_NAME	Enter Weblogic Domain name.	obdx_domain1
	WLS_DOMAIN_ADMIN_USER	Domain user ID. The user id will be used to access the Weblogic Administration console.	weblogic
	WLS_JMS_FILEUPLOAD_PS (to be configured for all OBDX supported HOST)	Set the paths for the persistent store of the FileUpload JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/FileUpload
	WLS_JMS_AUDIT_PS (to be configured for all OBDX supported HOST)	Set the paths for the persistent store of the Audit JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/Audit
	WLS_JMS_REPORT_PS (to be configured for all OBDX supported HOST)	Set the paths for the persistent store of the Reports JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/Reports
	WLS_JMS_JPA_PS (to be configured for all OBDX supported HOST)	Set the paths for the persistent store of the JPA JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/JPA
	WLS_JMS_EXTSYSRECEIVER_PS (to be configured for all OBDX supported HOST)	Set the paths for the persistent store of the ExtSystemReceiver JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/Receiver

	<b>WLS_JMS_EXTSYSSENDER_PS</b> <b>(to be configured for all OBDX supported HOST)</b>	Set the paths for the persistent store of the ExtSystemSender JMS modules. <b>DO NOT KEEP path as INSTALLATION_HOME or as sub directory inside INSTALLATION_HOME.</b>	/scratch/obdx/Sender
<b>RCU</b>	<b>OBDX_RCU_STB_PREFIX</b>	STB schema name prefix. If schema pre-fix is 'OBDX' then 'OBDX_STB' would be the STB schema name.	OBDX_STB
<b>OBDX Application Administrator user details</b>	<b>OBDX_ADMIN_USERNAME</b>	Set username for OBDX application Admin user. <b>USERNAME IS CASE SENSITIVE. In-case of OUD as provider username should be the User ID mentioned during user creation steps mentioned in pre-requisite document (refer To create User and mapping it to the Group section)</b>	superadmin
	<b>OBDX_ADMIN_EMAIL</b>	Enter the Email ID for OBDX application admin user.	superadmin@oracle.com
	<b>OBDX_ADMIN_CONTACT_NO</b>	Enter the mobile number for OBDX application admin user. <b>COUNTRY CODE IS MUST.</b>	+911234567890

---

**Note:** Apart from above any other property values should not be modified

---

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.

Login with OS user which was used to perform OBDX pre-requisite software installation (or has ownership on Oracle Weblogic home directory)

Ensure OBDX Installation home and filestore path's maintained in installer.properties exists and user running the installer has read-write permissions.



## Installation Steps:

- From your terminal navigate to <OBDX INSTALLER DIR>/

```
[ OBDX_Installer]$ pwd
/scratch/OPSFE/OBDX_Installer
[ OBDX_Installer]$ ls -ltr
Total 20
-rwxrwxrwx 1 54323 wheel 2569 Jun 28 12:04 runInstaller.py
drwxrwxrwx 12 54323 wheel 4096 Jun 28 12:04 installables
-rwxrwxrwx 1 54323 wheel 0 Jun 28 12:04 init__.py
drwxrwxrwx 5 54323 wheel 4096 Jun 29 13:15 core
drwxrwxrwx 5 54323 wheel 4096 Jun 29 13:15 framework
drwxrwxrwx 7 54323 wheel 4096 Jul 2 10:47 ExecInstances
[ OBDX_Installer]$
```

- Enter the following command

**python runInstaller.py**

Select the appropriate type of Installation

```
Please select the installation type from the
options below :


  OBDX Installation
  New Entity Creation

Use (↑/↓) to select between options
```

- OBDX Installation: This option should be used for first-time installation or for first entity only. Existing installation should not utilize this option unless performing “Reinstall” on already installed environment.
- New Entity Creation: This option should be used for multi-entity installation only.


Post selection of installation type.

Select the appropriate host system for Installation

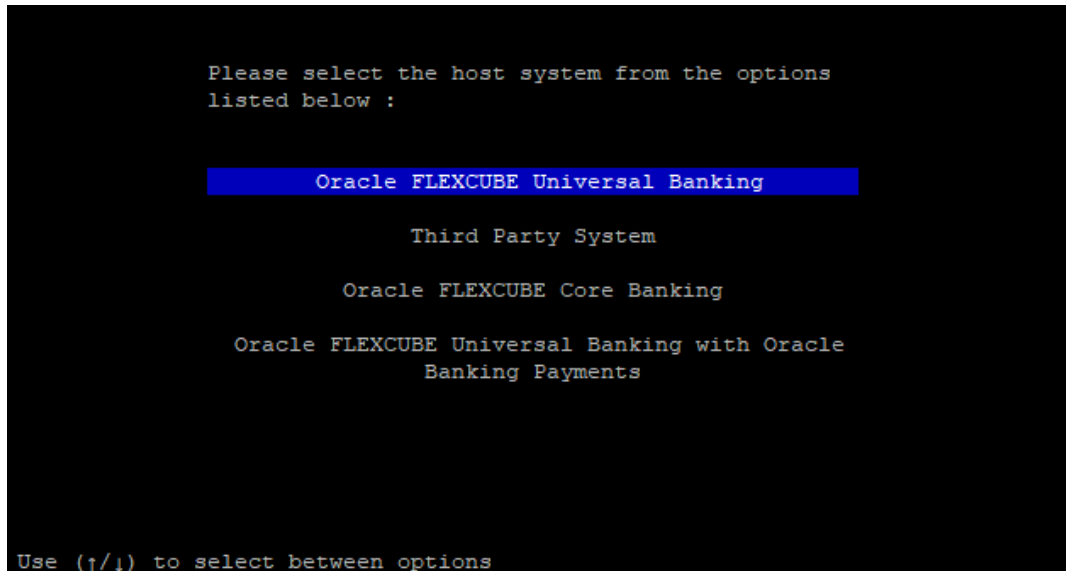

### Oracle FLEXCUBE Universal Banking (OBDX with UBS)

Select Installation mode

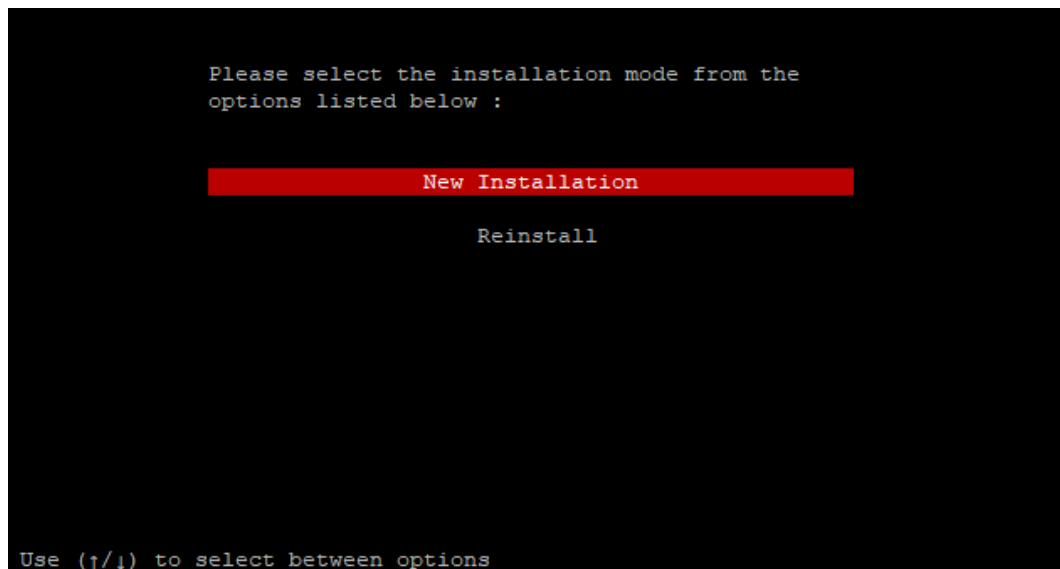

### Mode of Installation - New Installation

- New installation

In-case of a fresh installation of OBDX with appropriate host system for the first run on server.

Below screens would appear to taken end-user input

```

>>*****
Valid.
Enter password for the OBDX schema 'OBDX_191INS' :
>>*****
Valid.
Enter password for the STB schema 'OBDX191INS_STB' :
>>*****
Valid.
Enter password for the weblogic domain user id 'weblogic' :
>>*****
Valid.
Enter the password for the user with sys privileges of UBS database 'sys' :
>>*****
Valid.
Enter password for the UBS schema 'FC1420SDC' (Existing) :
>>*****
Valid.
Enter password for the UBS schema 'B1A1_UBS143_191INS' (new) :
>>*****
Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

```

### Enter below passwords:

- SYS privilege user password where OBDX schema would be created
- OBDX schema password
- OBDX STB schema password
- Weblogic console administrator user password
- SYS privilege user password where UBS host schema exists
- Existing UBS HOST schema password
- New OBDX EHMS schema password
- Password for OBDX application administrative user (In-case of OUD as provider, password should be similar to one used while user creation in OUD (or User Password field))

### Third Party System (OBDX with THP)

Post Third Party System selection, enter the required credentials details



**Enter below passwords:**

- SYS privilege user password where OBDX schema would be created
  - OBDX schema password
  - OBDX STB schema password
  - Weblogic console administrator user password
- OBDX application admin user password (In-case of OUD as provider, password should similar to one used while user creation in OUD (or User Password field))

**Oracle FLEXCUBE Core Banking (OBDX with FCORE)**

Post Oracle FLEXCUBE Core Banking, enter the required credentials details



**Enter below passwords:**

- SYS privilege user password where OBDX schema would be created
- OBDX schema password
- OBDX STB schema password
- Weblogic console administrator user password
- SYS privilege user password where FCORE host schema exists
- New OBDX EHMS schema password
- Password for OBDX application administrative user (In-case of OUD as provider, password should be similar to one used while user creation in OUD (or User Password field))

**Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM)**

Enter the required credentials details

```


>>*****
Valid.
Enter password for the STB schema 'OBDXINS_STB' :
>>*****
Valid.
Enter password for the weblogic domain user id 'weblogic' :
>>*****
Valid.
Enter the password for the user with sys privileges of OBPM database 'sys' :
>>*****
Valid.
Enter password for the OBPM schema 'OBPM143' (Existing) :
>>*****
Valid.
Enter password for the OBPM schema 'B1A1_FCORE' (new) :
>>*****
Valid.
Enter password for the Admin User 'superadmin' :
>>*****
Use (t/i) keys to navigate between questions and press 'enter' after editing them

```

**Enter below passwords:**

- SYS privilege user password where OBDX schema would be created
- OBDX schema password
- OBDX STB schema password
- Weblogic console administrator user password
- SYS privilege user password where OBPM host schema exists
- Existing OBPM HOST schema password
- New OBDX EHMS schema password
- Password for OBDX application administrative user (In-case of OUD as provider, password should be similar to one used while user creation in OUD (or User Password field))

## Mode of Installation – Reinstall

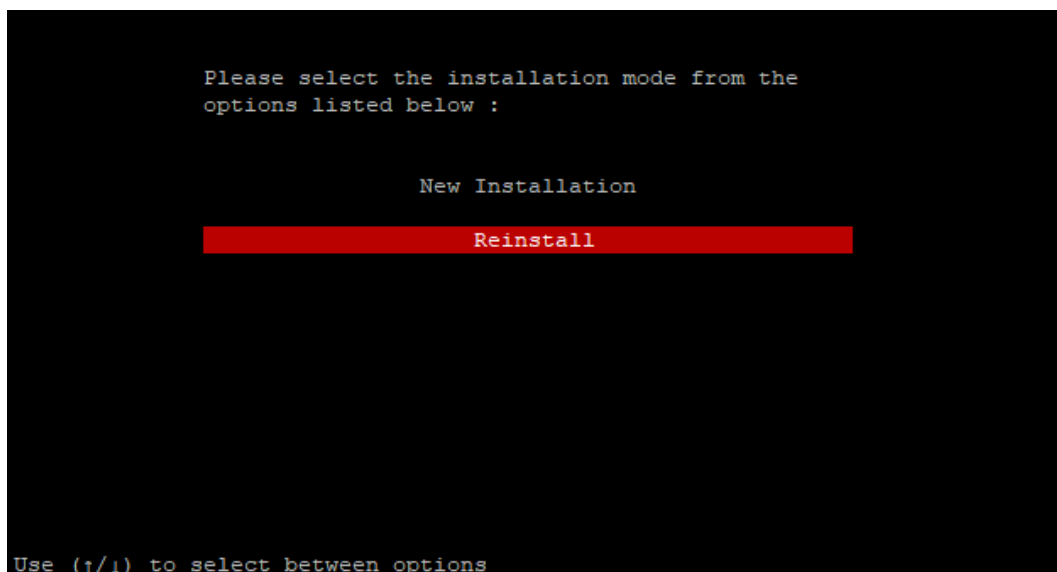

In-case of an existing OBDX installation that you want to overwrite OR in case of a previously failed installation user can opt for this option.

### **Pre-requisites**

- Weblogic domain processes should be down (i.e. AdminServer, NodeManager, Managed Servers, Derby etc)
- No open session (user should not be logged-in) with OBDX database schema (and OBDX EHMS schema in-case of OBDX UBS;OBPM and FCORE flavor) and RCU schema.

Over-write the policies files (Day0Policy.csv; Entitlement.csv; Resources.csv and Task.csv) from OBDX Product zip into <OBDX INSTALLER DIR>/installables/policies directory

### **Key pointers**

- OBDX schema (and OBDX EHMS schema in-case of OBDX UBS flavor) and RCU schema would be dropped and recreated (as per installer.properties). Tablespace would be re-used.
- Weblogic domain (as per installer.properties) would be deleted and created again.
- Installation Home would be cleaned up (all files/ sub-directories would be deleted) and re-created again.

---

**Note:** All input screens are similar to new installation option and as per the host system opted.

---

## Installation Status

After selecting the mode and entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

```

@devops$ |& python subinstaller.py

>>> STARTING OBIX PRODUCT INSTALLATION <<<<

Starting OBIX Database Installation with UMS141 FLAVOR
Tablespace with name OBIX_183INS and OBIX_AUDIT_183INS exists
Dropping User...
Objects dropped
Schema dropped
Role dropped
Creating User...
User Created
Creating Role...
Role Created
Executing Grants...
Execution of clip_master_script.sql started
Execution of clip_master_script.sql completed
Execution of clip_constraints.sql started
Execution of clip_constraints.sql completed
Execution of clip_seeds_executable.sql started
Execution of clip_seeds_executable.sql completed
Execution of clip_master_generic_test_script.sql started
Execution of clip_master_generic_test_script.sql completed
SUCCESSFULLY installed OBIX database

Starting UMS141 Database Installation...
Table space with name TBS_BI141_183INS exists
Dropping User...
Objects dropped
Schema dropped
Role dropped
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
Execution of table-scripts.sql started
Execution of table-scripts.sql completed
Execution of uba_object_scripts.sql started
Execution of uba_object_scripts.sql completed

```

When the installation completes, the below message is displayed

```

@obdxwls/scratch/obdx/v4/OBDX_183.0.0
-  X
<Dec 15, 2018 7:14:16 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.thirdparty.app.domain [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.thirdparty.app.domain.ear], to AdminServer obdx_cluster .>
<Dec 15, 2018 7:14:18 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.rest.idm [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.app.rest.idm.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:19 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, BatchResourceAdapter [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/BatchResourceAdapter.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:19 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, AuditMDBEAR [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/AuditMDBEAR.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:19 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, com.offss.digx.app.connector [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/com.offss.digx.app.connector.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:20 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.mdb.report [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.app.mdb.report.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:20 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.timer [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.app.timer.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:20 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.oauth [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.app.oauth.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:21 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.app.domain [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/cz/obdx.cz.app.domain.ear], to AdminServer obdx_cluster .>
<Dec 15, 2018 7:14:21 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.extsystem.domain [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/cz/obdx.cz.extsystem.domain.ear], to obdx_cluster AdminServer .>
<Dec 15, 2018 7:14:22 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.thirdparty.app.domain [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/cz/obdx.cz.thirdparty.app.domain.ear], to AdminServer obdx_cluster .>
<Dec 15, 2018 7:14:23 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.soap [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/obdx/deploy/obdx.app.soap.ear], to obdx_cluster .>
<Dec 15, 2018 7:14:23 PM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, ExtxfaceSimulatorMDB [archive: /scratch/obdx/v4/OBDX_18.3.0.0/installeables/app/components/thp/deploy/ExtxfaceSimulatorMDB.ear], to obdx_cluster .>
Applications deployed successfully
Starting AdminServer
AdminServer started
Successfully created and configured OBEX183INS domain
<Dec 15, 2018 7:16:22 PM UTC> <Warning> <JNDI> <BEA-050001> <WLContext.close() was called in a different thread than the one in which it was created.>
Successfully configured jps-config.xml
Successfully Setup and Configured WEBLOGIC...

>>> OBIX PRODUCT INSTALLATION COMPLETED SUCCESSFULLY <<<<

```

[Home](#)

## 5. Installation using Silent Mode

This chapter describes how to run the OBDX installer in silent mode.

### What is silent-mode installation?

During installation in silent mode, the installation program reads the details for your configuration parameters (flavor; mode; passwords etc) from the environment variables (same session in which installer is executed) and installer.properties that you set before beginning the installation. The installation program does not display any configuration options during the installation process.

### Steps for Silent-Mode Installation

- Download and extract the installer zip file (Base – non localization version).
- Navigate to “<OBDX INSTALLER DIR>/core/config”
- Open the “installer.properties” file to maintain key configurations for BASE ENTITY (OBDX\_BU)  
\*\*Refer to page 9 to 14 (step 4) for filling up installer.properties.
- Set the environment variables , as shown below

```
OBDX_Installer]$  
OBDX_Installer]$ export FLAVOUR=UBS  
OBDX_Installer]$ export MODE=New  
OBDX_Installer]$ export DB_SYS_PASSWORD=welcomel  
OBDX_Installer]$ export SCHEMA_PASS=welcomel  
OBDX_Installer]$ export STBPassword=welcomel  
OBDX_Installer]$ export DomainPassword=welcomel  
OBDX_Installer]$ export EHMS_DATABASE_SYS_PASS=devopshst  
OBDX_Installer]$ export EHMS_HOST_SCHEMA_NAME_PASS=FC140UBS  
OBDX_Installer]$ export EHMS_SCHEMA_PASS=welcomel
```



Below parameters should be set as environment variables, depending on the Host system the installer should be executed.

Host	Parameter	Description	Example
<b>Environment variables to set for flavor:</b>  <b>FCORE;</b> <b>UBS</b> <b>(14.3.0.0.0 release)</b> <b>OBPM(14.3.0.0.0)</b>	<b>FLAVOUR</b>	Flavour for installation  <b>UBS</b> for Oracle FLEXCUBE Universal Banking 14.3.0.0.0 (OBDX with UBS)  <b>OBPM</b> for Oracle FLEXCUBE Universal Banking with Oracle Banking Payments 14.3.0.0.0 (OBDX with OBPM)  <b>FCORE</b> for Oracle FLEXCUBE Core Banking 11.7.0.0.0 (OBDX with FCORE)	<b>export FLAVOUR=UBS</b> <b>or</b> <b>export FLAVOUR=OBPM</b> <b>or</b> <b>export FLAVOUR=FCORE</b>
	<b>MODE</b>	Mode of installation. <b>'New'</b> in-case of a fresh installation of OBDX for the first run on server <b>'Clean'</b> in-case of an existing OBDX installation that you want to overwrite OR in case of a previously failed installation or re-installation	<b>export MODE=New</b> <b>or</b> <b>export MODE=Clean</b>
	<b>DB_SYS_PASSWORD</b>	Sys user password of OBDX database (Existing)	<b>export DB_SYS_PASSWORD=obdx182sys</b>
	<b>SCHEMA_PASS</b>	Password for new schema on OBDX database	<b>export SCHEMA_PASS=obdx#182</b>
	<b>STBPassword</b>	Password for RCU	<b>export</b>

		STB schema	<b>STBPassword=obdx182#stb</b>
	<b>DomainPassword</b>	Password for Weblogic Administrator console	<b>export DomainPassword=wlsadm</b>
	<b>EHMS_DATABASE_SYS_PASS</b>	Sys user password of EHMS HOST database (Existing)	<b>export EHMS_DATABASE_SYS_PASS=obdxehmssys</b>
	<b>EHMS_HOST_SCHEMA_NAME_PASS</b>  <b>** Only required for UBS &amp; OBPM Host. Ignore this parameter in-case of FCORE Host</b>	Password of existing EHMS HOST schema (Existing)	<b>export EHMS_HOST_SCHEMA_NAME_PASS=obdxehmshost</b>
	<b>EHMS_SCHEMA_PASS</b>	Password for new OBDX EHMS schema on EHMS HOST database	<b>export EHMS_SCHEMA_PASS=obdx182ehms</b>
	<b>DBAuthPassword</b>	Password for new OBDX Administrator user of OBDX application (In-case of OUD as provider, password should similar to one used while user creation in OUD(or User Password field))	<b>export DBAuthPassword=obdxadm</b>
<b>Environment variables to set for flavor: OBDX (Third-party HOST)</b>	<b>FLAVOUR</b>	Flavour for installation  <b>'OBDX'</b> for Third Party System 1.0 (OBDX with THP)	<b>export FLAVOUR=OBDX</b>
	<b>Mode</b>	Mode of installation.  <b>'New'</b> in-case of a fresh installation of OBDX for the first run on server  <b>'Clean'</b> in-case of an existing OBDX installation that you want to overwrite OR in case of a previously failed installation or re-	<b>export MODE=New</b> <b>or</b> <b>export MODE=Clean</b>

		installation	
<b>DB_SYS_PASSWORD</b>	Sys user password of OBDX database (Existing)		<b>export DB_SYS_PASSWORD=obdx182sys</b>
<b>SCHEMA_PASS</b>	Password for new schema on OBDX database		<b>export SCHEMA_PASS=obdx#182</b>
<b>STBPassword</b>	Password for RCU STB schema		<b>export STBPassword=obdx#stb</b>
<b>DomainPassword</b>	Password for Weblogic Administrator console		<b>export DomainPassword=wlsadmn</b>
<b>DBAuthPassword</b>	Password for new OBDX Administrator user of OBDX application (In-case of OUD as provider, password should similar to one used while user creation in OUD(or User Password field))		<b>export DBAuthPassword=obdxadm</b>

Run the runInstaller.py file with '--silent' argument along with '--base' option

```

[ OBDX_Installer]$
[ OBDX_Installer]$ python runInstaller.py --silent --base
    
```

**Installation Status**

The status is displayed on the terminal to indicate the progress of the installation.

```

[develop] OBDX_Installer]$ python runInstaller.py --silent --base
Password validated for sys
Password validated for sys
Password validated for OBPMS1
>>> STARTING OBDX PRODUCT INSTALLATION <<<<

Starting OBDX Database Installation with OBPMS1 FLAVOR
Tablespace with name OBDX_182INS and OBDX_AUDIT_182INS exists
Dropping User...
Objects dropped
Schema dropped
Role dropped
Creating User...
User Created
Creating Role...
Role Created
Executing Grants...
Execution of clip_master_script.sql started
Execution of clip_master_script.sql completed
Execution of clip_constraints.sql started
Execution of clip_constraints.sql completed
Execution of clip_seeds_executable.sql started
Execution of clip_seeds_executable.sql completed
Execution of clip_master_generic_rest_script.sql started
Execution of clip_master_generic_rest_script.sql completed
SUCCESSFULLY installed OBDX database

Starting OBPMS1 Database Installation...
Table space with name TBS_BIAl_OBPMS1_182INS exists
Dropping User
Objects dropped
Schema dropped
Role dropped
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
    
```

When the installation completes, the below message is displayed

```

PuTTY (inactive)
<Dec 16, 2018 7:19:49 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.thirdparty.app.domain [archive: /scratch/obdx
/OBDX_Installer/installables/app/components/obdx/deploy/obdx.thirdparty.app.domain.ear], to AdminServer obdx_cluster .>
<Dec 16, 2018 7:19:52 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.rest.idm [archive: /scratch/obdx/OBDX_Insta
ller/installables/app/components/obdx/deploy/obdx.app.rest.idm.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:13 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, BatchResourceAdapter [archive: /scratch/obdx/OBDX_
Installer/installables/app/components/obdx/deploy/BatchResourceAdapter.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:18 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, AuditMDBEAR [archive: /scratch/obdx/OBDX_Installe
r/installables/app/components/obdx/deploy/AuditMDBEAR.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:14 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, com.ofss.digx.app.connector [archive: /scratch/obd
x/OBDX_Installer/installables/app/components/obdx/deploy/com.ofss.digx.app.connector.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:15 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.mdb.report [archive: /scratch/obdx/OBDX_I
nstaller/installables/app/components/obdx/deploy/obdx.app.mdb.report.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:15 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.timer [archive: /scratch/obdx/OBDX_Instal
ler/installables/app/components/obdx/deploy/obdx.app.timer.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:15 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.oauth [archive: /scratch/obdx/OBDX_Instal
ler/installables/app/components/obdx/deploy/obdx.app.oauth.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:16 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.app.domain [archive: /scratch/obdx/OBDX_In
staller/installables/app/cz/obdx.cz.app.domain.ear], to obdx_cluster AdminServer .>
<Dec 16, 2018 7:20:16 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.exstsystem.domain [archive: /scratch/obdx/O
BDX_Installer/installables/app/cz/obdx.cz.exstsystem.domain.ear], to AdminServer obdx_cluster .>
<Dec 16, 2018 7:20:16 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.cz.thirdparty.app.domain [archive: /scratch/o
bdx/OBDX_Installer/installables/app/cz/obdx.cz.thirdparty.app.domain.ear], to AdminServer obdx_cluster .>
<Dec 16, 2018 7:20:16 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, obdx.app.soap [archive: /scratch/obdx/OBDX_Installe
r/installables/app/components/obdx/deploy/obdx.app.soap.ear], to obdx_cluster .>
<Dec 16, 2018 7:20:17 AM UTC> <Info> <J2EE Deployment SPI> <BEA-260121> <Initiating deploy operation for application, ExtifaceSimulatorMDB [archive: /scratch/obdx/OBDX_
Installer/installables/app/components/thp/deploy/ExtifaceSimulatorMDB.ear], to obdx_cluster .>
Applications deployed successfully
Starting AdminServer
AdminServer started
Successfully created and configured OBDX183INS domain
<Dec 16, 2018 7:23:40 AM UTC> <Warning> <JNDI> <BEA-050001> <WLContext.close() was called in a different thread than the one in which it was created.>
Successfully configured jps-config.xml
Successfully Setup and Configured WEBLOGIC...

>>>> OBDX PRODUCT INSTALLATION COMPLETED SUCCESSFULLY <<<<

[devops@obdxwls OBDX_Installer]$

```

[Home](#)

## 6. Installer Verification

Each execution creates a new directory as <DDMonthHHMM> under <OBDX INSTALLER DIR>/ExecInstances directory where installer execution logs as described below are stored.

Log Description	PATH
Summarized Installer Activity Log	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/obdx_installer.log
Summarized Database Logs	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/DB_installation.log
Detailed OBDX DB Logs per SQL file	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/OBDX/*
Detailed EHMS schema Logs per SQL file (specific to EHMS host system only)	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/<EHMSHOST>/*  <EHMSHOST> - values such as; FCORE; OBPM;; UBS
RCU Logs	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/app/obdx_stb_rcu_1600.log
Weblogic Configuration Logs	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/app/obdx_wls_post.log
Detailed OBDX policy seeding logs	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/Entitlement.log <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/Task.log <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/Dashboard_seed.log  Note: Check for SEVERE keyword; If found refer to Troubleshoot section to re-run the policy
Policy seeding execution Log	<OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/seedPolicies.log  Note: Should be empty if no errors during policy execution. In-case non-empty refer to Troubleshoot section to re-run the policy

Check all the logs for any errors.

[Home](#)

## 7. Installer Scope

OBDX Installer currently covers below activities:

**Flavor: Third Party system (OBDX with THP)**

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBDX with THP	OBDX DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
		Compile Schema	√	√
		Policy Seeding	√	√
	Weblogic Setup and Configuration	RCU schema and Create Domain	√	√ (drop and re-create RCU schema's)
		Create and Configure AdminServer, Machine, Managed Server and Cluster	√	√
		Configure NodeManager	√	√
		Configure JDBC	√	√
		Configure DB Authenticator, JMS servers, Persistent stores and JMS Modules	√	√
		Application Deployment	√	√
		JTA	√	√
		Enable Production Mode	√	√
		Start AdminServer and NodeManager	√	√
	OBDX Configuration	Copy config files into OBDX Installation Home	√	√ (Delete old and copy new from installer zip)

**Flavor: Oracle FLEXCUBE Universal Banking (OBDX with UBS)**

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBDX with UBS (14.3.0.0.0 version)	OBDX DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
		Execute UBS HOST specific scripts	√	√
		Compile Schema	√	√
		Policy Seeding	√	√
	EHMS DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
		Compile Schema	√	√
	Weblogic Setup and Configuration	RCU schema and Create Domain	√	√ (drop and re-create RCU schema's)
		Create and Configure AdminServer, Machine, Managed Server and Cluster	√	√
		Configure NodeManager	√	√
		Configure JDBC	√	√
		Configure DB Authenticator, JMS servers, Persistent stores and JMS	√	√

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
		Modules		
		Application Deployment	√	√
		JTA	√	√
		Enable Production Mode	√	√
		Start AdminServer and NodeManager	√	√
	OBDX Configuration	Copy config files into OBDX Installation Home	√	√ (Delete old and copy new from installer zip)

**Flavor: Oracle FLEXCUBE Core Banking (OBDX with FCORE)**

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBDX with FCORE	OBDX DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
		Compile Schema	√	√
		Policy Seeding	√	√
	EHMS DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
Compile Schema		√	√	



Flavor	Activity	Detailed Activity List	New Installation	Reinstall
	Weblogic Setup and Configuration	RCU schema and Create Domain	√	√ (drop and re-create RCU schema's)
		Create and Configure AdminServer, Machine, Managed Server and Cluster	√	√
		Configure NodeManager	√	√
		Configure JDBC	√	√
		Configure DB Authenticator, JMS servers, Persistent stores and JMS Modules	√	√
		Application Deployment	√	√
		JTA	√	√
		Enable Production Mode	√	√
		Start AdminServer and NodeManager	√	√
	OBDX Configuration	Copy config files into OBDX Installation Home	√	√ (Delete old and copy new from installer zip)

**Flavor: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM)**

Flavor	Activity	Detailed Activity List	New Installation	Reinstall
OBDX with OBPM (14.3.0.0.0 version)	OBDX DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√


Flavor	Activity	Detailed Activity List	New Installation	Reinstall
		Execute OBPM HOST specific scripts	√	√
		Compile Schema	√	√
		Policy Seeding	√	√
	EHMS DB Setup	Create Tablespace	√	NA
		Create Schema and Role	√	√ (drop and re-create objects)
		Grants	√	√
		Load DB object (DDL's and DML's)	√	√
		Compile Schema	√	√
	Weblogic Setup and Configuration	RCU schema and Create Domain	√	√ (drop and re-create RCU schema's)
		Create and Configure AdminServer, Machine, Managed Server and Cluster	√	√
		Configure NodeManager	√	√
		Configure JDBC	√	√
		Configure DB Authenticator, JMS servers, Persistent stores and JMS Modules	√	√
		Application Deployment	√	√
		JTA	√	√
		Enable Production Mode	√	√
	OBDX Configuration	Copy config files into OBDX Installation Home	√	√ (Delete old and copy new from installer zip)

[Home](#)


## 8. Post Installation Steps

Once Installation is successful and no errors are observed, proceed with below set of steps.

Login Weblogic Admin console.

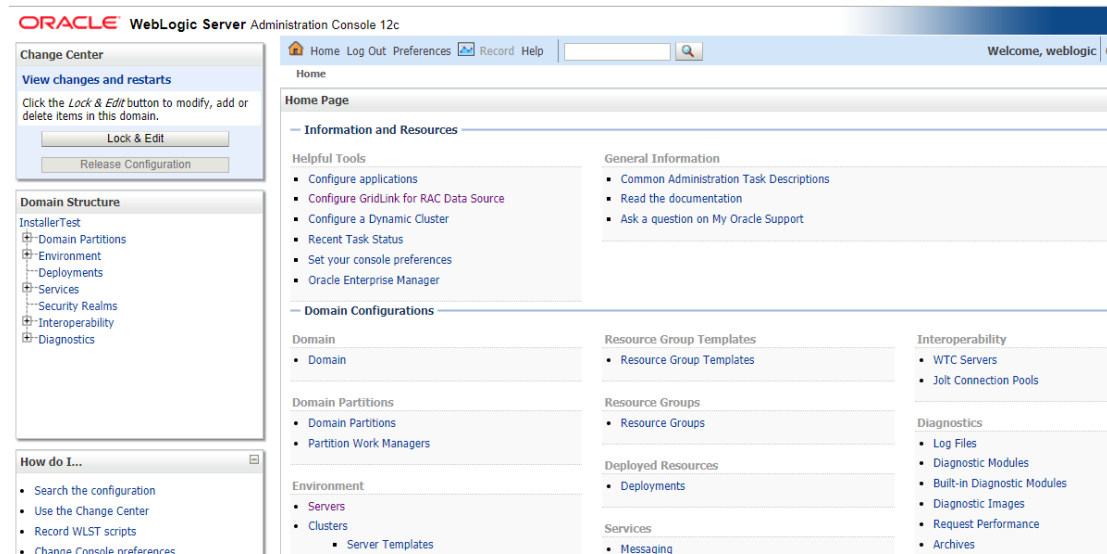

In the left panel of the Console, Click on **Deployments**, A table in the right pane displays all deployed Enterprise Applications and Application Modules.

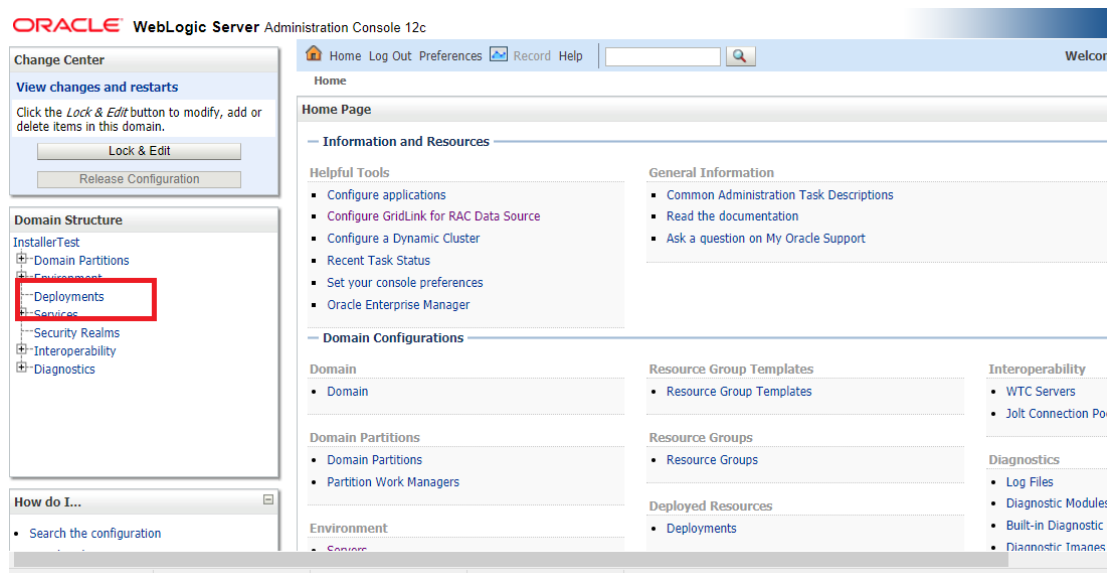

In the table, locate the **oracle.wsm.idmrest.sharedlib(1.0,12.2.1.3)** library to re-target and click on its name.


<input type="checkbox"/>	oracle.bi.jbips(11.1.1.0.1)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.dconfig-infra(2.0,12.2.1)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.jrf.system.filter	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.jsp.next(12.2.1,12.2.1)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.pwdgen(2.0,12.2.1)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.sdp.client(2.0,12.2.1.3.0)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.sdp.messaging(2.0,12.2.1.3.0)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.webcenter.composer(2.0,12.2.1)	Active		Library	AdminServer	Global		300
<input type="checkbox"/>	oracle.webcenter.skin(2.0,12.2.1)	Active		Library	AdminServer	Global		300
<input type="checkbox"/>	oracle.wsm.console.core.view(1.0,12.2.1.3)	Active		Library	AdminServer	Global		311
<input type="checkbox"/>	oracle.wsm.idmrest.sharedlib(1.0,12.2.1.3)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oracle.wsm.seedpolicies(2.0,12.2.1.3)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	oral18n-adf(11,11.1.1.1.0)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	owasp.esapi(2.0,12.2.1)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	state-management-provider-memory-rar	Active	OK	Resource Adapter	AdminServer	Global		100
<input type="checkbox"/>	UDX(11,12.2.1.3.0)	Active		Library	AdminServer	Global		100
<input type="checkbox"/>	wsm-pm	New		Enterprise Application	obdx_cluster	Global		5

Click on **Lock & Edit**


The screenshot shows the Oracle WebLogic Server Administration Console. On the left, the 'Change Center' panel has a 'Lock & Edit' button highlighted with a red box. The main area displays the 'Settings for oracle.wsm.idmrest.sharedlib(1.0,12.2.1.3)' page. The 'Overview' tab is selected, showing configuration details for the library.

Property	Value	Description
Name:	oracle.wsm.idmrest.sharedlib	The name of this Java EE library. <a href="#">More Info...</a>
Scope:	Global	Specifies if this library is accessible within the domain resource group template. <a href="#">More Info...</a>
Specification Version:	1.0	The specification version, specified from the manifest deployment. <a href="#">More Info...</a>
Implementation Version:	12.2.1.3	The implementation version, specified from the manifest deployment. <a href="#">More Info...</a>


Click on **Targets** Tab

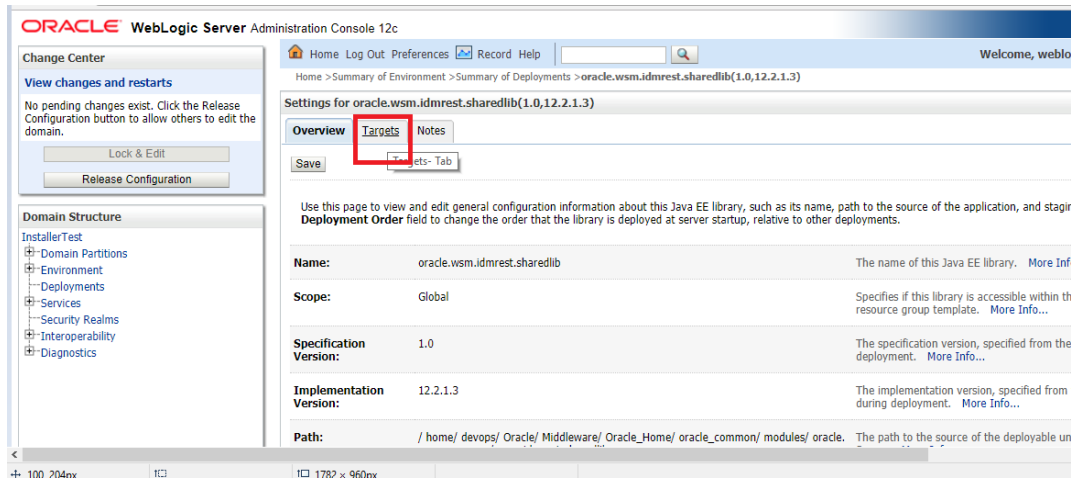


In the Servers box, select **Cluster** if it is not already selected and click **Save**.

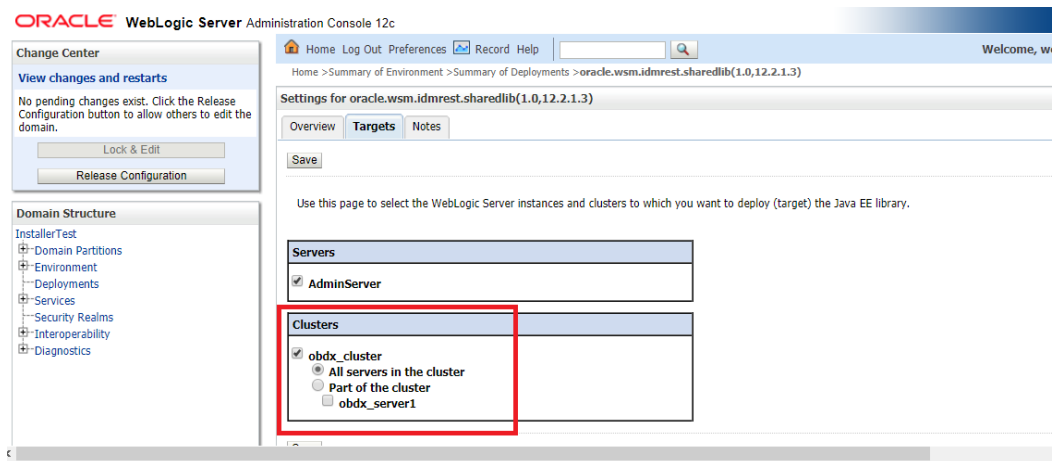


Click on **Activate Changes**.

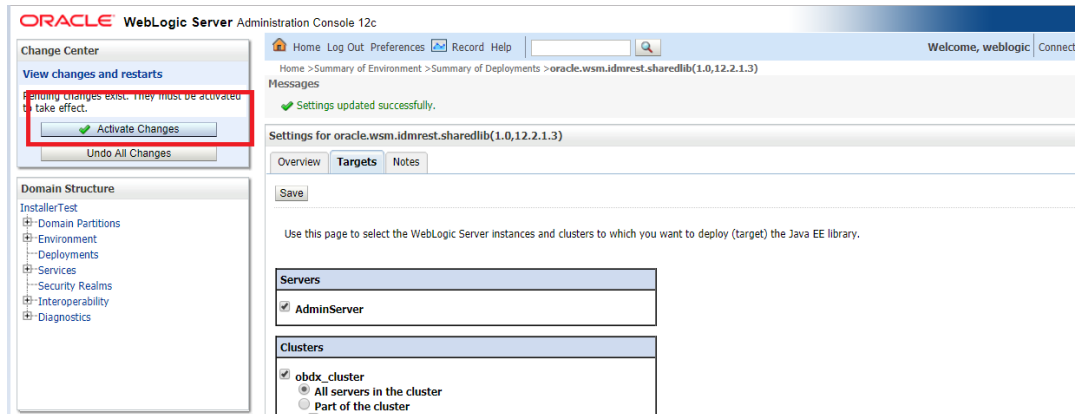


Click on **Home Tab**

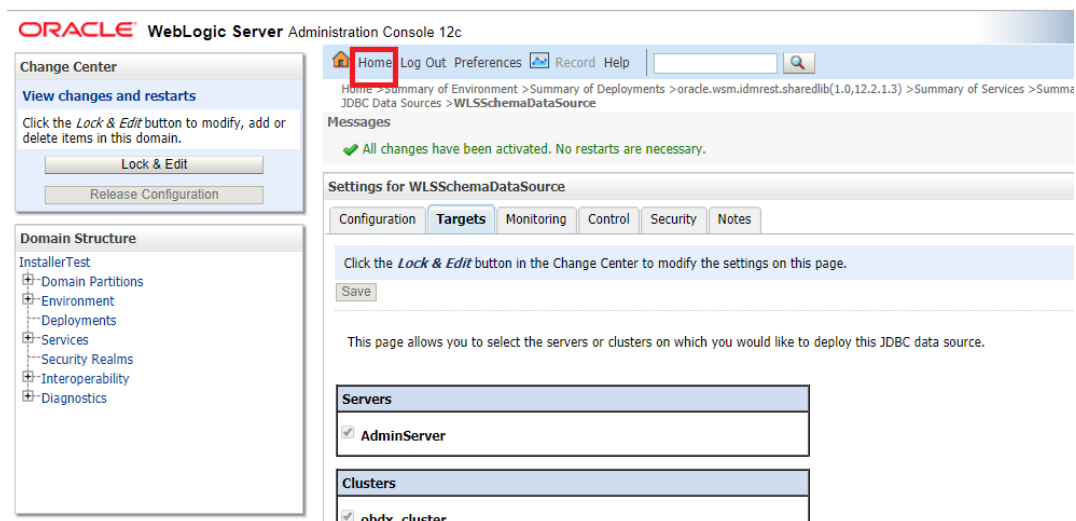

In the left panel of the Console, Click on **Services**,

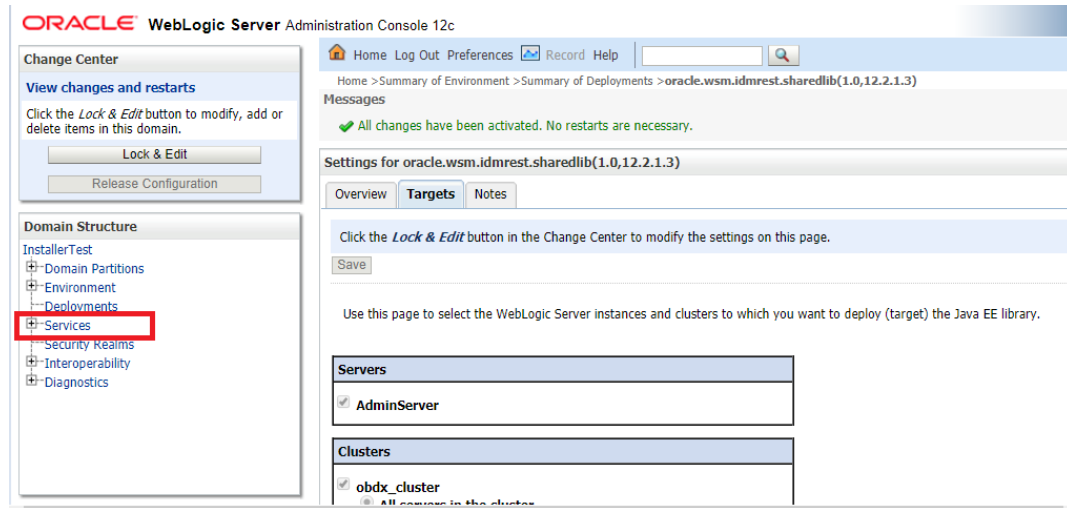

Click on **Data Sources**

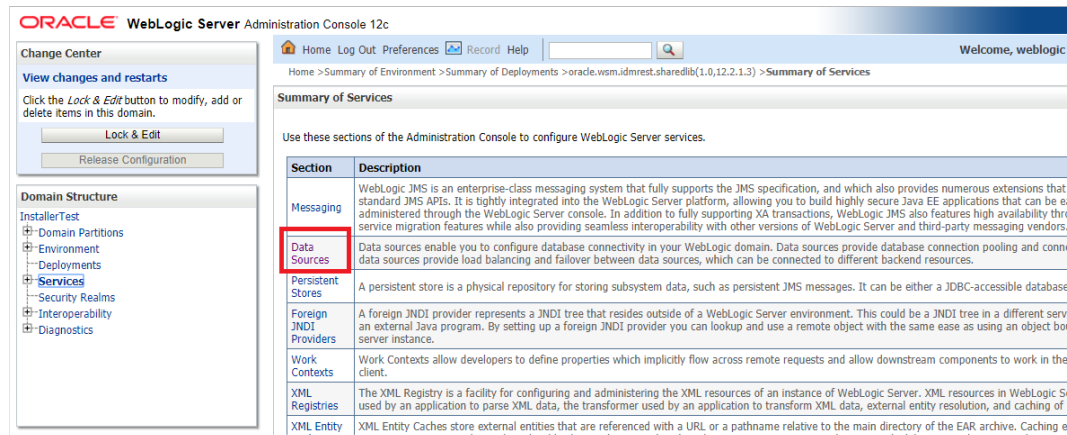

Locate **WLSSchemaDataSource** to change target ,click on its name

**Data Sources (Filtered - More Columns Exist)**

Click the *Lock & Edit* button in the Change Center to activate all the buttons on this page.

Name	Type	JNDI Name	Targets
BATCH	Generic	BATCH	obdx_cluster
DIGX	Generic	DIGX	obdx_cluster
LocalSvcTbiDataSource	Generic	jdbc/LocalSvcTbiDataSource	AdminServer
mids-owsm	Generic	jdbc/mids/owsm	AdminServer, obdx_cluster
NONXA	Generic	NONXA	obdx_cluster
opss-audit-DBDS	Generic	jdbc/AuditAppendDataSource	AdminServer, obdx_cluster
opss-audit-viewDS	Generic	jdbc/AuditViewDataSource	AdminServer, obdx_cluster
opss-data-source	Generic	jdbc/OpssDataSource	AdminServer, obdx_cluster
<b>WLSSchemaDataSource</b>	Generic	jdbc/WLSSchemaDataSource	

Click on **Targets** Tab

**ORACLE WebLogic Server Administration Console 12c**

Home > Summary of Environment > Summary of Deployments > oracle.wsm.jdmrest.sharedlib(1.0,12.2.1.3) > Summary of Services > Summary of JDBC D

**Settings for WLSSchemaDataSource**

Configuration **Targets** Monitoring Control Security Notes

General Connection **Targets-Tab** ONS Transaction Diagnostics Identity Options

Click the *Lock & Edit* button in the Change Center to modify the settings on this page.

Save


Applications get a database connection from a data source by looking up the data source on the Java Naming and Directory Interface (JNDI) data source provides the connection to the application from its pool of database connections.

This page enables you to define general configuration options for this JDBC data source.


<b>Name:</b>	WLSSchemaDataSource	A unique name that identifies the domain. <a href="#">More Info...</a>
<b>Datasource Type:</b>	GENERIC	The data source type. Valid values are: Generic, Local, and Remote.
<b>Scope:</b>	Global	The scope in which the data source is available.




Click on **Lock & Edit**

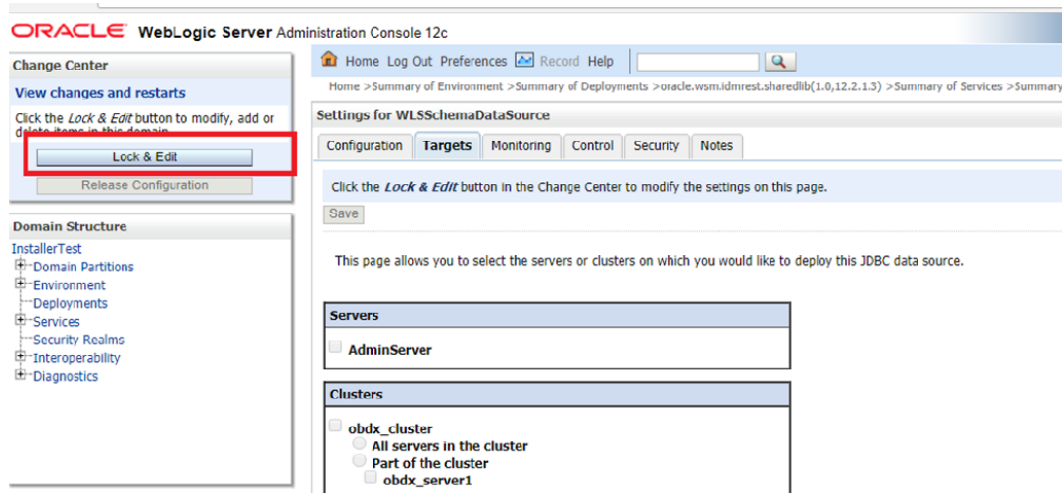

In the Servers Box, select **AdminServer** & **OBDX Cluster** and Click on **Save**

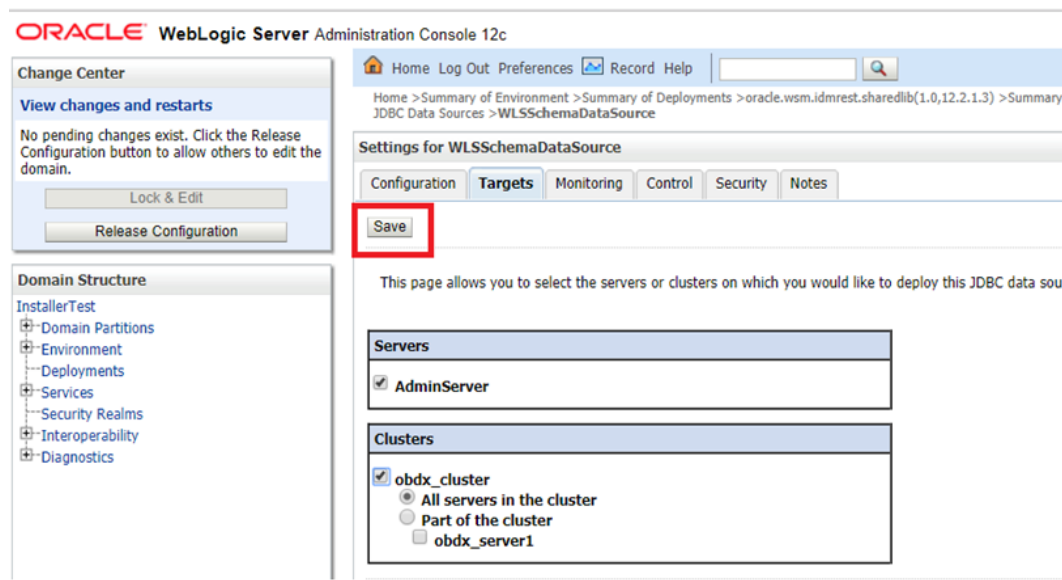


Click on **Activate Changes**

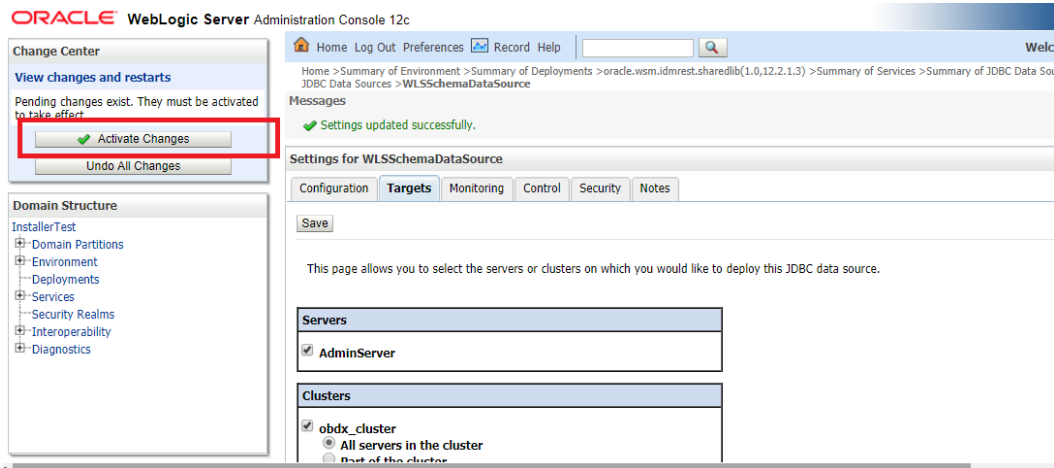

**Outbound credential mappings**

Login Weblogic Admin Console. Click on Deployments.

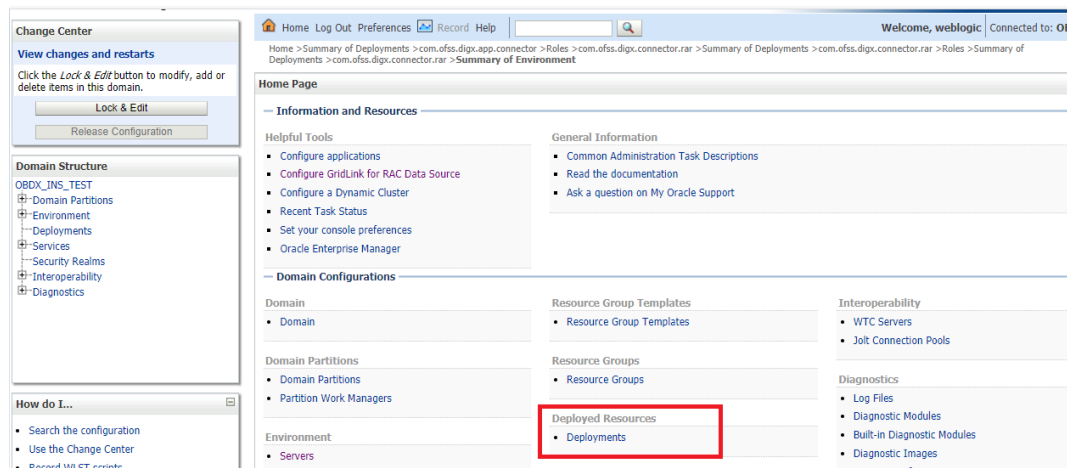

Click on com.ofss.digx.app.connector > com.ofss.digx.connector.rar

Name	Status	Health	Type	Parent	Environment	Version
adf.oracle.domain.webapp.batik-bundle(1.0,12.2.1.3.0)	Active		Library	AdminServer, InstallerTest	Global	100
adf.oracle.domain.webapp.guava(1.0,12.2.1.3.0)	Active		Library	AdminServer, InstallerTest	Global	100
adf.oracle.domain.webapp.xml-apis-ext(1.0,12.2.1.3.0)	Active		Library	AdminServer, InstallerTest	Global	100
AuditMDEAR	Active	OK	Enterprise Application	InstallerTest	Global	100
BatchResourceAdapter	Active	OK	Enterprise Application	InstallerTest	Global	100
coherence-transaction-rar	Active	OK	Resource Adapter	AdminServer, InstallerTest	Global	100
com.ofss.digx.app.connector	Active	OK	Enterprise Application	InstallerTest	Global	100
Modules						
com.ofss.digx.connector.rar			Resource Adapter			
EJBs						
None to display						
Web Services						
None to display						
DHS Application (12.2.1.1.0)	Active	OK	Web Application	AdminServer, InstallerTest	Global	5
em	Active	OK	Enterprise Application	AdminServer	Global	400
emagentsdkimplriv_jar(12.4,12.1.0.4.0)	Active		Library	AdminServer	Global	100

Click on **Security Tab** > **Outbound Credential Mappings**

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected

Settings for com.ofss.digx.connector.rar

Overview Configuration **Security** Control Testing Monitoring

This page displays basic information about this resource adapter.

**Name:** com.ofss.digx.connector.rar The name of this application deployment. [More Info...](#)

**Source Path:** servers/AdminServer/upload/com.ofss.digx.app.connector/app/com.ofss.digx.app.connector.ear The path to the source of the deployable unit on the Ac Server. [More Info...](#)

Click on **New**

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: OBDX\_INS

Settings for com.ofss.digx.connector.rar

Overview Configuration **Security** Control Testing Monitoring

Roles Policies **Outbound Credential Mappings** Inbound Principal Mappings Principals

Outbound credential mappings let you map WebLogic Server usernames to usernames in the Enterprise Information System (EIS) to which you want to connect using a resource adapter. You can use default outbound credential mappings for all outbound connection pools in the resource adapter, or specify particular outbound credential mappings for individual connection pools. This page contains the table of outbound credential mappings for this resource adapter.

Customize this table

Outbound Credential Mappings

New Delete Showing 0 to 0 of 0 Previous | N

WLS User	EIS User	Outbound Connection Pool
There are no items to display		

New Delete Showing 0 to 0 of 0 Previous | N

Select **ra/DIGXConnectorAES** > **Next**

Home > Summary of Deployments > com.ofss.digx.connector.rar > Roles > Summary of Deployments > com.ofss.digx.connector.rar > Summary of Environment > Summary of Deployments > com.ofss.digx.app.connector > Summary of Deployments > com.ofss.digx.connector.rar

**Create a New Security Credential Mapping**

Back | Next | Finish | Cancel

**Outbound Connection Pool**

Which Outbound Connection Pool would you like the credential map to be associated with? Selecting Resource Adapter Default will configure the credential mapping for all Outbound Connection Pools in this resource adapter. Each Outbound Connection Pool can then configure themselves to override these credentials.

Customize this table

Create a New Security Credential Map Entry for:

Showing 1 to 10 of 11 Previous

<input type="checkbox"/>	Outbound Connection Pool
<input checked="" type="checkbox"/>	ra/DIGXConnectorAES
<input type="checkbox"/>	ra/DIGXConnectorAPNS
<input type="checkbox"/>	ra/DIGXConnectorBIREPORTS
<input type="checkbox"/>	ra/DIGXConnectorFCM
<input type="checkbox"/>	ra/DIGXConnectorFILEUPLOAD
<input type="checkbox"/>	ra/DIGXConnectorGENERICREST
<input type="checkbox"/>	ra/DIGXConnectorIPM_OBDX_BU
<input type="checkbox"/>	ra/DIGXConnectorIPM_OBDX_BU1
<input type="checkbox"/>	ra/DIGXConnectorJWTOKEN
<input type="checkbox"/>	ra/DIGXConnectorMERCHANT

Select "Default User" > Next

Home > Summary of Deployments > com.ofss.digx.connector.rar > Roles > Summary of Deployments > com.ofss.digx.connector.rar > Summary of Environment > Summary of Deployments > com.ofss.digx.app.connector > Summary of Deployments > com.ofss.digx.connector.rar

**Create a New Security Credential Mapping**

Back | Next | Finish | Cancel

**WebLogic Server User**

Select the WebLogic Server user that you would like to map an EIS user to. Selecting 'User for creating initial connections' will configure the user that will be used for creating connections when the resource adapter is first started. Selecting 'Default User' will configure the user that will be used as the default for any authenticated WebLogic Server user that does not have a credential mapping specifically for them. Selecting 'User for unauthenticated user' will configure the user that will be used for an unauthenticated WebLogic Server user. If you select 'Configured User' you must type in the WebLogic Server user that you are configuring. This user must be a configured WebLogic Server user.


User for creating initial connections  
 **Default User**  
 Unauthenticated WLS User  
 Configured User Name

WebLogic Server User Name:


Back | Next | Finish | Cancel

Enter "EIS User Name" should be set to AES\_KEY


Enter "EIS Password" . Password should be any 16 characters.

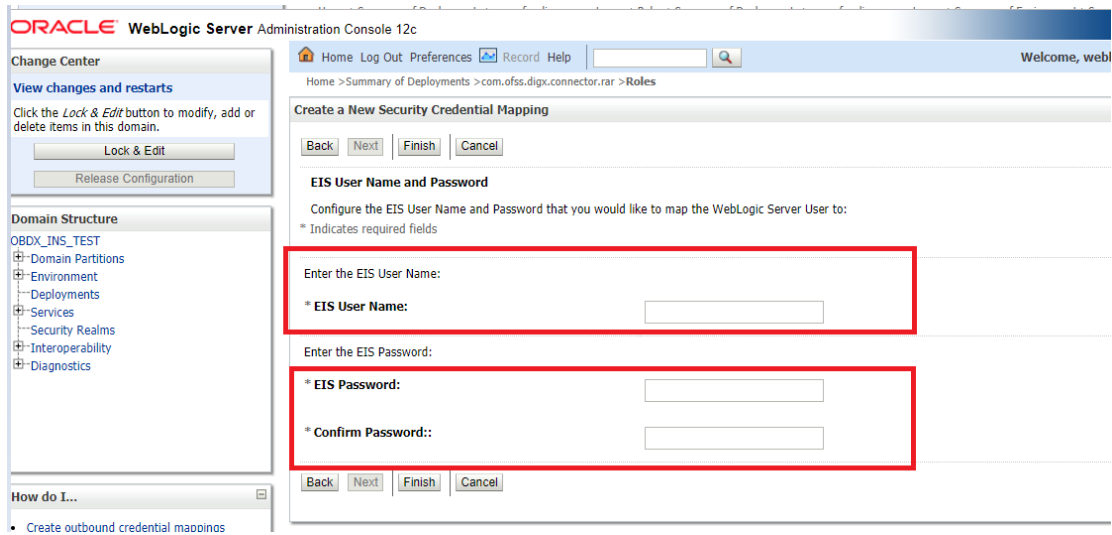

Click 'Finish'

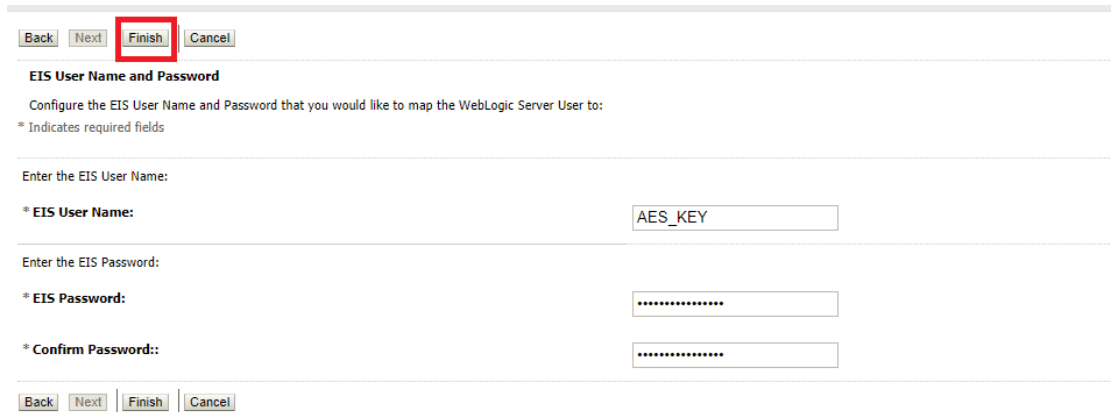

Check AES\_KEY mapping is created successfully.

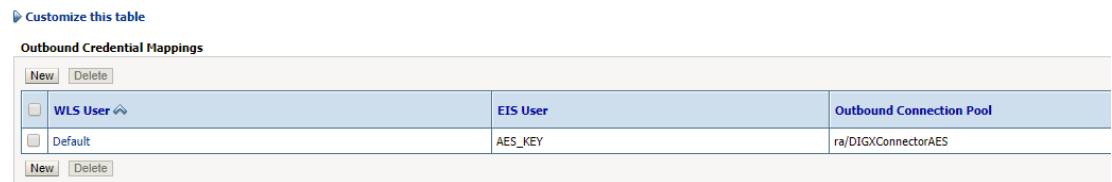

**Apply JRF Template**

To apply JRF template follow below steps.


- To do this, ensure that the Admin Server is running. Login to the EM (Enterprise Manager) Console using the following URL:

[http://<hostname>:<admin\\_port>/em](http://<hostname>:<admin_port>/em)

---

**Note:** EM console would be available on same hostname and port which was used for Weblogic Admin Console for OBDX domain (created via installer), just replace the “/console” with “/em”.

---

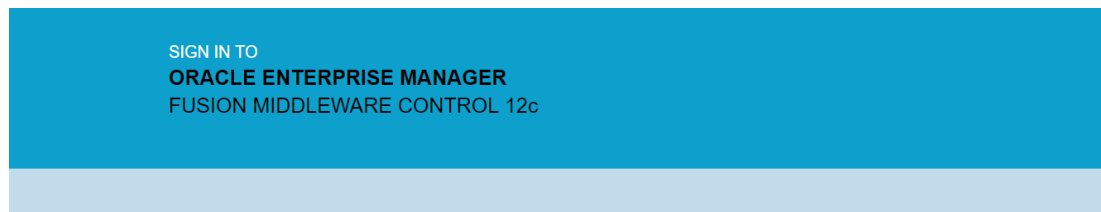

Domain Domain\_OBDX162\_UBS140

\* User Name

\* Password

Login to Partition

- Enter Weblogic administrator username and password (same used for Weblogic administrator console login)


Domain Domain\_OBDX\_INS\_TEST

\* User Name


\* Password

Login to Partition


- Click on Sign In

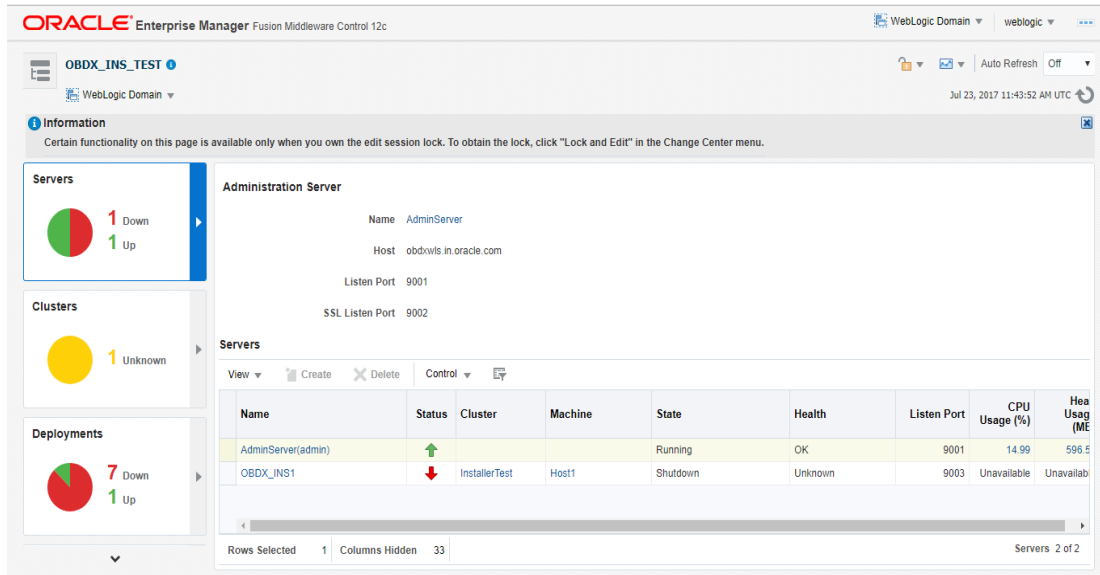


- Click on the Managed Server (as highlighted below)

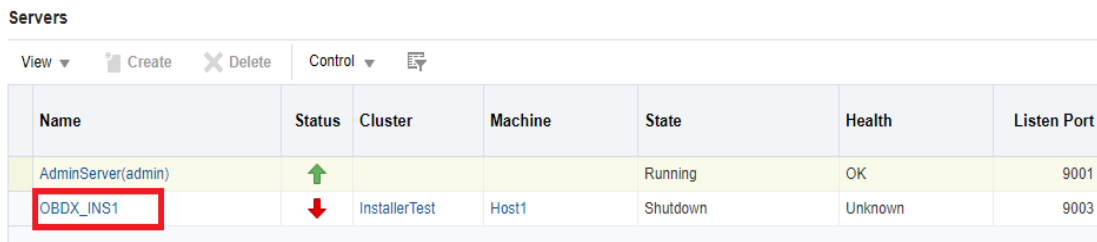

Note : Depending on installer.properties, Managed server will differ from above screenshot.

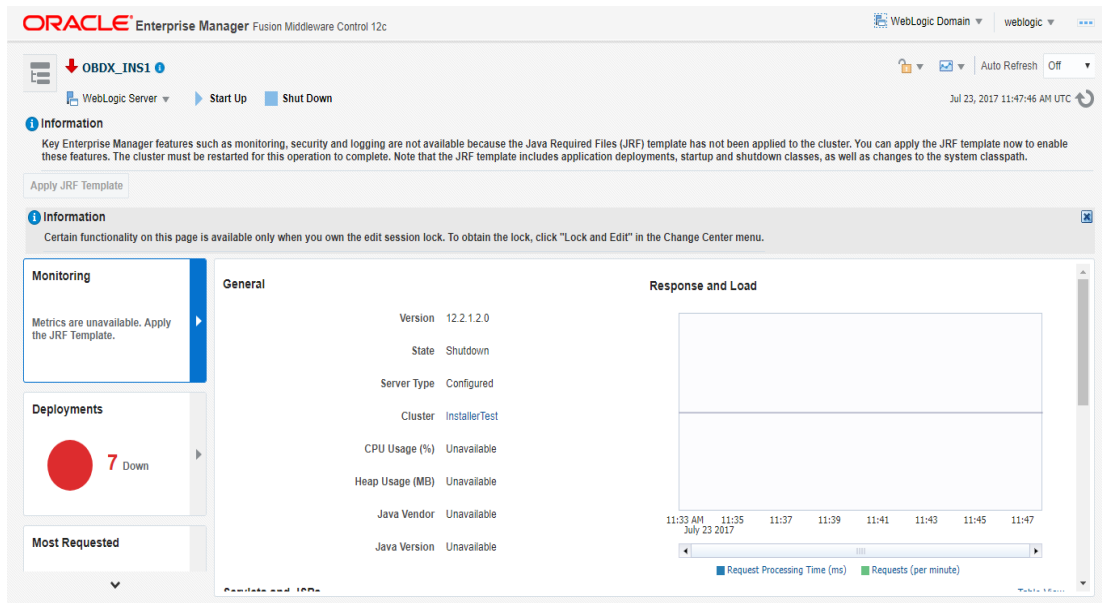


- Click on “Lock and Edit” option (as shown in screenshot).

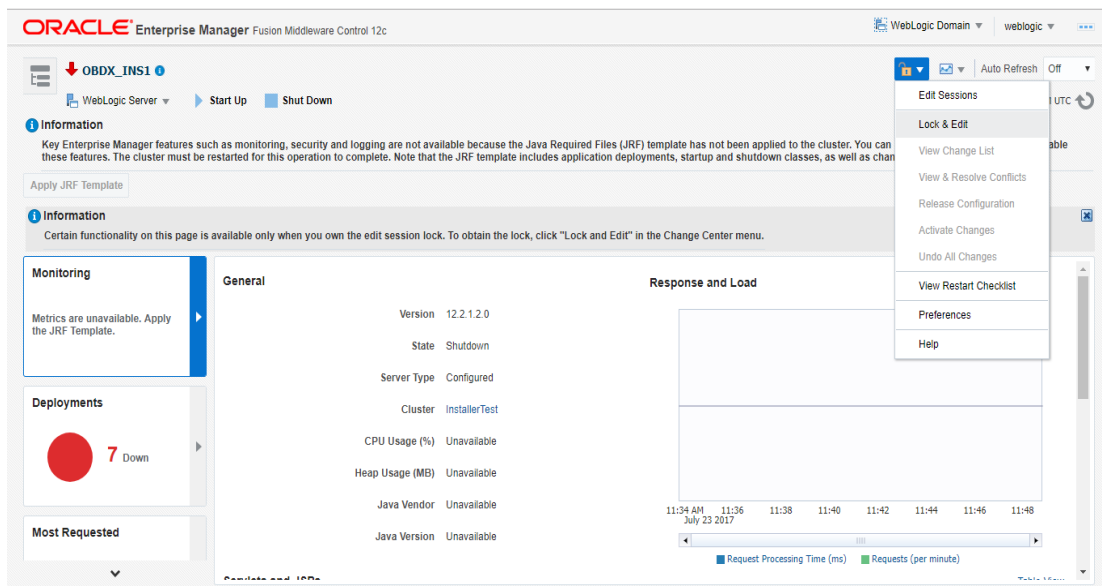


You will see below screen stating the edit session confirmation




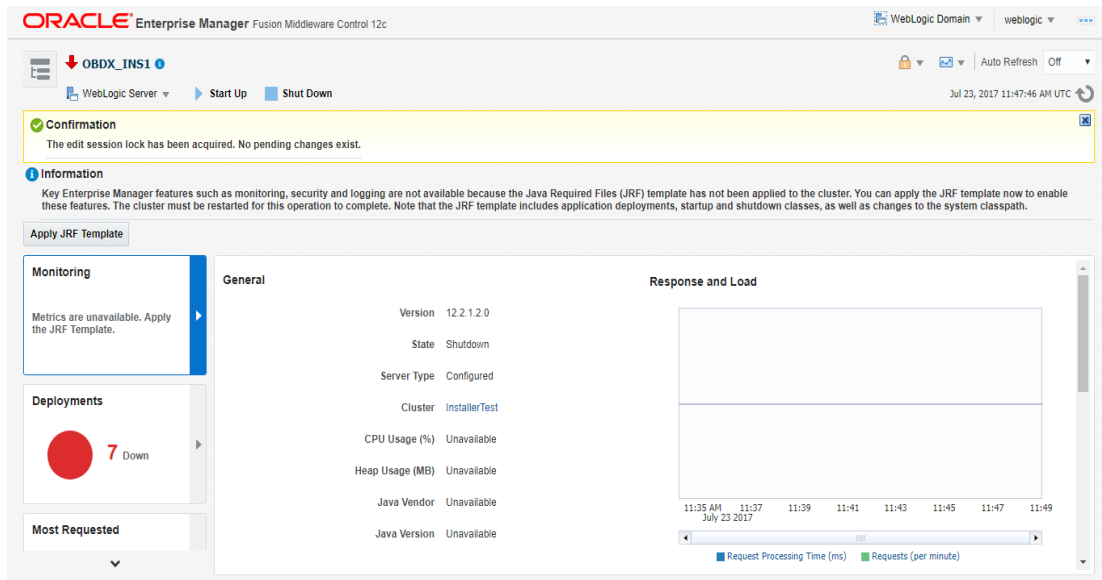


- Click on “Apply JRF Template” option (as shown in screenshot).

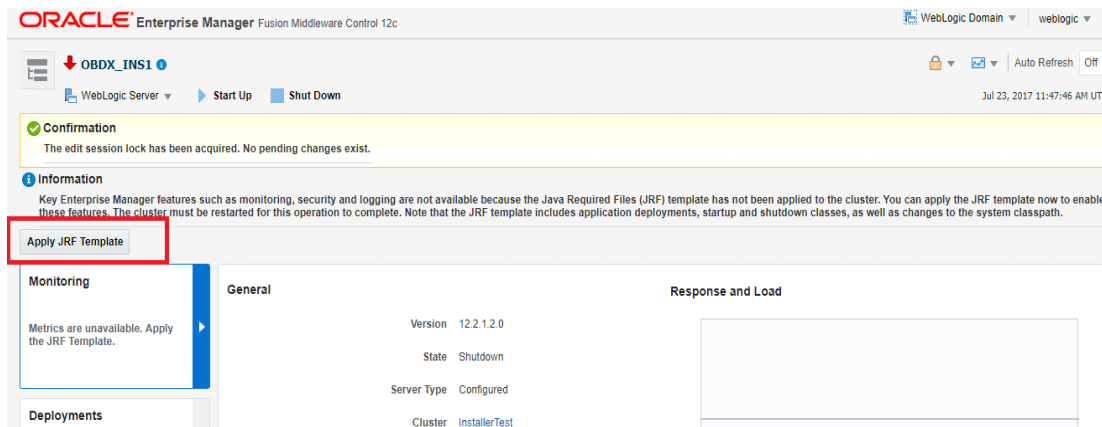


Is JRF successfully applied, you will get below Confirmation.

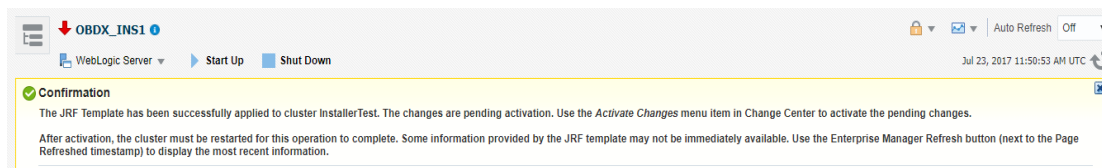

- Click on “Activates Changes” option (as shown in screenshot).

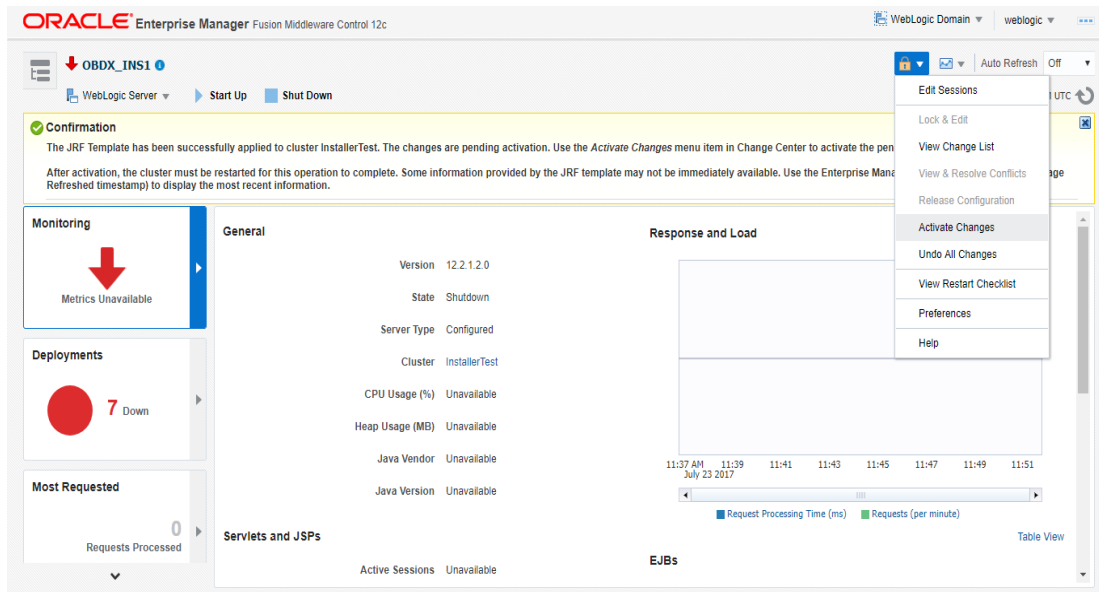

Post activation you will receive below Confirmation.

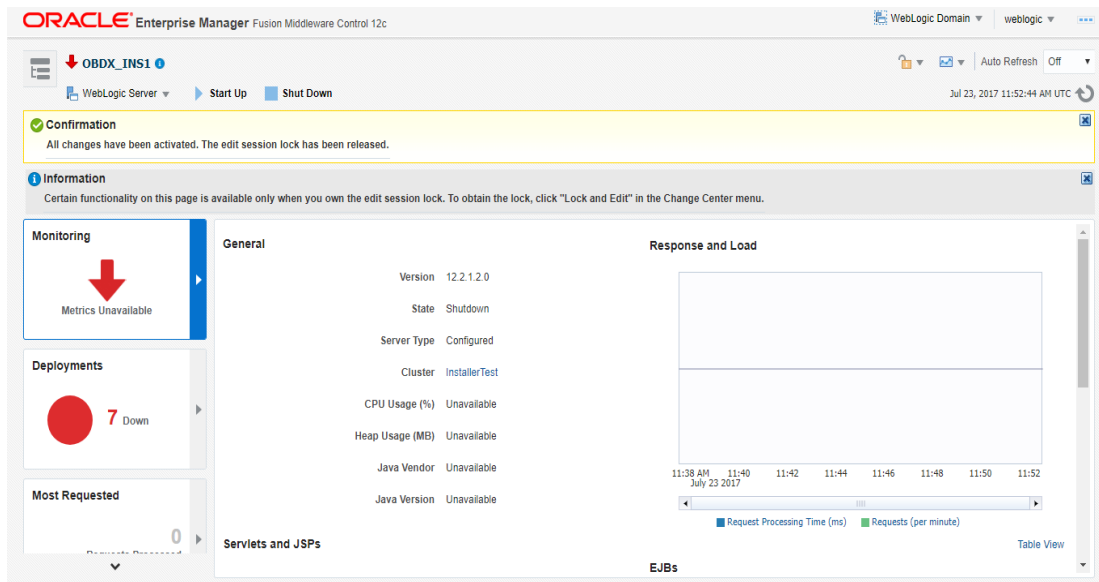

Configuring the Connector Credential Store

This step is required to setup the encryption key required for encryption of certain sensitive data within the OBDX application.

For more information, refer the **Oracle Banking Digital Experience Connector Credential Store Guide.pdf**

Functionality / Module	OutBound Connection Pool Name
VAM	ra/DIGXConnectorOBVAM

**Configure User Lockout attributes in Weblogic**

The User Lockout attributes in Weblogic under Home>Security Realms>myrealm need to be in sync with the Password Policy Maintained in LDAP or DBAuthenticator. In case of DBAuthenticator it has to be in sync with Password Policy Maintenance in OBDX.

Check for below values & change accordingly.

1] Lockout Threshold : It should be equal to Invalid attempts of Password Policy Maintenance.

2] Lockout Duration : It should be equal to property under prop\_id "USER\_LOCK\_PERIOD" maintained in DIGX\_FW\_CONFIG\_ALL\_B table.

In case of OUD or other LDAP it needs to be sync with the Password Policy configured in LDAP. For e.g.: Refer to below values configured in OUD.



Once the values are available, make appropriate change in respective highlighted configuration.

The screenshot shows the Oracle WebLogic Server Administration Console 12c interface. The main content area is titled 'Settings for myrealm' and has tabs for 'Configuration', 'Users and Groups', 'Roles and Policies', 'Credential Mappings', 'Providers', and 'Migration'. Under the 'Configuration' tab, there are sub-tabs for 'General', 'RDBMS Security Store', 'User Lockout', and 'Performance'. The 'User Lockout' sub-tab is active. A 'Lockout Enabled' checkbox is checked. Below it, there are four configuration items, each with a text input field and a 'More Info...' link:

- Lockout Threshold:** 5
- Lockout Duration:** 30
- Lockout Reset Duration:** 5
- Lockout Cache Size:** 5

The 'Lockout Threshold' and 'Lockout Duration' fields are highlighted with a red box. The left sidebar shows the 'Domain Structure' tree with 'OBDX\_INS\_TEST' selected. The bottom left shows 'How do I...' links for 'Set user lockout attributes' and 'Unlock user accounts'.

Save and Activate Changes

Restart AdminServer

### OBDX Application logging

To enable OBDX activation logging make below change to logging.xml present at `${domain.home}/config/fmwconfig/servers/${ManagedServer}`.

```
[devops@ ~]$ cd /home/devops/domain/OBDX182_UBS140/config/fmwconfig/servers/OBDX_UBS141/
[devops@ OBDX_UBS141]$ ls -ltr
total 36
drwxr-x--- 2 devops devops 4096 Jul  4 06:33 diagnostics-registration
drwxr-x--- 2 devops devops 4096 Jul  4 06:33 mbeans
-rw-r----- 1 devops devops 2286 Jul  4 06:33 dms_config.xml
drwxr-x--- 2 devops devops 4096 Jul  4 06:33 dfw
-rw-r----- 1 devops devops 1796 Jul  4 06:33 dfw_config.xml
-rw-r----- 1 devops devops 11250 Jul  4 06:33 logging.xml
-rw-r----- 1 devops devops 109 Jul  4 06:35 loggers.exclude
[devops@ OBDX_UBS141]$
```

Open logging.xml and make a new entry under `<log_handlers>` tag using below code template:

```
<log_handler name='obdx-handler' level='<LOGLEVEL>'
class='oracle.core.ojdl.logging.ODLHandlerFactory'>
  <property name='path' value='<path for OBDX log>/<OBDX log filename>' />
  <property name='maxFileSize' value='<The maximum size in bytes for each log file>' />
  <property name='maxLogSize' value='<The maximum size in bytes for the entire log>' />
  <property name='encoding' value='<encoding>' />
  <property name='useThreadName' value='true' />
  <property name='supplementalAttributes' value='<supplementalAttributes>' />
</log_handler>
```

Below is a sample implementation for log\_handlers file.

```

<log_handler name='obdx-handler' level='ERROR' class='oracle.core.ojdl.logging.ODLHandlerFactory'>
  <property name='path' value='${domain.home}/servers/${weblogic.Name}/logs/obdx.log' />
  <property name='maxFileSize' value='10485760' />
  <property name='maxLogSize' value='104857600' />
  <property name='encoding' value='UTF-8' />
  <property name='useThreadName' value='true' />
  <property name='supplementalAttributes'
    value='J2EE_APP.name,J2EE_MODULE.name,WEBSERVICE.name,WEBSERVICE_PORT.name,composite_instance_id,component_instance_id,composite_name,component_name' />
</log_handler>

```

```

@obdxwls:~/domain/OBDX_INS_TEST/config/fmwconfig/servers/OBDX_INS1
<?xml version='1.0' encoding='UTF-8'?>
<logging_configuration>
  <log_handlers>
    <log_handler name='ofss-handler' level='ERROR' class='oracle.core.ojdl.logging.ODLHandlerFactory'>
      <property name='path' value='${domain.home}/servers/${weblogic.Name}/logs/obdx.log' />
      <property name='maxFileSize' value='10485760' />
      <property name='maxLogSize' value='104857600' />
      <property name='encoding' value='UTF-8' />
      <property name='useThreadName' value='true' />
      <property name='supplementalAttributes' value='J2EE_APP.name,J2EE_MODULE.name,WEBSERVICE.name,WEBSERVICE_PORT.name,composite_instance_id,component_instance_id,composite_name,component_name' />
    </log_handler>
    <log_handler name='console-handler' class='oracle.core.ojdl.logging.ConsoleHandler' level='WARNING:32' formatter='oracle.core.ojdl.weblogic.ConsoleFormatter' />
    <log_handler name='odl-handler' class='oracle.core.ojdl.logging.ODLHandlerFactory' filter='oracle.dfw.incident.IncidentDetectionLogFilter'>
      <property name='path' value='${domain.home}/servers/${weblogic.Name}/logs/${weblogic.Name}-diagnostic.log' />
      <property name='maxFileSize' value='10485760' />
      <property name='maxLogSize' value='104857600' />
      <property name='encoding' value='UTF-8' />
      <property name='useThreadName' value='true' />
      <property name='supplementalAttributes' value='DSID,J2EE_APP.name,J2EE_MODULE.name,WEBSERVICE.name,WEBSERVICE_PORT.name,oracle.soa.tracking.FlowId,oracle.soa.tracking.InstanceId,oracle.soa.tracking.SCAEntityId,oracle.soa.tracking.FaultId,oracle.soa.tracking.RetryCount,composite_name' />
    </log_handler>
    <log_handler name='wls-domain' class='oracle.core.ojdl.weblogic.DomainLogHandler' level='WARNING' />
    <log_handler name='owsm-message-handler' class='oracle.core.ojdl.logging.ODLHandlerFactory'>
      <property name='path' value='${domain.home}/servers/${weblogic.Name}/logs/owsm/msglogging/diagnostic.log' />

```

Add loggers under <loggers> tag using below template:

```

<logger name='com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='obdx-handler' />
</logger>
<logger name='#BANKCODE#.com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='obdx-handler' />
</logger>

```

---

Note: Replace the #BANKCODE# with bank code.

---

Below is a sample implementation for loggers file

```

<logger name='com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='obdx-handler' />
</logger>
<logger name='000.com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='obdx-handler' />
</logger>

```

```

@obdxwls:~/domain/OBDX_INS_TEST/config/fmwconfig/servers/OBDX_INS1
</log_handler>
</log_handlers>
<!--
<logger name='com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='ofss-handler' />
</logger>
<logger name='000.com.ofss' level='ERROR' useParentHandlers='false'>
  <handler name='ofss-handler' />
</logger>
<!--
<logger name='' level='WARNING:1' useParentHandlers='true'>
  <handler name='odl-handler' />
  <handler name='wls-domain' />
  <handler name='console-handler' />
</logger>
<!--
<logger name='oracle' level='NOTIFICATION:1' useParentHandlers='true' />
<logger name='oracle.adf' useParentHandlers='true' />
<logger name='oracle.adf.desktopintegration' useParentHandlers='true' />
<logger name='oracle.adf.faces' useParentHandlers='true' />
<logger name='oracle.adf.controller' useParentHandlers='true' />
<logger name='oracle.adf.internal' useParentHandlers='true' />
<logger name='oracle.adf.internal.controller' useParentHandlers='true' />
<logger name='oracle.jbo' useParentHandlers='true' />
<logger name='oracle.adfdes' useParentHandlers='true' />
<logger name='oracle.adfdesinternal' useParentHandlers='true' />
<logger name='oracle.wsm' useParentHandlers='true' />
<logger name='oracle.wsm.msg.logging' level='NOTIFICATION:1' useParentHandlers='false'>

```

## Eclipselink logging

To modify eclipselink logging make changes in <INSTALLATION\_HOME>\config\META-INF\persistence.xml using below link :

<https://wiki.eclipse.org/EclipseLink/Examples/JPA/Logging>

```

@obdxwls:~/obdx/config/META-INF
[
  META-INF]$
[
  META-INF]$ pwd
/home/devops/obdx/config/META-INF

```

```

@obdxwls:~/obdx/config/META-INF
[
  META-INF]$ cat persistence.xml
<?xml version='1.0' encoding='UTF-8' standalone='no'?>
<persistence xmlns='http://java.sun.com/xml/ns/persistence' xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance' version='2.0' xsi:schemaLocation='http://java.sun.com/xml/ns/persistence http://java.sun.com/xml/ns/persistence/persistence_2_0.xsd'>
  <persistence-unit name='DIGX' transaction-type='JTA'>
    <jta-data-source>DIGX/jta-data-source</jta-data-source>
    <mapping-file>META-INF/generic-mapping.orm.xml</mapping-file>
    <properties>
      <property name='eclipselink.logging.level' value='WARNING' />
      <property name='eclipselink.logging.file' value='jpa-eclipselink.log' />
      <property name='eclipselink.jdbc.connector' value='com.ofss.fc.infra.das.orm.eclipselink.EclipseLinkConnector' />
      <property name='eclipselink.target-server' value='WebLogic' />
      <property name='eclipselink.session.customizer' value='com.ofss.digx.infra.das.orm.eclipselink.EclipseLinkSessionCustomizer' />
    </properties>
  </persistence-unit>
  <persistence-unit name='BATCH' transaction-type='RESOURCE_LOCAL'>
    <mapping-file>META-INF/generic-mapping.orm.xml</mapping-file>
    <properties>
      <property name='eclipselink.logging.level' value='WARNING' />
      <property name='eclipselink.logging.file' value='jpa-eclipselink-batch.log' />
      <property name='eclipselink.jdbc.connector' value='com.ofss.fc.infra.das.orm.eclipselink.EclipseLinkConnector' />
      <property name='eclipselink.target-server' value='WebLogic' />
      <property name='eclipselink.session.customizer' value='com.ofss.digx.infra.das.orm.eclipselink.EclipseLinkSessionCustomizer' />
    </properties>
  </persistence-unit>
  <persistence-unit name='NONXA' transaction-type='RESOURCE_LOCAL'>
    <non-jta-data-source>NONXA/non-jta-data-source</non-jta-data-source>
    <mapping-file>META-INF/generic-mapping.orm.xml</mapping-file>
    <properties>
      <property name='eclipselink.logging.level' value='WARNING' />
      <property name='eclipselink.logging.file' value='jpa-eclipselink-nonxa.log' />
      <property name='eclipselink.jdbc.connector' value='com.ofss.fc.infra.das.orm.eclipselink.EclipseLinkConnector' />
      <property name='eclipselink.target-server' value='WebLogic' />
      <property name='eclipselink.session.customizer' value='com.ofss.digx.infra.das.orm.eclipselink.EclipseLinkSessionCustomizer' />
    </properties>
  </persistence-unit>
</persistence.xml
[
  META-INF]$

```

## Change logging level during runtime

To change OBDX application logging level at runtime (when OBDX application is up and running) do following steps.


To do this, ensure that the Admin Server is running. Login to the EM (Enterprise Manager) Console using the following URL:

[http://<hostname>:<admin\\_port>/em](http://<hostname>:<admin_port>/em)

---

**Note:** EM console would be available on same hostname and port which was used for Weblogic Admin Console for OBDX domain (created via installer), just replace the “/console” with “/em”.

---

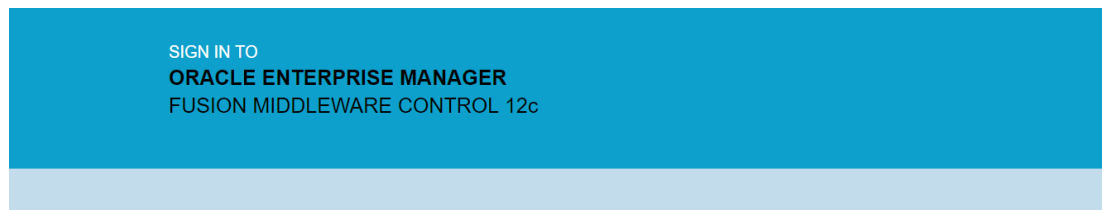

Domain Domain\_OBDX182\_UBS140

\* User Name

\* Password


Login to Partition

- Click on obdx-server


---

**Note :** Depending on installer.properties, Managed server will differ from above screenshot.

---

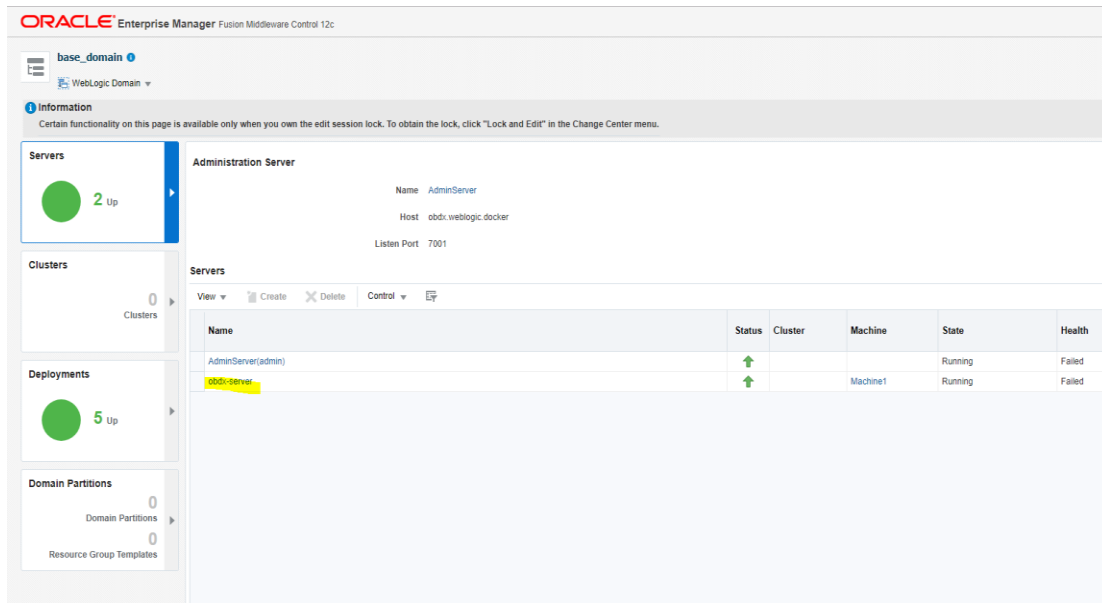

- In Weblogic Domain menu click on Logs -> Logs Configurations

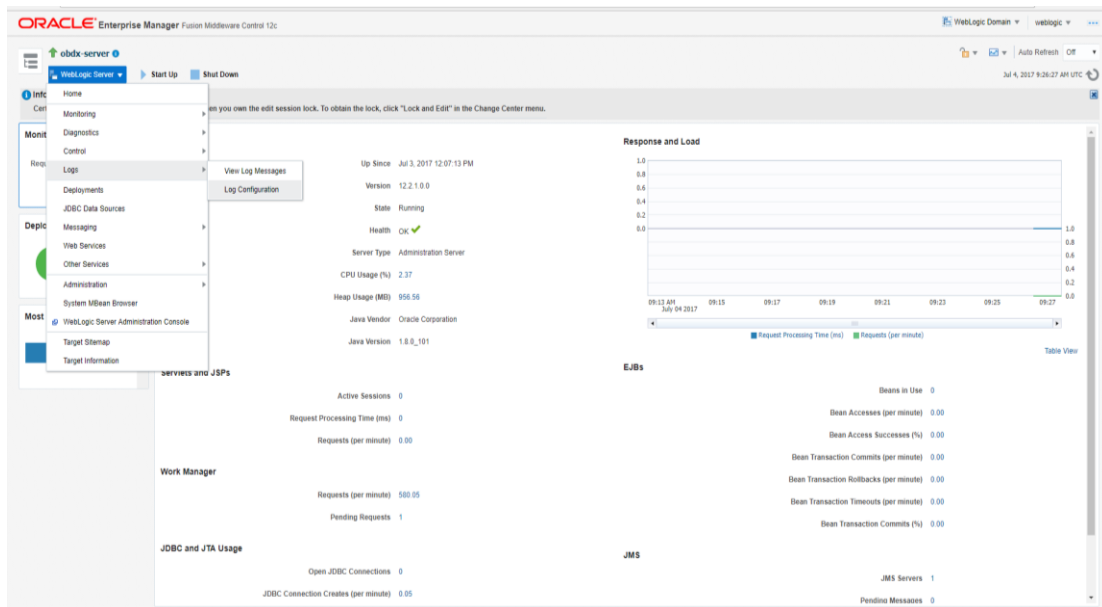



- Select the logger and change the logging level and then click on apply.

The screenshot shows the Oracle Enterprise Manager interface for configuring loggers. The 'Runtime Loggers' section is expanded, showing a list of loggers. The '08.com.ofss' logger is selected, and its logging level is set to 'ERROR:1 (SEVERE)'. The table below summarizes the visible loggers.

Logger Name	Oracle Diagnostic Logging Level (Java Level)	Log File	Persistent Log Level State
Root Logger	ERROR:1 (SEVERE)	ofss-handler	ERROR:1
000	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
08	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
08.com.ofss	ERROR:1 (SEVERE)	ofss-handler	ERROR:1
ExampleApplication:Encoder	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
LifeCycle	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
Security	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
ServiceLoader	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
com	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
global	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
io	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
javax	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
jersey	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
jmx:fmv	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	
oracle	NOTIFICATION:1 (INFO)	ofss-handler	NOTIFICATION:1
org	ERROR:1 (SEVERE) [Inherited f]	ofss-handler	

---

**Note : Logger name should be defined in logging.xml.**

---

## Oracle FLEXCUBE Universal Banking (OBDX with UBS)

If during installer execution Oracle FLEXCUBE Universal Banking (OBDX with UBS) is selected, then below steps needs to be done manually.

### Foreign Server

- Login into Weblogic Admin console (OBDX domain created using installer) and Browse to Summary of JMS Modules > UBSSystemModule (as shown below)

Summary of JMS Modules

JMS system resources are configured and stored as modules similar to standard Java EE modules. Such resources include queues, topics, connection factories, templates, destination keys, quota, distribu configure and manage JMS system modules as global system resources.

This page summarizes the JMS system modules that have been created for this domain.

[Customize this table](#)

**JMS Modules (Filtered - More Columns Exist)**

Click the **Lock & Edit** button in the Change Center to activate all the buttons on this page.

Name	Type
AuditJMS	JMSSystemResource
FileUploadJMS	JMSSystemResource
ReportsJMSModule	JMSSystemResource
UBSSystemModule	JMSSystemResource

Settings for UBSSystemModule

**Configuration** | Subdeployments | Targets | Security | Notes

This page displays general information about a JMS system module and its resources. It also allows you to configure new resources and access existing resources.

**Name:** UBSSystemModule The name of this JMS system module. [More Info...](#)

**Scope:** Global Specifies if the JMS system module is accessible within the domain, a partition, or a resource group template.

**Descriptor File Name:** jms/ubssystemmodule-jms.xml The name of the JMS module descriptor file. [More Info...](#)

This page summarizes the JMS resources that have been created for this JMS system module, including queue and topic destinations, connection factories, JMS templates, destination sort keys, destination quota, distributed destinations, foreign servers, and store-and-forward parameters.

[Customize this table](#)

**Summary of Resources**

Click the **Lock & Edit** button in the Change Center to activate all the buttons on this page.

Name	Type	JNDI Name	Subdeployment	Targets
UBSForeignServer	Foreign Server	N/A	UBSSubdeployment	obdx_cluster

- Click on UBSForeignServer

Settings for UBSForeignServer

Configuration Subdeployment Notes

General Destinations Connection Factories

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

A foreign server represents a JNDI provider that resides outside a WebLogic Server. It contains information that allows WebLogic Server to reach the remote JNDI provider. This way, a number of foreign server.

**Name:** UBSForeignServer

**JNDI Initial Context Factory:** weblogic.jndi.WLInitialConte:

**JNDI Connection URL:** t3://<EHMS\_WLS\_SERVER>:<EHMS\_WLS\_SERVER\_PORT>/

**JNDI Properties Credential:**

**Confirm JNDI Properties Credential:**

**JNDI Properties:**

```
java.naming.security.principal=
<EHMS_WLS_USERNAME>
```

- Click on Lock & Edit

Settings for UBSForeignServer

Configuration Subdeployment Notes

General Destinations Connection Factories

Save

A foreign server represents a JNDI provider that resides outside a WebLogic Server. It contains information that allows WebLogic Server to reach the remote JNDI provider. This way, a number of foreign server.

**Name:** UBSForeignServer

**JNDI Initial Context Factory:** weblogic.jndi.WLInitialConte:

**JNDI Connection URL:** t3://<EHMS\_WLS\_SERVER>:<EHMS\_WLS\_SERVER\_PORT>/

**JNDI Properties Credential:**

**Confirm JNDI Properties Credential:**

**JNDI Properties:**

```
java.naming.security.principal=
<EHMS_WLS_USERNAME>
```

Set below configurations with:

**JNDI Connection URL** – Replace <EHMS\_WLS\_SERVER> with hostname or IP address of UBS HOST Weblogic server and <EHMS\_WLS\_SERVER\_PORT> with port number of UBS HOST Weblogic Managed server (where NOTIFY\_DEST\_QUEUE and NOTIFY\_DEST\_QUEUE\_FCDB are mapped).  
**JNDI Properties Credential** – Password for username set in JNDI properties

**Confirm JNDI Properties Credential** – Confirm password for username set in JNDI properties

**JNDI Properties** – Value to be set as “java.naming.security.principal=<EHMS\_WLS\_USERNAME>”, where username is the login user of UBS Weblogic Admin Console (user which created the primary local queues for UBS).

- Click on Save

Settings for UBSForeignServer

Configuration Subdeployment Notes

General Destinations Connection Factories

Save

A foreign server represents a JNDI provider that resides outside a WebLogic Server. It contains information that allows WebLogic Server to reach the remote JNDI provider. This way, a number of connection factory and destination objects (queues or topics) can be defined on one JNDI foreign server.

Name: UBSForeignServer The name of this foreign server. More Info...

JNDI Initial Context Factory: weblogic.jndi.WLInitialConte The name of the class that must be instantiated to access the JNDI provider. This cla the vendor that are being used. More Info...

JNDI Connection URL: t3://10.184.135.59:7860/ The URL that WebLogic Server will use to contact the JNDI provider. The syntax of th being used. For WebLogic JMS, leave this field blank if you are referencing WebLogic Info...

JNDI Properties Credential: ..... Any Credentials that must be set for the JNDI provider. These Credentials will be part the constructor for the JNDI provider's InitialContext class. Note: For secure credenti the Properties field results in the credential being stored and displayed as originall e

Confirm JNDI Properties Credential: .....

JNDI Properties: java.naming.security.principal=infra Any additional properties that must be set for the JNDI provider. These properties will JNDI provider's InitialContext class. More Info...

Default Targeting Enabled Specifies whether this JMS resource defaults to the parent module's targeting or uses mechanism. More Info...

Save

Home > Summary of JMS Modules > UBSSystemModule > Summary of JMS Modules > UBSSystemModule > Summary of JMS Modules > UBSSystemModule > UBSForeignServer > Configuration > NOTIFY\_DEST\_QUEUE\_FCDB > UBSForeignServer

Messages

Settings updated successfully.

Settings for UBSForeignServer

Configuration Subdeployment Notes

General Destinations Connection Factories

Save

A foreign server represents a JNDI provider that resides outside a WebLogic Server. It contains information that allows WebLogic Server to reach the remote JNDI provider. This way, a number of connection factory and destination objects (queues or topics) can be defin foreign server.

Name: UBSForeignServer The name of this foreign server. More Info...

JNDI Initial Context Factory: weblogic.jndi.WLInitialConte The name of the class that must be instantiated to access the JNDI pr the vendor that are being used. More Info...

JNDI Connection URL: t3://10.184.135.59:7860/ The URL that WebLogic Server will use to contact the JNDI provider. T being used. For WebLogic JMS, leave this field blank if you are referen Info...

JNDI Properties Credential: ..... Any Credentials that must be set for the JNDI provider. These Creden the constructor for the JNDI provider's InitialContext class. Note: For s the Properties field results in the credential being stored and displaye



Confirm JNDI Properties Credential: .....

JNDI Properties: java.naming.security.principal=infra Any additional properties that must be set for the JNDI provider. These JNDI provider's InitialContext class. More Info...

Default Targeting Enabled Specifies whether this JMS resource defaults to the parent module's ta mechanism. More Info...

Save

- Click on Activate Changes

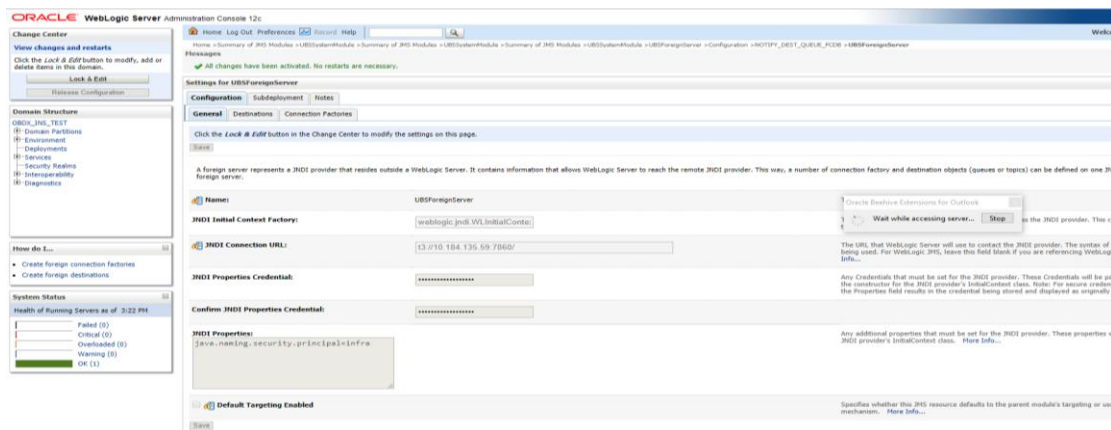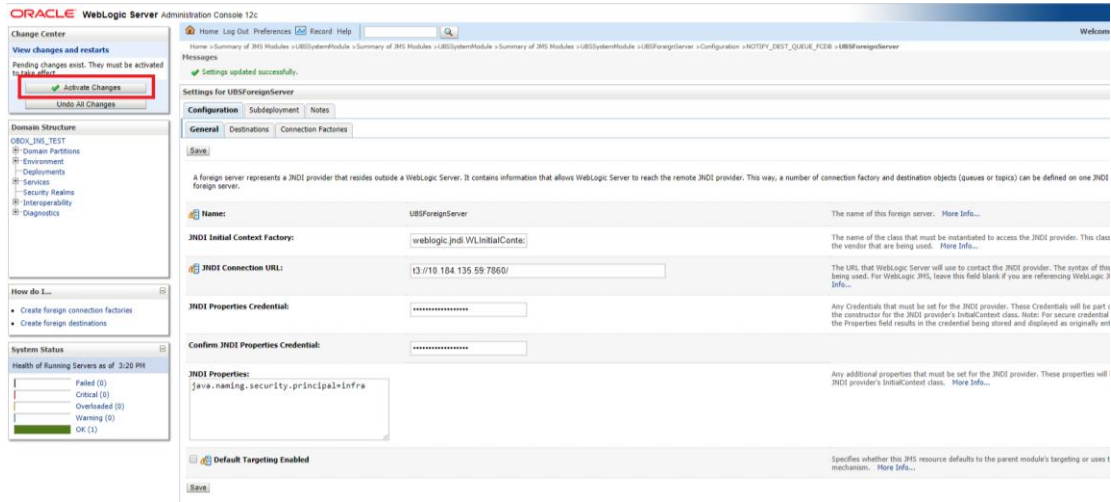

## Deployment of notification MDB application

Before deployment of obdx.externalsystem.ubs.notification.mdb.ear application, kindly perform below steps:

- Open the obdx.externalsystem.ubs.notification.mdb.ear (EAR file is available <OBDX INSTALLER DIR>/installables/app/components/ubs/deploy/obdx.externalsystem.ubs.notification.mdb.ear) using any archiving tools (i.e.: 7-zip)

Name	Size	Packed Size	Modified	Created	Accessed	Attributes	Encrypted	Comment
[APP-INF]	3 783 283	3 350 626	2017-05-19 11:57			D d-rw-r-xr-x	-	
[META-INF]	1 660	862	2017-07-21 11:29			D d-rw-r-xr-x	-	
com.ofss.extsystem.ubs.notification.jar	481 333	398 219	2017-07-21 11:29			-rw-r--r--	-	

- Double click on com.ofss.extsystem.ubs.notification.jar

Name	Size	Packed Size	Modified	Created	Accessed	Attributes	Encrypted	Comment
[com]	1 193 325	381 587	2017-07-21 11:27			D d-rw-r-xr-x	-	
[META-INF]	4 543	1 808	2017-07-21 11:27			D d-rw-r-xr-x	-	
wsconfig.properties	1 420	288	2017-07-21 11:27			-rw-r--r--	-	

- Open the wsconfig.properties to edit

Name	Size	Packed Size	Modified	Created	Accessed
[com]	1 193 325	381 587	2017-07-21 11:27		
[META-INF]	4 543	1 808	2017-07-21 11:27		
wsconfig.properties	1 420	288	2017-07-21 11:27		

Open	Enter
Open Inside	Ctrl+PgDn
Open Outside	Shift+Enter
View	F3
<b>Edit</b>	<b>F4</b>
Rename	F2
Copy To...	F5
Move To...	F6
Delete	Del

```
wsconfig.properties - Notepad
File Edit Format View Help
AlertProcessorService.service.AlertProcessorService
AlertProcessorService namespace:http://host.service.alerts.appx.digx.ofss.com/
AlertProcessorService uri:http://<OBDX_WLS_HOSTNAME>:<OBDX_WLS_MS_PORT>/obdx/AlertProcessorService?wsdl
AlertProcessorService.stubClass:com.ofss.digx.alerts.service.host.AlertProcessorService
AlertProcessorService.endpointName:AlertProcessorPort
AlertProcessorService.stubService:com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.proxyClassName:com.ofss.digx.appx.alerts.service.host.AlertProcessor
AlertProcessorService.targetUnit:<ENTITY_ID>
FileProcessedNotificationProcessorService.service.FileProcessedNotificationProcessorService
FileProcessedNotificationProcessorService namespace:http://host.service.fileupload.appx.digx.ofss.com/
FileProcessedNotificationProcessorService uri:http://<OBDX_WLS_HOSTNAME>:<OBDX_WLS_MS_PORT>/obdx/FileProcessedNotificationProcessorService?wsdl
FileProcessedNotificationProcessorService.stubClass:com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessorService
FileProcessedNotificationProcessorService.endpointName:FileProcessedNotificationProcessorPort
FileProcessedNotificationProcessorService.stubService:com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessorService
FileProcessedNotificationProcessorService.proxyClassName:com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessor
FileProcessedNotificationProcessorService.timeOut:1200000
```

- Change the URL for AlertProcessorService.url,FileProcessedNotifProcessorService.url and AlertProcessorService.targetUnit(Note the hostname and port should be of OBDX managed server created by installer. Entity ID should be OBDX\_BU for Base entity)

```
wsconfig.properties - Notepad
File Edit Format View Help
AlertProcessorService.service.AlertProcessorService
AlertProcessorService.namespace.http://host.service.alerts.appx.digx.ofss.com/
AlertProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/AlertProcessorService?wsdl
AlertProcessorService.stubClass.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.endpointName.AlertProcessorPort
AlertProcessorService.stubService.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.proxyClassName.com.ofss.digx.appx.alerts.service.host.HostAlertProcessor
AlertProcessorService.timeOut:1200000
AlertProcessorService.targetUnit.OBDX_BU
FileProcessedNotifProcessorService.service.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.namespace.http://host.service.fileupload.appx.digx.ofss.com/
FileProcessedNotifProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/FileProcessedNotifProcessorService?wsdl
FileProcessedNotifProcessorService.stubClass.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.endpointName.FileProcessedNotificationProcessorPort
FileProcessedNotifProcessorService.stubService.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.proxyClassName.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessor
FileProcessedNotifProcessorService.timeOut:1200000
```


```
wsconfig.properties - Notepad
File Edit Format View Help
AlertProcessorService.service.AlertProcessorService
AlertProcessorService.namespace.http://host.service.alerts.appx.digx.ofss.com/
AlertProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/AlertProcessorService?wsdl
AlertProcessorService.stubClass.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.endpointName.AlertProcessorPort
AlertProcessorService.stubService.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.proxyClassName.com.ofss.digx.appx.alerts.service.host.HostAlertProcessor
AlertProcessorService.timeOut:1200000
AlertProcessorService.targetUnit.OBDX_BU
FileProcessedNotifProcessorService.service.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.namespace.http://host.service.fileupload.appx.digx.ofss.com/
FileProcessedNotifProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/FileProcessedNotifProcessorService?wsdl
FileProcessedNotifProcessorService.stubClass.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.endpointName.FileProcessedNotificationProcessorPort
FileProcessedNotifProcessorService.stubService.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.proxyClassName.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessor
FileProcessedNotifProcessorService.timeOut:1200000
```

```
wsconfig.properties - Notepad
File Edit Format View Help
AlertProcessorService.service.AlertProcessorService
AlertProcessorService.namespace.http://host.service.alerts.appx.digx.ofss.com/
AlertProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/AlertProcessorService?wsdl
AlertProcessorService.stubClass.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.endpointName.AlertProcessorPort
AlertProcessorService.stubService.com.ofss.digx.appx.alerts.service.host.AlertProcessorService
AlertProcessorService.proxyClassName.com.ofss.digx.appx.alerts.service.host.HostAlertProcessor
AlertProcessorService.timeOut:1200000
AlertProcessorService.targetUnit.OBDX_BU
FileProcessedNotifProcessorService.service.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.namespace.http://host.service.fileupload.appx.digx.ofss.com/
FileProcessedNotifProcessorService.url.http://mumaa012.in.oracle.com:27003/obdx/FileProcessedNotifProcessorService?wsdl
FileProcessedNotifProcessorService.stubClass.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.endpointName.FileProcessedNotificationProcessorPort
FileProcessedNotifProcessorService.stubService.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotifProcessorService
FileProcessedNotifProcessorService.proxyClassName.com.ofss.digx.appx.fileupload.service.host.FileProcessedNotificationProcessor
FileProcessedNotifProcessorService.timeOut:1200000
```



- Save changes.
- Click OK.

Name	Size	Packed Size	Modified	Created	Accessed	Attributes	Encrypted	Comment
com	1 193 325	381 587	2017-07-21 11:27			D drwxr-xr-x	-	
META-INF	4 543	1 808	2017-07-21 11:27			D drwxr-xr-x	-	
wsconfig.properties	1 420	288	2017-07-21 11:27			-rw-r--r--	-	


- Navigate back to obdx.externalsystem.ubs.notification.mdb.ear

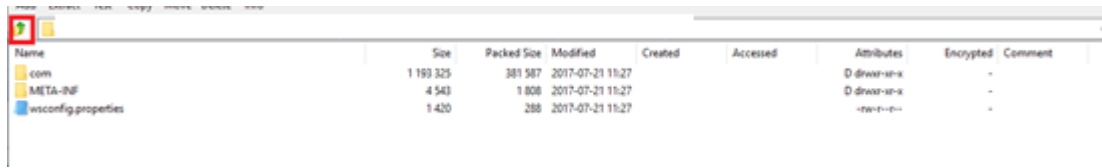

- Click OK

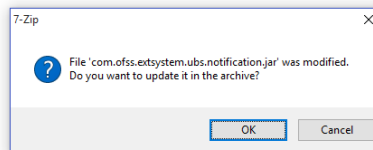

The date-timestamp would be updated (as seen below) once the change is saved.

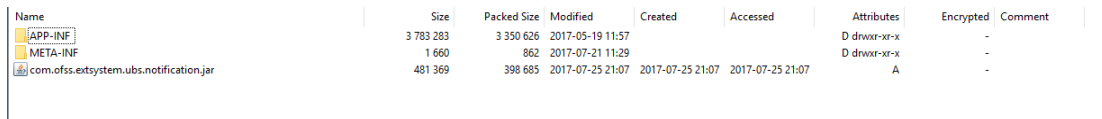

Deploy the updated obdx.externalsystem.ubs.notification.mdb.ear using below steps.

- Login into Weblogic Admin Console (OBDX domain created using installer) and navigate to Deployments



**ORACLE WebLogic Server Administration Console 12c**

Home | Log Out | Preferences | Recent | Help

Welcome, weblogic | Connected to: OROUX\_INS\_TEST

Summary of Deployments

Configuration | Control | Monitoring

This page displays the list of Java EE applications and standalone application modules installed to this domain.

You can update (redeploy) or delete installed applications and modules from the domain by selecting the checkbox next to the application name and then using the controls on this page.

To install a new application or module for deployment to targets in this domain, click **Install**.

Customize this table

Name	State	Health	Type	Targets	Scope	Domain Partitions	Deployment Order
af.oracle.businessesoft(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
af.oracle.domain(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
af.oracle.domain.webapp(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
my.AuditMOBEAR	New		Enterprise Application	InstallerTest	Global		100
my.BatchResourceAdapter	New		Enterprise Application	InstallerTest	Global		100
coherence-transaction-rar	Active	OK	Resource Adapter	AdminServer	Global		100
my.com.afdc.dps.app.connector	New		Enterprise Application	InstallerTest	Global		100
my.com.afdc.dps.app.service.rest	New		Enterprise Application	InstallerTest	Global		100
my.com.afdc.dps.app.service.smap	New		Enterprise Application	InstallerTest	Global		100
my.DMS Application (12.2.1.1.0)	Active	OK	Web Application	AdminServer	Global		5

Showing 1 to 10 of 69 | Previous | Next

Health of Running Servers as of 3:42 PM

- Failed (0)
- Critical (0)
- Overloaded (0)
- Warning (0)
- OK (1)

WebLogic Server Version: 12.2.1.2.2  
Copyright (c) 1996-2015, Oracle and/or its affiliates. All rights reserved.  
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

- Click Lock & Edit

**ORACLE WebLogic Server Administration Console 12c**

Home | Log Out | Preferences | Recent | Help

Welcome, weblogic | Connected to: OROUX\_INS\_T

Summary of Deployments

Configuration | Control | Monitoring

This page displays the list of Java EE applications and standalone application modules installed to this domain.

You can update (redeploy) or delete installed applications and modules from the domain by selecting the checkbox next to the application name and then using the controls on this page.

To install a new application or module for deployment to targets in this domain, click **Install**.

Customize this table


Name	State	Health	Type	Targets	Scope	Domain Partitions	Deployment Order
af.oracle.businessesoft(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
af.oracle.domain(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
af.oracle.domain.webapp(1.0.12.2.1.1.0)	Active		Library	AdminServer	Global		100
my.AuditMOBEAR	New		Enterprise Application	InstallerTest	Global		100
my.BatchResourceAdapter	New		Enterprise Application	InstallerTest	Global		100
coherence-transaction-rar	Active	OK	Resource Adapter	AdminServer	Global		100
my.com.afdc.dps.app.connector	New		Enterprise Application	InstallerTest	Global		100
my.com.afdc.dps.app.service.rest	New		Enterprise Application	InstallerTest	Global		100
my.com.afdc.dps.app.service.smap	New		Enterprise Application	InstallerTest	Global		100
my.DMS Application (12.2.1.1.0)	Active	OK	Web Application	AdminServer	Global		5

Showing 1 to 10 of 69 | Previous | Next


Health of Running Servers as of 3:42 PM

- Failed (0)
- Critical (0)
- Overloaded (0)


- Click on Install

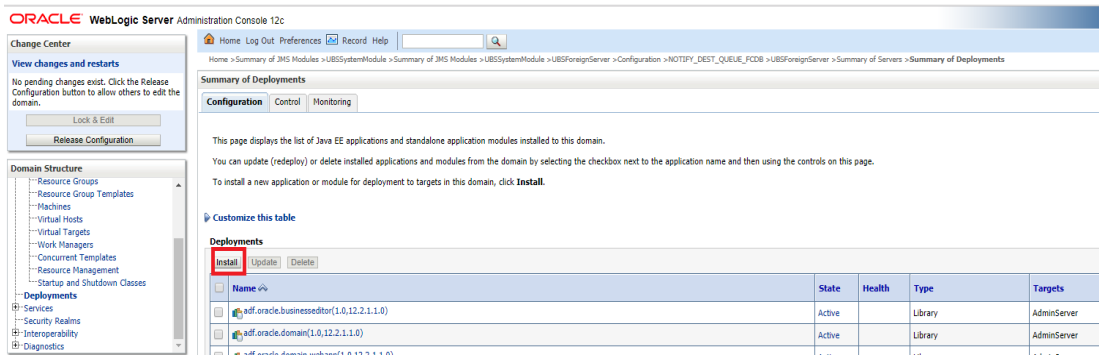


- Click on Upload your file(s)

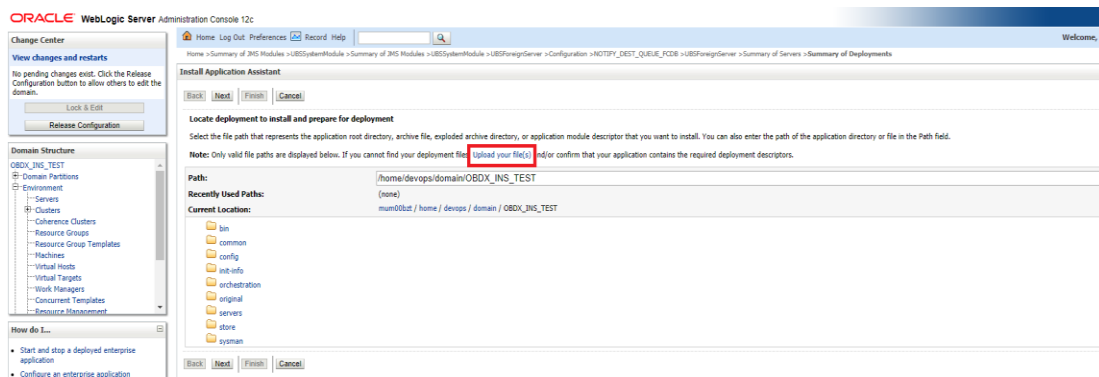


- Click on Choose File under Deployment Archive

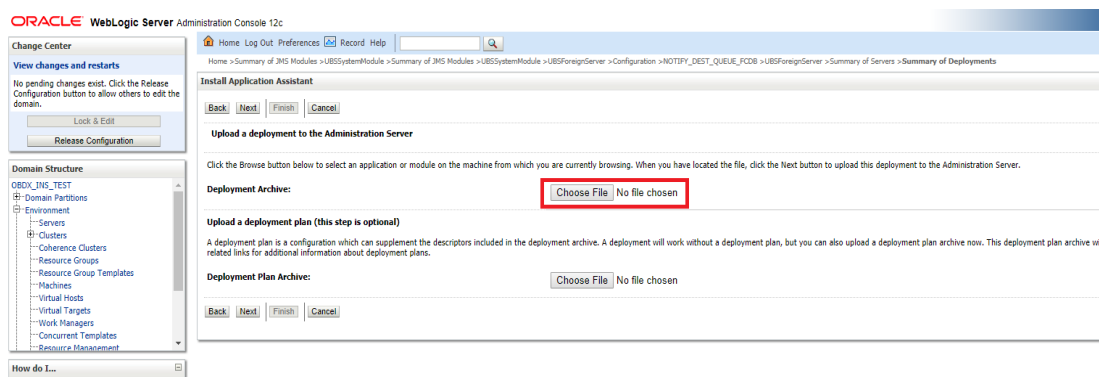


- Navigate to customized obdx.externalsystem.ubs.notification.mdb.ear and click Open

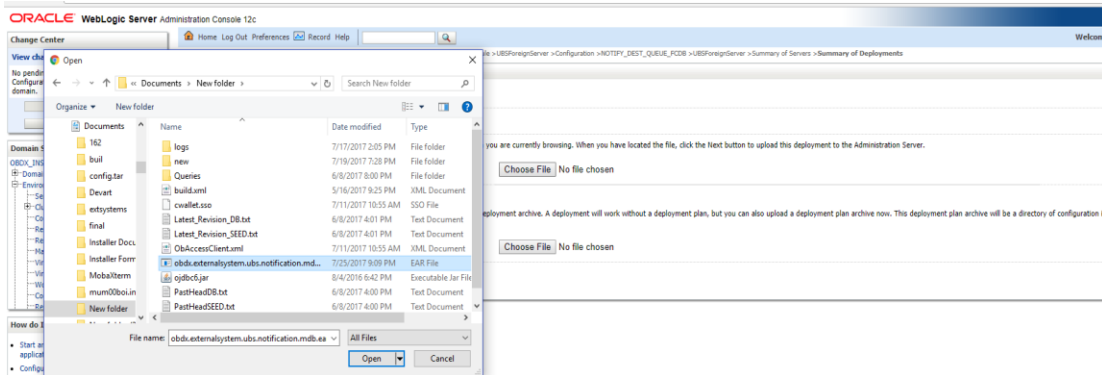


- Click Next

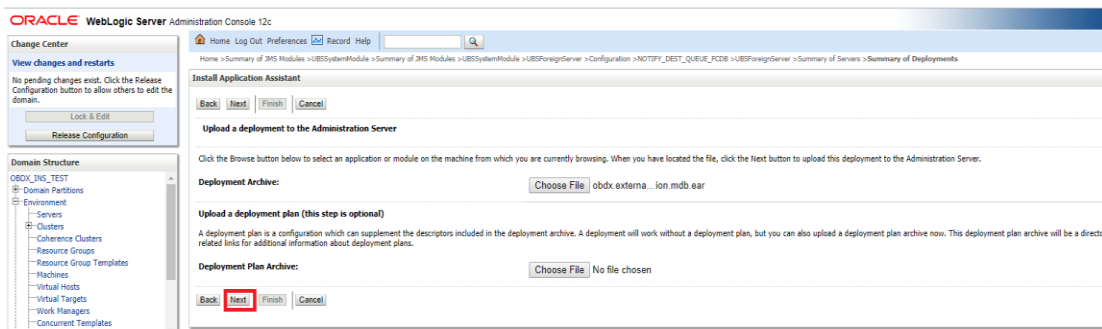


- Click Next

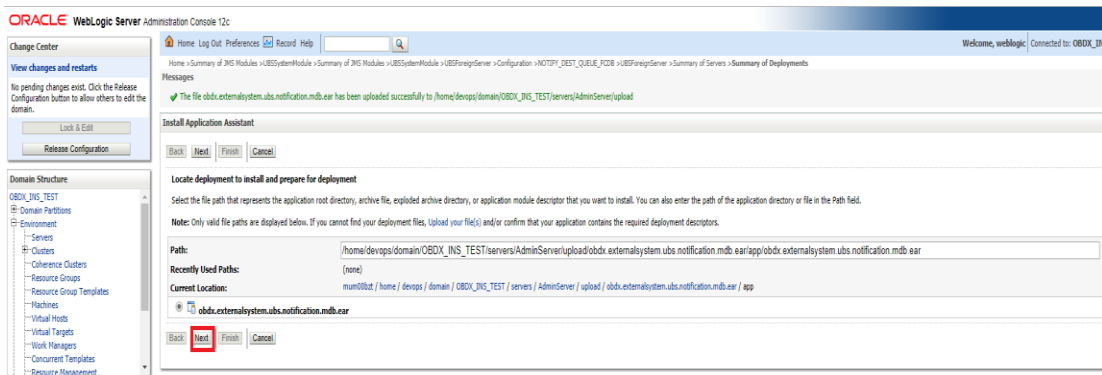


- Select “Install this deployment as an application” and click Next

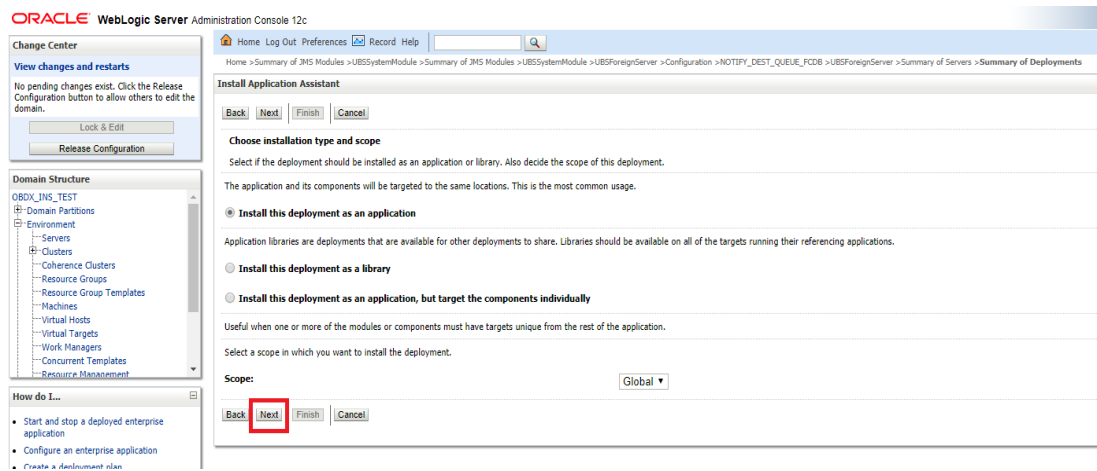


- Select Cluster as target and click Next

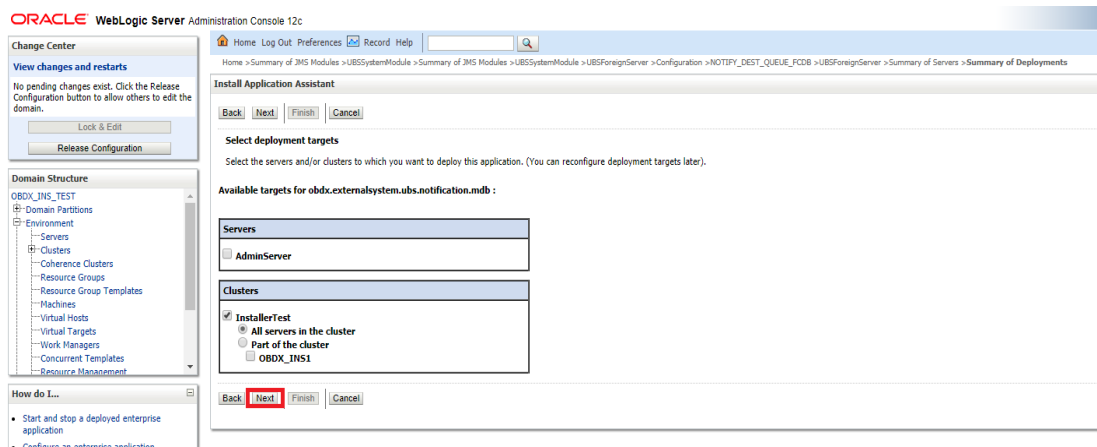

- Click Next

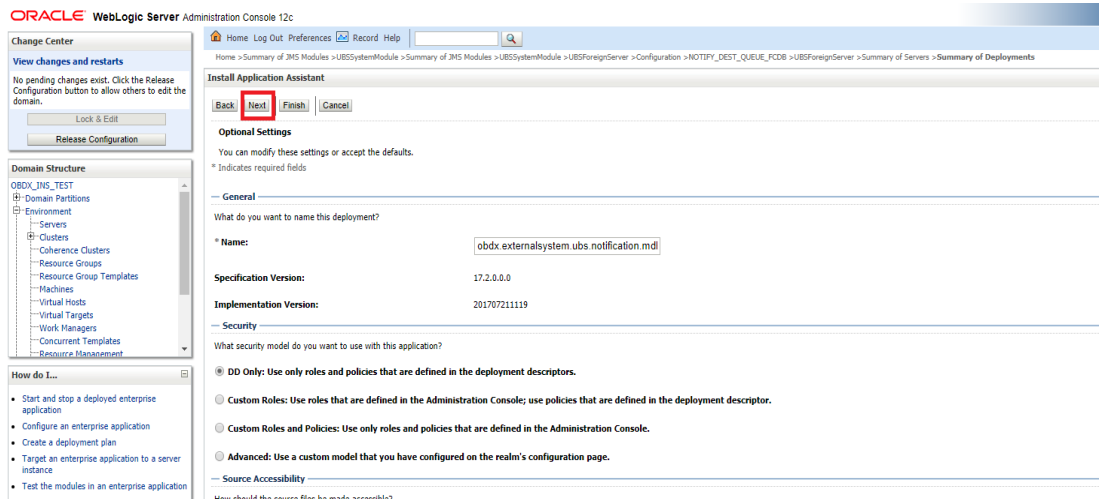

- Click Finish.

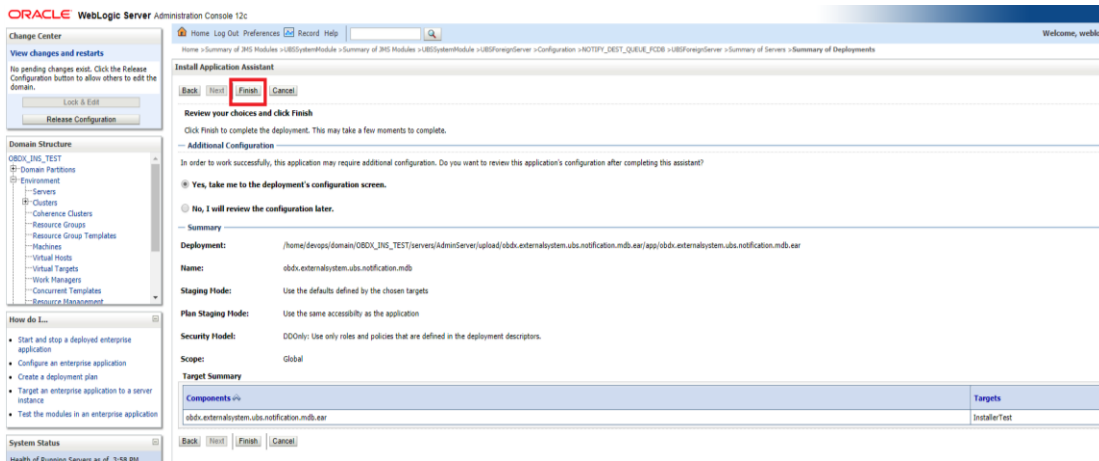

- Click Save.

**ORACLE WebLogic Server Administration Console 12c**

Home Log Out Preferences Record Help

Home > UBSSystemModule > Summary of JMS Modules > UBSSystemModule > UBSForeignServer > Configuration > NOTIPY\_DEST\_QUEUE\_FCOB > UBSForeignServer > Summary of Servers > Summary of Deployments > obdx.externalSystem.ubs.notification.mdb

Settings for obdx.externalSystem.ubs.notification.mdb

Overview Deployment Plan Configuration Security Targets Control Testing Monitoring Notes

**Save**

Use this page to view the general configuration of an enterprise application, such as its name, the physical path to the application files, the associated deployment plan, and so on. The table at the end of the page lists the modules (such as Web the name of the module to view and update its configuration.

<b>Name:</b>	obdx.externalSystem.ubs.notification.mdb	The name of this enterprise application. <a href="#">More</a>
<b>Scope:</b>	Global	Specifies if this enterprise application is accessible from all servers.
<b>Path:</b>	/home/devops/domain/OBDX_INS_TEST/servers/AdminServer/upload/obdx.externalSystem.ubs.notification.mdb.ear/app/obdx.externalSystem.ubs.notification.mdb.ear	The path to the source of the deployable unit.
<b>Deployment Plan:</b>	(no plan specified)	The path to the deployment plan document on the server.
<b>Staging Mode:</b>	(not specified)	Specifies whether a deployment's files are copied to the staging area during application preparation. <a href="#">More Info</a>
<b>Plan Staging Mode:</b>	(not specified)	Specifies whether an application's deployment is staged to the staging area during application preparation. <a href="#">More Info</a>
<b>Security Model:</b>	DDOnly	The security model that is used to secure a deployment.
<b>Deployment Order:</b>	100	An integer value that indicates when this unit is deployed. <a href="#">More Info</a>
<b>Deployment Principal Name:</b>		A string value that indicates the principal that is used to set the current state of the ApplicationLifecycleListener. If no principal name is specified, the default principal is used.

- Click Activate Changes

**ORACLE WebLogic Server Administration Console 12c**

Home Log Out Preferences Record Help

Home > UBSSystemModule > Summary of JMS Modules > UBSSystemModule > UBSForeignServer > Configuration > NOTIPY\_DEST\_QUEUE\_FCOB > UBSForeignServer > Summary of Servers > Summary of Deployments > obdx.externalSystem.ubs.notification.mdb

Messages

Settings updated successfully.

Settings for obdx.externalSystem.ubs.notification.mdb

Overview Deployment Plan Configuration Security Targets Control Testing Monitoring Notes

**Save**

Use this page to view the general configuration of an enterprise application, such as its name, the physical path to the application files, the associated deployment plan, and so on. The table at the end of the page lists the modules (such as Web the name of the module to view and update its configuration.

<b>Name:</b>	obdx.externalSystem.ubs.notification.mdb	The name of this enterprise application. <a href="#">More</a>
<b>Scope:</b>	Global	Specifies if this enterprise application is accessible from all servers.
<b>Path:</b>	/home/devops/domain/OBDX_INS_TEST/servers/AdminServer/upload/obdx.externalSystem.ubs.notification.mdb.ear/app/obdx.externalSystem.ubs.notification.mdb.ear	The path to the source of the deployable unit.
<b>Deployment Plan:</b>	(no plan specified)	The path to the deployment plan document on the server.
<b>Staging Mode:</b>	(not specified)	Specifies whether a deployment's files are copied to the staging area during application preparation. <a href="#">More Info</a>
<b>Plan Staging Mode:</b>	(not specified)	Specifies whether an application's deployment is staged to the staging area during application preparation. <a href="#">More Info</a>
<b>Security Model:</b>	DDOnly	The security model that is used to secure a deployment.
<b>Deployment Order:</b>	100	An integer value that indicates when this unit is deployed. <a href="#">More Info</a>
<b>Deployment Principal Name:</b>		A string value that indicates the principal that is used to set the current state of the ApplicationLifecycleListener. If no principal name is specified, the default principal is used.


**Activate Changes**

System Status

Health of Running Servers as of 3:59 PM

Failed (0)

Critical (0)

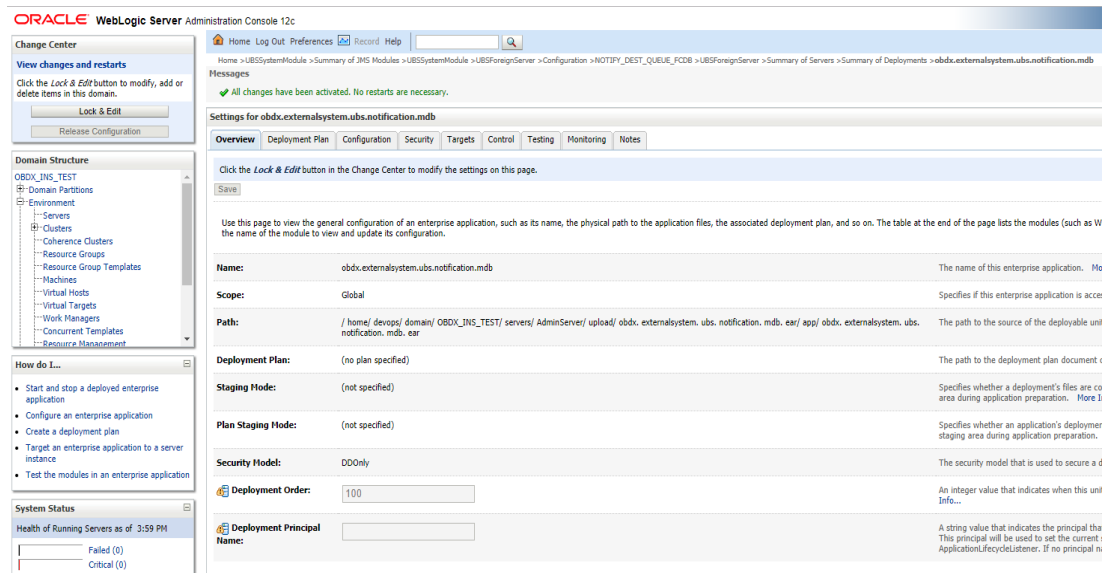


## **Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM)**

If during installer execution Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM) is selected, then below steps needs to be done manually.

### **Foreign Server**

- Login into Weblogic Admin console (OBDX domain created using installer) and Browse to Summary of JMS Modules > OBPMSystemModule > OBPMForeignServer (as shown below)

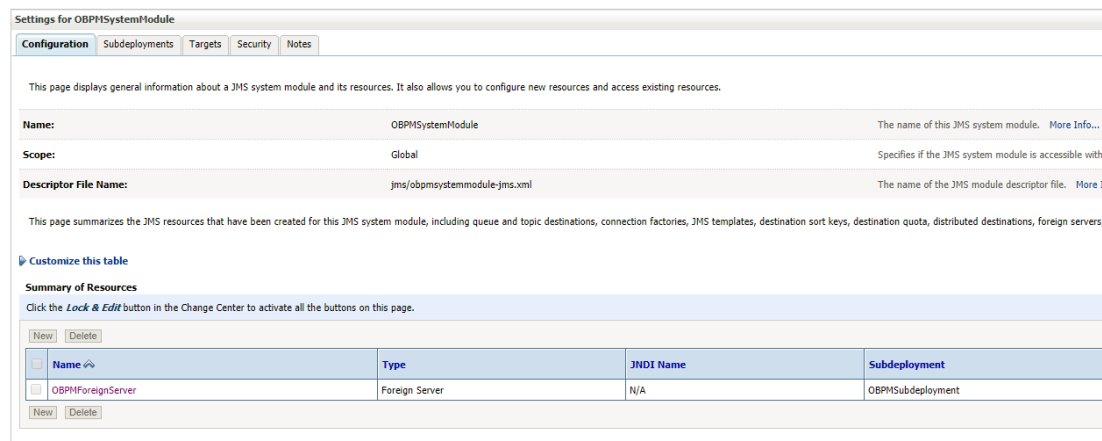

Refer to earlier steps mentioned for **UBS HOST UBSForeignServer** and make similar changes in **OBPMForeignServer**.

### **Deployment of notification MDB application**

Before deployment of obdx.externalsystem.obpm.notification.mdb.ear application, make changes similar to obdx.externalsystem.ubs.notification.mdb.ear before deployment.

### **Fileupload with UBS**

Refer below document for File upload configuration with UBS

- **Oracle Banking Digital Experience File Upload Report Configuration**

### **Origination with UBS**

Refer below document (section 5 and 6) for enabling Origination with UBS

- **Oracle Banking Digital Experience UBS Origination Setup and Configuration**

### **Trade Finance (LC and BG) with OBTFPM**

Refer below document for enabling 'Letter Of Credit' issuance and 'Bank Guarantee' issuance with Oracle Banking Trade Finance Management.

Oracle Banking Mid-Office Product Setup and Configuration Guide

### **OHS**

OHS server needs to be configured for all FLAVOR's as a mandatory activity.

To configure OHS server follow steps mentioned in below document before proceeding further.

- **Oracle Banking Digital Experience OHS User Interface Configuration**

### **Feedback module:**

In order to enable Scale (Rating) icons please refer the section **Creating Procedure of Oracle Banking Digital Experience Content Upload Guide** user manual.

[Home](#)



## 9. OBDX Product Verification

Start managed server and verify all deployed applications are in Active state (as shown below).

<input type="checkbox"/>	AuditMDBEAR	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	BatchResourceAdapter	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	coherence-transaction-rar	Active	✔ OK	Resource Adapter	AdminServer, obdx_cluster	Global		100
<input type="checkbox"/>	com.ofss.digx.app.connector	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	ExtifaceSimulatorMDB	Active	✔ OK	Enterprise Application	obdx_cluster	Global		0


<input type="checkbox"/>	obdx.app.core.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.app.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.app.framework(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.app.mdb.report	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	obdx.app.oauth(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.app.oauth.rest	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	obdx.app.rest.idm	Active	✔ OK	Enterprise Application	obdx_cluster	Global		0
<input type="checkbox"/>	obdx.app.timer	Active	✔ OK	Enterprise Application	obdx_cluster	Global		100
<input type="checkbox"/>	obdx.cz.app.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.cz.extsystem.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.cz.thirdparty.app.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.extsystem.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0
<input type="checkbox"/>	obdx.thirdparty.app.domain(19.2.0.0.0,983)	Active		Library	AdminServer, obdx_cluster	Global		0

To login into application, new user needs to be created (if not already done) in OUD refer section **Creating Groups and System Admin User** on LDAP Server of document **“Oracle Banking Digital Experience Installer Pre-Requsite Setup Manual”** mentioned in section 8.5 Related Information Sources.

To verify the installation, launch below URL

<http://<OHS server ip or hostname>:<OHS port>>

Check if the page loads successfully.

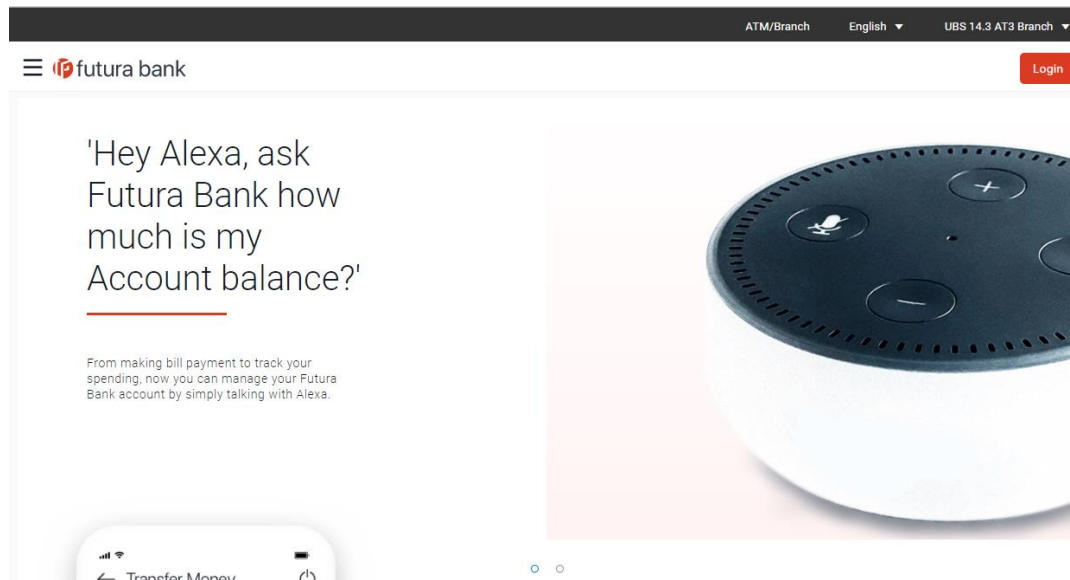

## **Day1 Configuration**

### **Universal Banking Solution (OBDX with UBS)**

Refer below document (Section 3. System Configuration) for Day1 configuration required for integration with UBS

Oracle Banking Digital Experience System Configuration

Once day1 is completed, application is available for end-user transactions.

---

**Note:** Post Day1 restart of Managed server is mandatory

---

### **Third Party System (OBDX with THP)**

Refer below document (Section 5. System Configuration – Host System as Third Party) for Day1 configuration required for integration with Third-party System

Oracle Banking Digital Experience System Configuration

Once day1 is completed, application is available for end-user transactions.

---

**Note:** Post Day1 restart of Managed server is mandatory

---

### **Chat Bot Configuration:**

Refer below document for Chat Bot configuration.

Oracle Banking Digital Experience Chatbot Configuration

**Mobile Application Builder:**

Refer below documents for Mobile Applications build and setup.

Oracle Banking Digital Experience Mobile Application Builder-Android

Oracle Banking Digital Experience Mobile Application Builder-iOS

**Mid Office Configuration:**

**Refer below document for Mid Office Configurations i.e. Trade Finance, Corporate Lending.**

Oracle Banking Mid-Office Product Setup and Configuration Guide.

**Account Uniqueness Configuration:**

Some core banking systems support same account number in multiple branches within the entity. OBDX has support for such core banking systems. However, the configuration is not enabled by default. In case the Bank has core banking system which supports and provides same account numbers across multiple branches, the following scripts should be executed per entity for enabling the support.

```

Insert into DIGX_FW_CONFIG_ALL_O (PROP_ID, PREFERENCE_NAME, PROP_VALUE, DETERMINANT_VALUE,
CREATED_BY, CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE)
values
('obdx.host.account.uniqueness', 'ExtSystemsConfig', 'BRANCH', '<ENTITY_ID>', 'ofssuser', sysdate, 'ofs
suser', sysdate);

Insert into DIGX_FW_CONFIG_ALL_O (PROP_ID, PREFERENCE_NAME, PROP_VALUE, DETERMINANT_VALUE,
CREATED_BY, CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE)
values
('obdx.host.accountbranch.delimiter', 'ExtSystemsConfig', '@~', '<ENTITY_ID>', 'ofssuser', sysdate, 'of
ssuser', sysdate);

```

**Note:** Please ensure that <ENTITY\_ID> has been replaced with correct Entity ID for the corresponding entity.

[Home](#)

## 10. Configuration for OUD/OAM

In-case installation needs to be done using OUD/ OAM provider, below steps needs to be performed manually.

### Weblogic configuration/ deployment

- **REST EAR deployment:**

Undeploy obdx.app.rest.idm from deployments.

Deploy obdx.app.rest from Installer zip (<OBDX INSTALLER DIR>\installables\app\components\obdx\deploy\obdx.app.rest.ear).

**Refer to manual deployment steps provided for obdx.externalsystem.ubs.notification.mdb.ear application**


- **Security Realms**

To configure your own Oracle LDAP to use instead of the default embedded LDAP, which comes with Oracle Weblogic Server.

- To do this, ensure that the Admin Server is running. Login to the Weblogic Console for OBDX domain (created by Installer) using the following URL:

***http://<hostname>:<admin\_port>/console***

- Now, go to Security Realms > myrealm > Providers

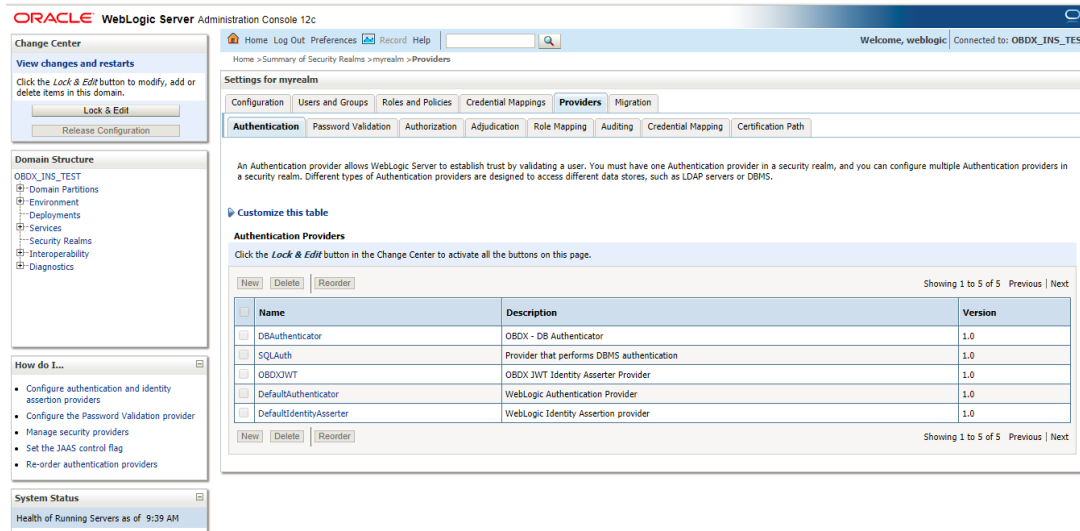

- Now click on “**Lock & Edit**” in order to edit the details.
- Delete the following Authenticators under providers-> **Authentication**:

## DBAuthenticator

## SQLAuth

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: OBDX\_INS\_TEST3

Home > Summary of Environment > Summary of Servers > Summary of Security Realms > myrealm > Providers > Summary of Environment > Summary of Servers > Summary of Security Realms > myrealm > Providers

**Settings for myrealm**

Configuration Users and Groups Roles and Policies Credential Mappings **Providers** Migration

Authentication Password Validation Authorization Adjudication Role Mapping Auditing Credential Mapping Certification Path

An Authentication provider allows WebLogic Server to establish trust by validating a user. You must have one Authentication provider in a security realm, and you can configure multiple Authentication providers in a security realm. Different types of Authentication providers are designed to access different data stores, such as LDAP servers or DBMS.

**Customize this table**

**Authentication Providers**

Name	Description	Version
<input checked="" type="checkbox"/> DBAuthenticator	OBDX - DB Authenticator	1.0
<input checked="" type="checkbox"/> SQLAuth	Provider that performs DBMS authentication	1.0
<input type="checkbox"/> OBDXJWT	OBDX JWT Identity Asserter Provider	1.0
<input type="checkbox"/> DefaultAuthenticator	WebLogic Authentication Provider	1.0
<input type="checkbox"/> DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

Showing 1 to 5 of 5 Previous | Next

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: OBDX\_INS\_TEST1

Home > Summary of Environment > Summary of Servers > Summary of Security Realms > myrealm > Providers > OUDAuthenticator > Providers

**Messages**

Selected Authentication Providers have been deleted.

**Settings for myrealm**

Configuration Users and Groups Roles and Policies Credential Mappings **Providers** Migration

Authentication Password Validation Authorization Adjudication Role Mapping Auditing Credential Mapping Certification Path

An Authentication provider allows WebLogic Server to establish trust by validating a user. You must have one Authentication provider in a security realm, and you can configure multiple Authentication providers in a security realm. Different types of Authentication providers are designed to access different data stores, such as LDAP servers or DBMS.

**Customize this table**

**Authentication Providers**


Name	Description	Version
<input type="checkbox"/> OBDXJWT	OBDX JWT Identity Asserter Provider	1.0
<input type="checkbox"/> DefaultAuthenticator	WebLogic Authentication Provider	1.0
<input type="checkbox"/> DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

Showing 1 to 3 of 3 Previous | Next

- Click on **“DefaultAuthenticator”** provider and change the Control Flag to SUFFICIENT

- Click on Save button to save the changes


- Navigate Back to Security Realms > myrealm > Providers

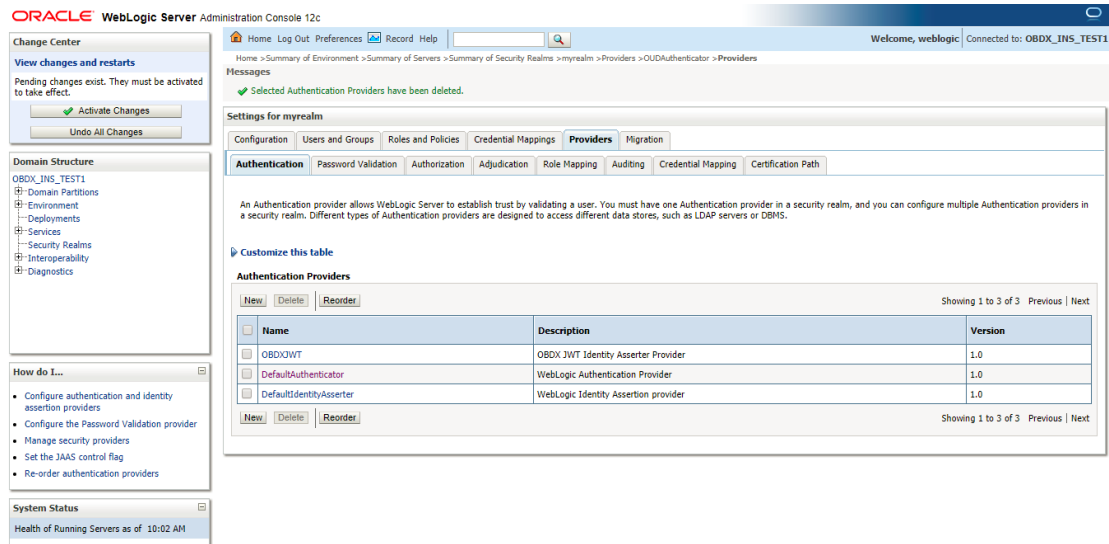

- Now, click on New and enter the below details and click Save.

Name : OUDAuthenticator

Type : OracleUnifiedDirectoryAuthenticator

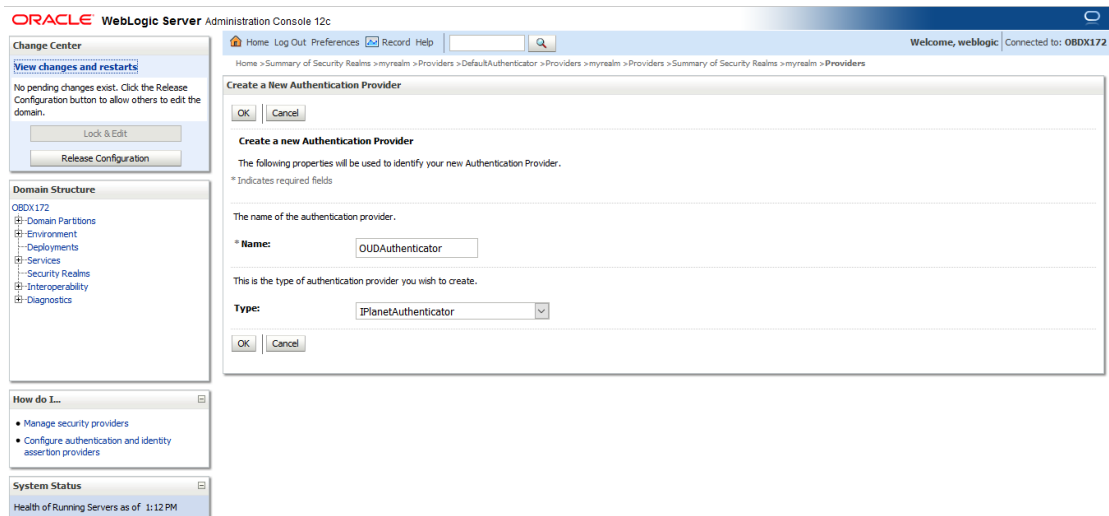

- Click on OK Button.

The screenshot shows the Oracle WebLogic Server Administration Console. The main content area is titled 'Settings for myrealm' and has a sub-tab 'Providers'. Below this, there is a table of 'Authentication Providers'. The table has columns for 'Name', 'Description', and 'Version'. The providers listed are:

Name	Description	Version
OBDXJWT	OBDX JWT Identity Asserter Provider	1.0
DefaultAuthenticator	WebLogic Authentication Provider	1.0
DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0
OUDAuthenticator	Provider that performs LDAP authentication	1.0

On the left side of the console, there are several panels: 'Change Center' with 'Activate Changes' and 'Undo All Changes' buttons; 'Domain Structure' showing a tree view of the environment; 'How do I...?' with a list of help topics; and 'System Status' showing the health of running servers.

Now Click on OUDAuthenticator and select Control Flag as “SUFFICIENT”


The screenshot shows the Oracle WebLogic Server Administration Console with the configuration page for the 'OUDAuthenticator' provider. The page is titled 'Settings for OUDAuthenticator' and has a sub-tab 'Provider Specific'. The configuration details are as follows:

- Name:** OUDAuthenticator
- Description:** Provider that performs LDAP authentication
- Version:** 1.0
- Control Flag:** SUFFICIENT (selected from a dropdown menu)

The page also includes a 'Save' button and a brief description of the provider's role in the login sequence.



- Click on Save Button.

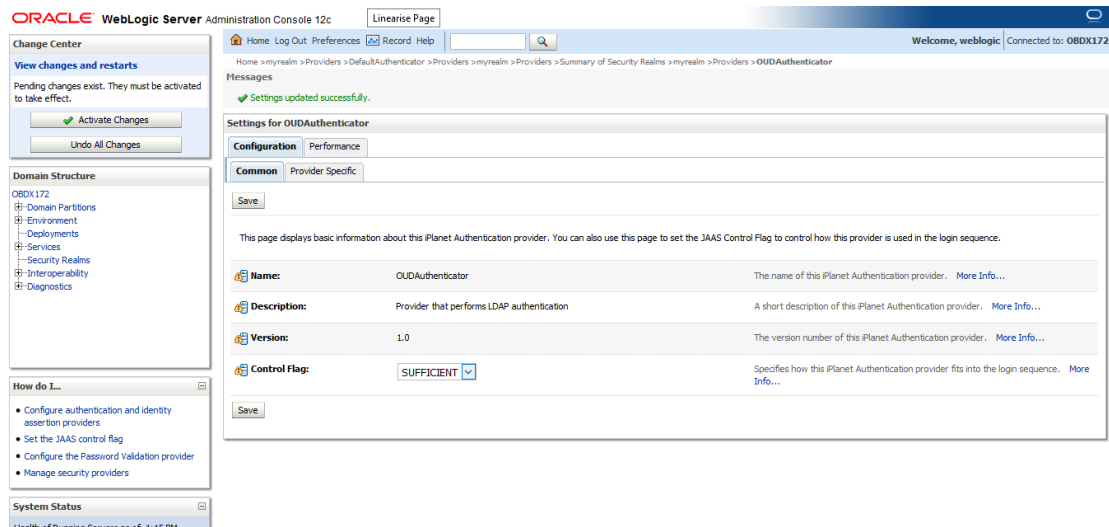


- Now under Provider Specific tab set the details of LDAP where the server should point. Refer to the following table for more information:

Property	Value
Host	This is the LDAP Server (OUD) Hostname
Port	This is the LDAP Server (OUD) Port. E.g. 1389
Principal	This is the Administrator Account name. E.g. cn=orcladmin
Credential	This is the Administrator Account password.
Confirm Credential	Confirm the Administrator Account password.
UserBase DN	This is the OUD user search base For e.g.: cn=Users, dc=in,dc=oracle,dc=com
GroupBase DN	This is the OUD group search base For e.g.: cn=Groups, dc=in,dc=oracle,dc=com

Configuration		Performance
Common		Provider Specific
<p>Use this page to define the provider specific configuration for this Planet Authentication provider.</p>		
<p>Save</p>		
<p>Use this page to define the provider specific configuration for this Planet Authentication provider.</p>		
<p>— Connection</p>		
Host:	<input type="text" value="num00oon.in.oracle.com"/>	The host name or IP address of the LDAP server. <a href="#">More Info...</a>
Port:	<input type="text" value="1389"/>	The port number on which the LDAP server is listening. <a href="#">More Info...</a>
Principal:	<input type="text" value="cn=orcladmin"/>	The Distinguished Name (DN) of the LDAP user that WebLogic Server should use to connect to the LDAP server. <a href="#">More Info...</a>
Credential:	<input type="password" value="••••••••"/>	The credential (usually a password) used to connect to the LDAP server. <a href="#">More Info...</a>
Confirm Credential:	<input type="password" value="••••••••"/>	
<input type="checkbox"/> SSL Enabled		Specifies whether the SSL protocol should be used when connecting to the LDAP server. <a href="#">More Info...</a>
<p>— Users</p>		
User Base DN:	<input type="text" value="dc=in,dc=oracle,dc=com"/>	The base distinguished name (DN) of the tree in the LDAP directory that contains users. <a href="#">More Info...</a>
<input type="checkbox"/> All Users Filter:	<input type="text"/>	If the attribute (user object class) is not specified (that is, if the attribute is null or empty), a default search filter is created based on the user schema. <a href="#">More Info...</a>
<input type="checkbox"/> User From Name Filter:	<input "="" type="text" value="(&amp;(uid=%u))objectclass="/>	If the attribute (user name attribute and user object class) is not specified (that is, if the attribute is null or empty), a default search filter is created based on the user schema. <a href="#">More Info...</a>

<input type="checkbox"/> User Name Attribute:	<input type="text" value="uid"/>	The attribute of an LDAP user object that specifies the name of the user. <a href="#">More Info...</a>
<input type="checkbox"/> User Object Class:	<input type="text" value="person"/>	The LDAP object class that stores users. <a href="#">More Info...</a>
<input type="checkbox"/> Use Retrieved User Name as Principal		Specifies whether or not the user name retrieved from the LDAP server should be used as the Principal in the Subject. <a href="#">More Info...</a>
<p>— Groups</p>		
Group Base DN:	<input type="text" value="dc=in,dc=oracle,dc=com"/>	The base distinguished name (DN) of the tree in the LDAP directory that contains groups. <a href="#">More Info...</a>
<input type="checkbox"/> All Groups Filter:	<input type="text"/>	An LDAP search filter for finding all groups beneath the base group distinguished name (DN). If the attribute is not specified (that is, if the attribute is null or empty), a default search filter is created based on the Group schema. <a href="#">More Info...</a>
<input type="checkbox"/> Group From Name Filter:	<input "="" type="text" value="( (&amp;(cn=%g))objectclass="/>	An LDAP search filter for finding a group given the name of the group. If the attribute is not specified (that is, if the attribute is null or empty), a default search filter is created based on the group schema. <a href="#">More Info...</a>
Group Search Scope:	<input type="text" value="subtree"/>	Specifies how deep in the LDAP directory tree to search for groups. Valid values are subtree and onelevel. <a href="#">More Info...</a>
Group Membership Searching:	<input type="text" value="unlimited"/>	Specifies whether group searches into nested groups are unlimited, limited or off. Valid values are unlimited, limited and off. <a href="#">More Info...</a>
Max Group Membership Search Level:	<input type="text" value="0"/>	Specifies how many levels of group membership can be searched. This setting is valid only if GroupMembershipSearching is set limited. Valid values are 0 and positive integers. For example, 0 indicates only direct group memberships will be found, and a positive number indicates the number of levels to search. <a href="#">More Info...</a>
<input type="checkbox"/> Ignore Duplicate Membership		Determines whether duplicate members are ignored when adding groups. The attribute cycles in the Group membership. <a href="#">More Info...</a>
<p>— Static Groups</p>		


- Click on Save to update the changes.
- Navigate Back to Security Realms > myrealm > Providers

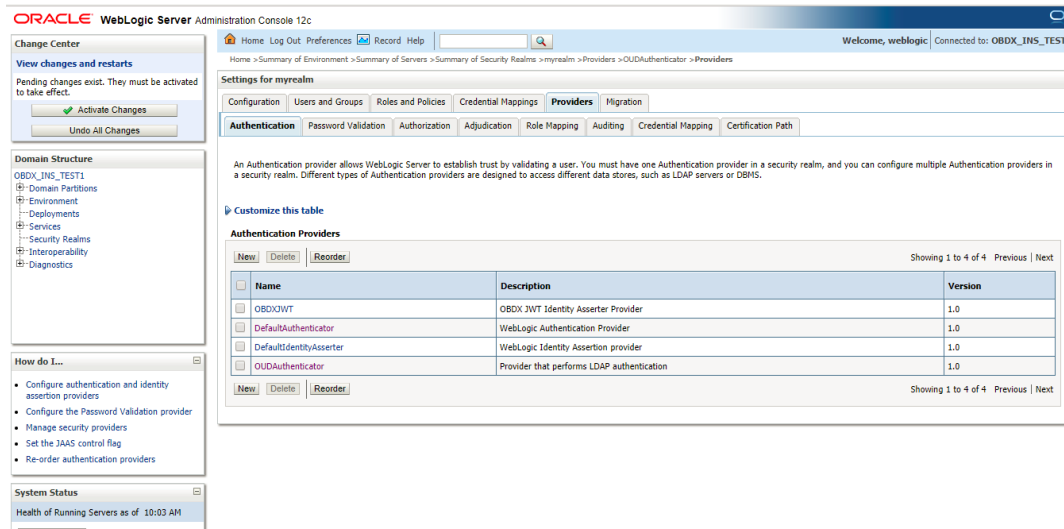


- Now, click on New and enter the below details and click Save.

Name : OAMIdentityAsserter


Type : OAMIdentityAsserter

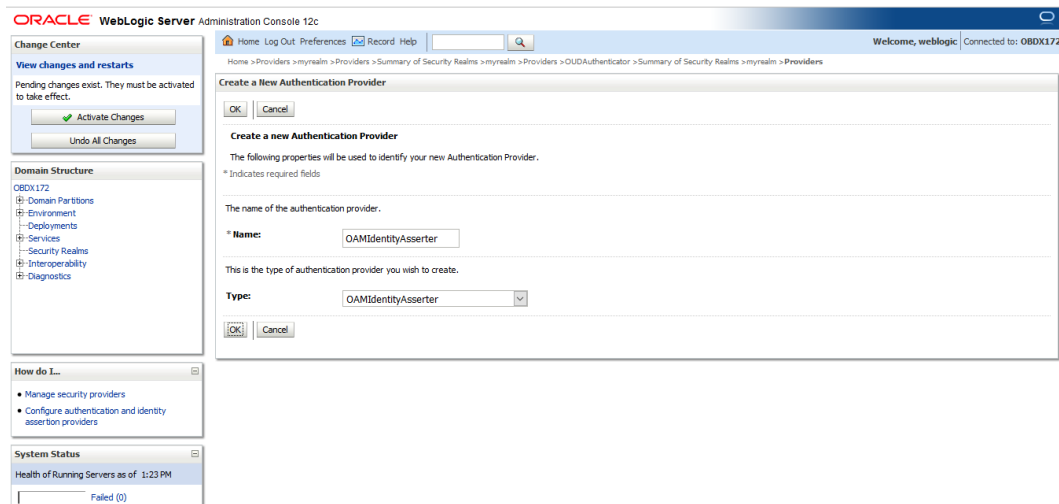


- Click on OK Button.

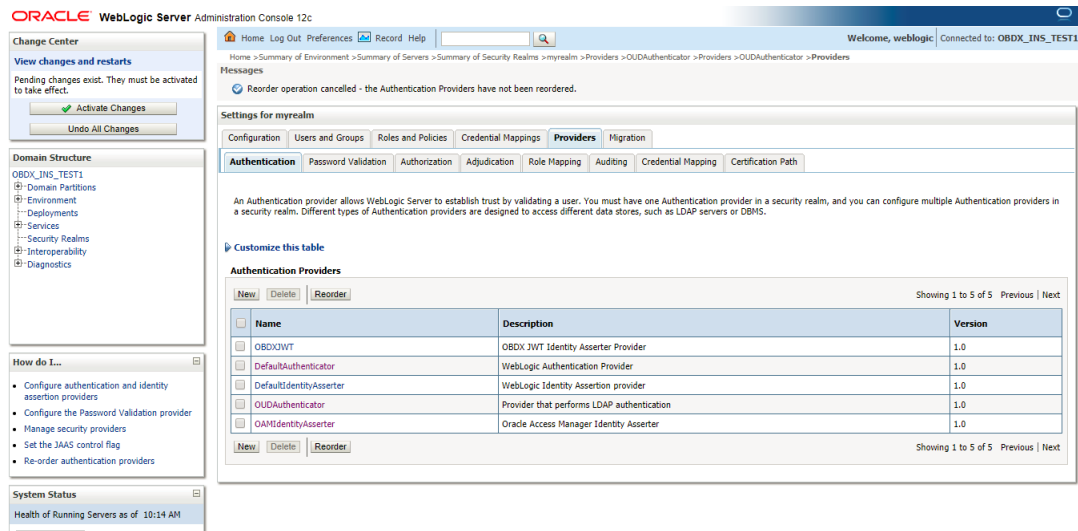


- Click on Reorder Button.

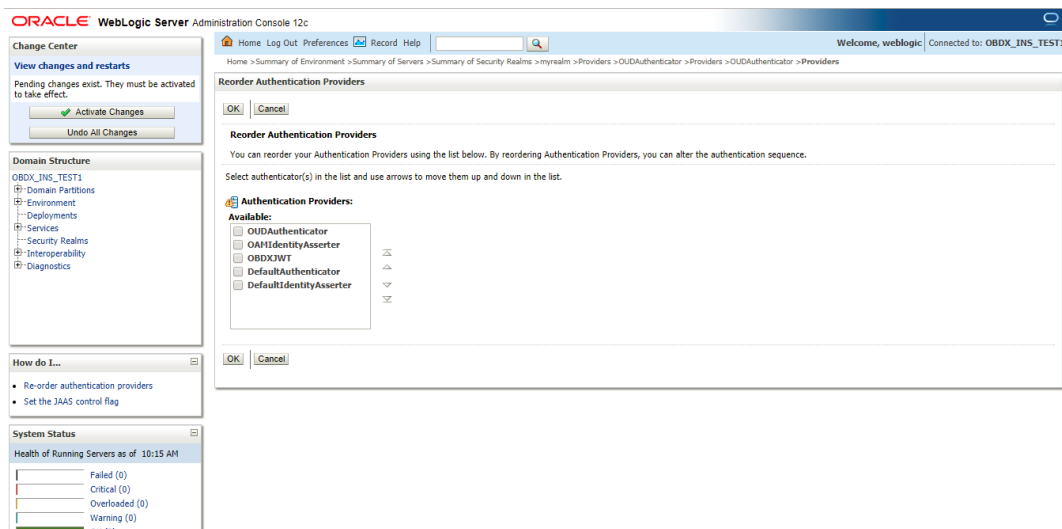

- Reorder the providers so that LDAP Provider (OUDAuthenticator) gets highest priority followed by OAMIdentityAsserter, OBDXJWT, DefaultAuthenticator, DefaultIdentityAsserter.

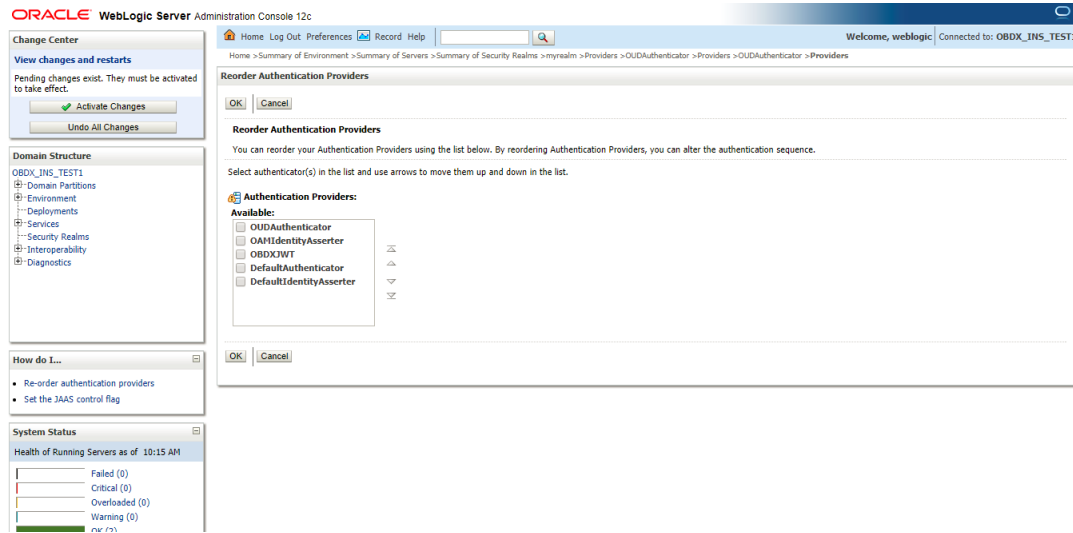

- Click on OK Button.

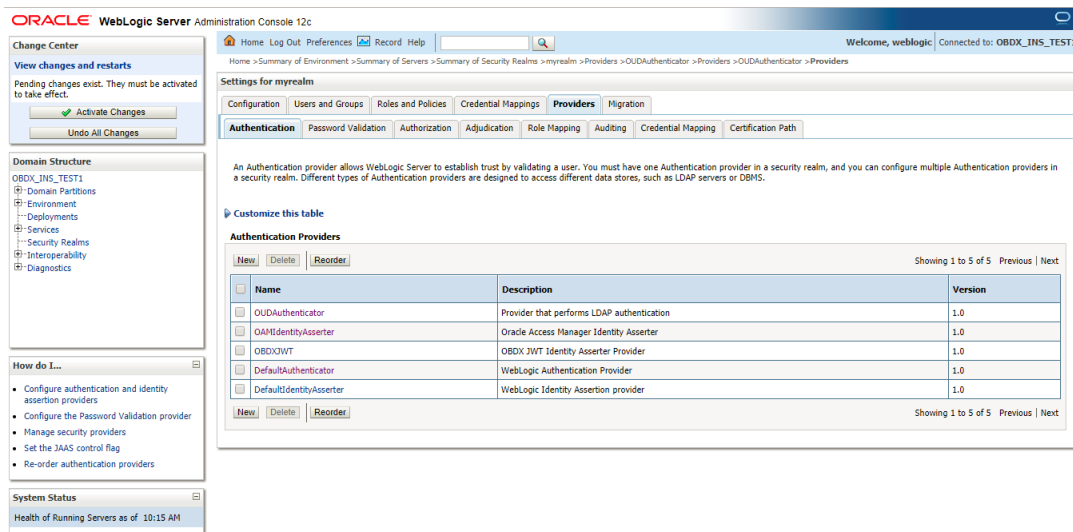

- Set the **OAuth URL for OBDXJWT**

**Settings for OBDXJWT**

**Configuration**

Common **Provider Specific**

Save

This page allows you to configure additional attributes for this security provider.

**OAuth URL:**

**SSLEnabled**

Save

Sample OAuth URL: <http://<hostname>:<port>/digx-auth/v1/token/info> (hostname and port should be replaced with OAM Server setup).

- Click on **Activate Changes** to apply the changes.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: OBDX\_INNS\_TEST1

Settings for myrealm

Configuration Users and Groups Roles and Policies Credential Mappings **Providers** Migration

Authentication Password Validation Authorization Adjudication Role Mapping Auditing Credential Mapping Certification Path

An Authentication provider allows WebLogic Server to establish trust by validating a user. You must have one Authentication provider in a security realm, and you can configure multiple Authentication providers in a security realm. Different types of Authentication providers are designed to access different data stores, such as LDAP servers or DBMS.

Customize this table

Authentication Providers

Name	Description	Version
OUDAuthenticator	Provider that performs LDAP authentication	1.0
OAMIdentityAsserter	Oracle Access Manager Identity Asserter	1.0
OBDXJWT	OBDX.JWT Identity Asserter Provider	1.0
DefaultAuthenticator	WebLogic Authentication Provider	1.0
DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

- Now go to the `<DOMAIN_PATH>/<DOMAIN_NAME>/config/fmwconfig/`
- Open `jps-config.xml`

Replace the line: `<serviceInstanceRef ref="idstore.custom"/>`

With `<serviceInstanceRef ref="idstore.ldap"/>`

```

    </serviceInstance>
    <serviceInstance name="policystore.db" provider="policystore.provider">
      <propertySetRef ref="props.db.1"/>
    </serviceInstance>
  </serviceInstances>
  <jpsContexts default="default">
    <jpsContext name="default">
      <serviceInstanceRef ref="credstore.db"/>
      <serviceInstanceRef ref="keystore.db"/>
      <serviceInstanceRef ref="policystore.db"/>
      <serviceInstanceRef ref="audit.db"/>
      <serviceInstanceRef ref="trust"/>
      <serviceInstanceRef ref="pdp.service"/>
      <serviceInstanceRef ref="attribute"/>
      <serviceInstanceRef ref="idstore.custom"/>
    </jpsContext>
    <jpsContext name="bootstrap_credstore_context">
      <serviceInstanceRef ref="bootstrap_credstore"/>
      <serviceInstanceRef ref="keystore"/>
    </jpsContext>
    <jpsContext name="bootstrap_credstore_context_local">
      <serviceInstanceRef ref="bootstrap_credstore.local"/>
    </jpsContext>
  </jpsContexts>
</jpsConfig>

```

```

    <serviceInstance name="policystore.db" provider="policystore.provider">
      <propertySetRef ref="props.db.1"/>
    </serviceInstance>
  </serviceInstances>
  <jpsContexts default="default">
    <jpsContext name="default">
      <serviceInstanceRef ref="credstore.db"/>
      <serviceInstanceRef ref="keystore.db"/>
      <serviceInstanceRef ref="policystore.db"/>
      <serviceInstanceRef ref="audit.db"/>
      <serviceInstanceRef ref="trust"/>
      <serviceInstanceRef ref="pdp.service"/>
      <serviceInstanceRef ref="attribute"/>
      <serviceInstanceRef ref="idstore.ldap"/>
    </jpsContext>
    <jpsContext name="bootstrap_credstore_context">
      <serviceInstanceRef ref="bootstrap_credstore"/>
      <serviceInstanceRef ref="keystore"/>
    </jpsContext>
    <jpsContext name="bootstrap_credstore_context_local">
      <serviceInstanceRef ref="bootstrap_credstore.local"/>
    </jpsContext>
  </jpsContexts>
</jpsConfig>

```

- Now Shutdown the Admin server.
  - Now, again start the Admin Server using the command,
 

```
<DOMAIN_PATH>/<DOMAIN_NAME>/bin/startWeblogic.sh
```
- Run the following script into OBDX Schema:

```

update DIGX_FW_CONFIG_ALL_B set prop_value =
'ipm1.0,ORACLEBI12.2.1.2,GENERIC1.0,OAM122130,OU1.0' where prop_id = '01' and category_id
= 'extxfaceadapterconfig';

```

commit;

- Restart Managed Server

### Verification

Post Admin and Managed Servers restart, login into Admin Console and browse to Security Realms > myrealm > Users and Groups.

Under Users tab additional LDAP users would be populated and additional LDAP groups can be seen under Groups tab.

The screenshot shows the 'Users' tab in the 'Settings for myrealm' section. The interface includes a left-hand navigation pane with 'Change Center', 'Domain Structure', 'How do I...', and 'System Status'. The main content area displays a table of users with columns for Name, Description, and Provider. The table lists several users, all of whom are provided by OUD.

Name	Description	Provider
000800		OUD
000801		OUD
1207payday1@o.com		OUD
1207payday2@o.com		OUD
1207payday3@o.com		OUD
1207savings1@o.com		OUD
12jun.d1@ora.com		OUD
12jun.d2@ora.com		OUD
12jun.d3@ora.com		OUD
171040		OUD

The screenshot shows the 'Groups' tab in the 'Settings for myrealm' section. The interface is similar to the previous screenshot, but the main content area displays a table of groups. The table lists various groups, each with a description and a provider. Providers include DefaultAuthenticator and OUD.

Name	Description	Provider
AdminChannelUsers	AdminChannelUsers can access the admin channel.	DefaultAuthenticator
AdminChecker		OUD
Administrator		OUD
Administrators		OUD
Administrators	Administrators can view and modify all resource attributes and start and stop servers.	DefaultAuthenticator
AdminMaker		OUD
AppTesters	AppTesters group.	DefaultAuthenticator
AuthAdmin		OUD
Checker		OUD
CorporateAdminChecker		OUD

[Home](#)



## 11. Multi Entity

To add entity to existing OBDX with supported host system follow below steps.

- Add entity through OBDX Web application, using
  - User Manual Oracle Banking Digital Experience System Configuration User Manual
- In case of OBTFPM integration, following document should be referred.
- Oracle Banking Mid-Office Product Setup and Configuration Guide Running OBDX installer

Ensure that Managed server should be down and Admin server should be running state.

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.


Login with OS user which was used to perform OBDX software installation (or has ownership on Oracle Weblogic home directory)

Ensure OBDX installation details (OBDX DB; WLS etc) are maintained in installer.properties and user running the installer has read-write permissions.

- From your terminal navigate to <OBDX INSTALLER DIR>
- Enter the following command

```
python runInstaller.py
```

Select installation type as 'New Entity Creation'

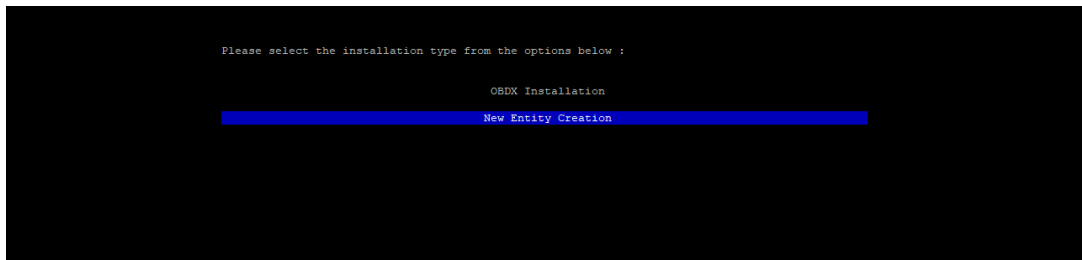

```

Please select the installation type from the options below :

                                OBDX Installation
                                _____
                                New Entity Creation
  
```

Below screen will appear after selecting add entity



```

Enter the entity code :
>>OBDX_BUI
Valid.
Enter password for the OBDX Schema :
>>*****
  
```

Enter below information:

- Entity code which has been added from screen
- OBDX schema password

If an entity code belongs to UBS / OBPM host following screen (below screenshot are for OBPM ; for UBS same input are required) will appear:

```

Enter the OBPM143 DB hostname :
>>

Enter the OBPM143 DB port :
>>

Enter the OBPM143 SID :
>>

Enter the Directory name for Tablespace creation (DBA_DIRECTORIES) :
>>

Enter the username with 'sys' privileges :
>>

Enter password for the user with sys privileges :
>>

Enter existing weblogic admin password :
>>

Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

```

```

Enter the OBPM143 DB hostname :
>>mumaa012.in.oracle.com
Valid.
Enter the OBPM143 DB port :
>>1520
Valid.
Enter the OBPM143 SID :
>>obdxkhat.in.oracle.com
Valid.
Enter the Directory name for Tablespace creation (DBA_DIRECTORIES) :
>>TBS_DIR
Valid.
Enter the username with 'sys' privileges :
>>sys
Valid.
Enter password for the user with sys privileges :
>>*****
Valid.
Enter existing weblogic admin password :
>>*****
Valid.
Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

```

Enter below details:

- Hostname of the database host server
- Port of the database host server
- Host database Service Name
- Oracle directory name in which you want the database datafile (dbf) to be created. Enter only the name NOT the path.
- Username with 'sys' privileges
- SYS privilege user password where UBS schema would be created
- Weblogic console administrator user password

```

Enter the existing OBPM143 host schema name :
>>

Enter the password for existing OBPM143 host schema :
>>

Enter new OBPM143 BIAL schema name :
>>

Enter new schema password :
>>

Enter country code :
>>

Use (1/1) keys to navigate between questions and press 'enter' after editing them

```

Enter below details:

- EXISTING Host schema name
- Password for EXISTING schema
- Complete EHMS (HostInterface) schema name you want installer to create as new schema
- Password for New schema
- Country Code of entity branch

### Installation Status in case of UBS / OBPM

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

```

@obdevh/obdevh/obdevh/4/OSDK_31222
jdevops@obdevh:~$ python runinstaller.py

Starting UBS Database Installation...
Creating Tablespace...
Tablespace Created
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
Execution of table-scripts.sql started
Execution of table-scripts.sql completed
Execution of uba_object_scripts.sql started
Execution of uba_object_scripts.sql completed
Execution of execute-seeds.sql started
Execution of execute-seeds.sql completed
SUCCESSFULLY installed UBS database
Executed OSDK_FW_CONFIG_ALL_0.sql successfully

Starting Entity Configuration

Calling WLST

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://obdevh1a:9001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBPM31222".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port of Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Creating Data source OSDK_WS1_BIA1

```

When the installation completes, the below message is displayed

```

@obdxwls/tonch/obdx/v4/OBDX_183100
Execution of uba_object_scripts.sql completed
Execution of execute-seeds.sql started
Execution of execute-seeds.sql completed
SUCCESSFULLY installed UBS database
Executed DIGX_FW_CONFIG_ALL_0.sql successfully

Starting Entity Configuration

Calling WLST

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://obdxwls.in.oracle.com:9001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX1831INS".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help("edit").

Creating Data source OBDX_BUI_BIAI
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDX_BUI_BIAI created successfully.

Exiting WebLogic Scripting Tool.

Entity successfully configured.
[devops@obdxwls

```

Post successful installation refer to “Section 8: Post Installation steps” for manual steps to be performed for UBS additional entity (sub-section : Oracle FLEXCUBE Universal Banking (OBDX with UBS)).

**If an entity code belongs to Third-party host following screen will appear:**

```

[devops@ OBDX_Installer]$ export Entity_Code=OBDX_BUI
[devops@ OBDX_Installer]$ export SCHEMA_PASS=welcome1
[devops@ OBDX_Installer]$ export FLAVOUR=OBDX
[devops@ OBDX_Installer]$ python runInstaller.py --silent --addEntity
Password validated for OBDX_1831INS
Execution of DB script for OBDX_BUI started
Executed DIGX_FW_CONFIG_ALL_0.sql successfully
Execution completed.
[devops@ OBDX_Installer]$

```

**No additional steps/ configuration are required.**

**If an entity code belongs to Oracle FLEXCUBE Core Banking host following screen will appear:**

```

Enter the FCORE DB hostname :
>>

Enter the FCORE DB port :
>>

Enter the FCORE SID :
>>

Enter the Directory name for Tablespace creation (DBA_DIRECTORIES) :
>>

Enter the username with 'sys' privileges :
>>

Enter password for the user with sys privileges :
>>

Enter existing weblogic admin password :
>>

Use (/;) keys to navigate between questions and press 'enter' after editing them

```

```

Enter the FCORE DB hostname :
>>mumaa012.in.oracle.com
Valid.
Enter the FCORE DB port :
>>1520
Valid.
Enter the FCORE SID :
>>obdxhat.in.oracle.com
Valid.
Enter the Directory name for Tablespace creation (DBA_DIRECTORIES) :
>>TBS_DIR
Valid.
Enter the username with 'sys' privileges :
>>sys
Valid.
Enter password for the user with sys privileges :
>>*****
Valid.
Enter existing weblogic admin password :
>>*****
Valid.
Use (/;) keys to navigate between questions and press 'enter' after editing them

```

Enter below details:

- Hostname of the FCORE database host server
- Port of the FCORE database host server
- FCORE Host database Service Name
- Oracle directory name in which you want the database datafile (dbf) to be created. Enter only the name NOT the path.
- Username with 'sys' privileges

- SYS privilege user password where FCORE schema would be created
- Weblogic console administrator user password

```

Enter the existing FCR schema name :
>>

Enter the existing FCUBS schema name :
>>

Enter new FCORE schema name :
>>

Enter new schema password :
>>

Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

```

```

Enter the existing FCR schema name :
>>FCRHOST
Valid.

Enter the existing FCUBS schema name :
>>FCRUBSHOST
Valid.

Enter new FCORE schema name :
>>FCRHOSITST
Valid.

Enter new schema password :
>>*****
Valid.

Use (↑/↓) keys to navigate between questions and press 'enter' after editing them

```

Enter below details:

- EXISTING FCORE HOST schema name
- EXISTING FCORE FCUBS schema name
- Complete EHMS (HostInterface) schema name you want installer to create as new schema
- Password for New EHMS schema

## Installation status for FCORE Add entity

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

```
[devops@ ~]$ OBDX_Installer]$ python runInstaller.py --silent --addEntity
Password validated for OBDX_183INS
Password validated for sys

Starting FCORE Database Installation...
Creating Tablespace...
Tablespace Created
Creating User...
User Created
Creating Role...
Roles Created
Executing Grants...
Execution of table-scripts.sql started
Execution of table-scripts.sql completed
Execution of fcore_object_scripts.sql started
```

```
@obdxwls/scratch/obdx/OBDX_Installer
Execution of fcore_object_scripts.sql started
Execution of fcore_object_scripts.sql completed
Execution of execute-seeds.sql started
Execution of execute-seeds.sql completed
SUCCESSFULLY installed FCORE database

Starting Entity Configuration
Calling WLST

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://obdxwls.in.oracle.com:9001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX183INS".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Creating Data source OBDX_BUI_BIA1
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDX_BUI_BIA1 created successfully.

Exiting WebLogic Scripting Tool.

Entity successfully configured.
[devops@obdxwls OBDX_Installer]$
```

## No additional steps/ configuration are required.

Post successful installation refer to “Section 8: Post Installation steps” for manual steps to be performed for OBPM additional entity (sub-section: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM)).



## 12. Multi-entity installation using Silent Mode

This chapter describes how to run the OBDX installer for add entity in silent mode.

Ensure that Managed server should be down and Admin server should be running.

Ensure ORACLE\_HOME, JAVA\_HOME variable are set and their binaries are available in PATH variable before proceeding.

Login with OS user which was used to perform OBDX software installation (or has ownership on Oracle Weblogic home directory)

### Steps for Silent-Mode Installation

- Set the environment variables, as shown below.

```

OBDX_Installer]$ export Entity_Code=OBDX_BU7
OBDX_Installer]$ export SCHEMA_PASS=welcomel
OBDX_Installer]$ export ENTITY_EHMS_DATABASE_HOSTNAME=hostanme.in.oracle.com
OBDX_Installer]$ export ENTITY_EHMS_DATABASE_PORT=1520
OBDX_Installer]$ export ENTITY_EHMS_DATABASE_SID=obdxdb.in.oracle.com
OBDX_Installer]$ export ENTITY_EHMS_DBA_DIRECTORY_NAME=TBS_DIR
OBDX_Installer]$ export ENTITY_EHMS_DATABASE_SYS_USER=sys
OBDX_Installer]$ export ENTITY_EHMS_DATABASE_SYS_PASS=welcomel
OBDX_Installer]$ export ENTITY_EHMS_SCHEMA_NAME=welcomel
OBDX_Installer]$ export ENTITY_EHMS_SCHEMA_PASS=welcomel
OBDX_Installer]$ export ENTITY_EHMS_HOST_SCHEMA_NAME=FCUBS140
OBDX_Installer]$ export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=welcomel
OBDX_Installer]$ export WLS_DOMAIN_PASS=welcomel
OBDX_Installer]$ export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=FCUBS140
OBDX_Installer]$ export ENTITY_EHMS_CCY=GB
OBDX_Installer]$ python runInstaller.py --silent --addEntity

```

Below parameters should be set in environment variables

	Parameter	Description	Example
<b>Environment variables to set for flavor:</b>  <b>FCORE</b>  <b>UBS (14.3.0.0.0 release)</b> <b>OBPM (14.3.0.0.0 release)</b>	Entity_Code	Entity code which has been entered from screen	<b>export Entity_Code=OBDX_BU7</b>
	SCHEMA_PASS	Password for existing OBDX schema	<b>export SCHEMA_PASS=devops#obdx182</b>
	ENTITY_EHMS_DATABASE_HOSTNAME	Hostname of the EHMS HOST database host server	<b>export ENTITY_EHMS_DATABASE_HOSTNAME=mumaa012.in.oracle.com</b>
	ENTITY_EHMS_DATABASE_PORT	Port of the EHMS HOST database host server	<b>export ENTITY_EHMS_DATABASE_PORT=1521</b>
	ENTITY_EHMS_DATABASE_SID	EHMS Host database	<b>export ENTITY_EHMS_DATABASE_SID=obd</b>

		Service Name	<b>xdb.in.oracle.com</b>
<b>ENTITY_EHMS_DBA_DIRECTORY_NAME</b>	Oracle Directory name in which you want the EHMS (HostInterface) schema datafile (dbf).  Enter only the name and NOT the path		<b>export ENTITY_EHMS_DBA_DIRECTORY_NAME=TBS_DIR</b>
<b>ENTITY_EHMS_DATABASE_SYS_USER</b>	Username with 'sys' privileges		<b>export ENTITY_EHMS_DATABASE_SYS_USER=sys</b>
<b>ENTITY_EHMS_DATABASE_SYS_PASS</b>	Password for EHMS sys user		<b>export ENTITY_EHMS_DATABASE_SYS_PASS=devops@sys</b>
<b>ENTITY_EHMS_SCHEMA_NAME</b>	Complete EHMS (HostInterface) schema name you want installer to create as new schema.		<b>export ENTITY_EHMS_SCHEMA_NAME=OBDXEHMS</b>
<b>ENTITY_EHMS_SCHEMA_PASS</b>	Password for new EHMS schema on EHMS HOST database		<b>export ENTITY_EHMS_SCHEMA_PASS=devops#ehms</b>
<b>ENTITY_EHMS_HOST_SCHEMA_NAME</b>	EXISTING EHMS Host schema name		<b>export ENTITY_EHMS_HOST_SCHEMA_NAME=EHMSHOST</b>
<b>ENTITY_EHMS_HOST_SCHEMA_NAME_PASS</b>  <b>**This parameter is only required for UBS &amp; OBPM Host</b>	Password of existing HOST EHMS schema (Existing)		<b>export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=ehmshst</b>
<b>WLS_DOMAIN_PASS</b>	Password for Weblogic admin console		<b>export WLS_DOMAIN_PASS=weblogic182</b>
<b>ENTITY_EHMS_CCY</b>	Country Code for		<b>export ENTITY_EHMS_CCY=GB</b>

	<b>**This parameter is only required for UBS &amp; OBPM Host</b>	new or additional entity home branch	
	<b>ENTITY_EHMS_FCORE_FCUBS_SCHEMA_NAME</b>  <b>**This parameter is only required for FCORE</b>	FCORE-FCUBS HOST schema name	<b>export ENTITY_EHMS_FCORE_FCUBS_SCHEMA_NAME=FCRUBSHOST</b>
<b>Environment variables to set for flavor:</b>  <b>OBDX (Third-party HOST)</b>	<b>Entity_Code</b>	Entity code which has been entered from screen	<b>export Entity_Code=OBDX_BU1</b>
	<b>SCHEMA_PASS</b>	Password for existing OBDX schema	<b>export SCHEMA_PASS=welcome1</b>

- Run the runInstaller.py file with '--silent' argument along with '--addEntity'

```
[devops@ /]$
[devops@ /]$ export Entity_Code=OBDX_BU7
[devops@ /]$ export SCHEMA_PASS=devops#obdx182
[devops@ /]$ export ENTITY_EHMS_DATABASE_HOSTNAME=mumaa012.in.oracle.com
[devops@ /]$ export ENTITY_EHMS_DATABASE_PORT=1521
[devops@ /]$ export ENTITY_EHMS_DATABASE_SID=obdxdb.in.oracle.com
[devops@ /]$ export ENTITY_EHMS_DBA_DIRECTORY_NAME=TBS_DIR
[devops@ /]$ export ENTITY_EHMS_DATABASE_SYS_USER=sys
[devops@ /]$ export ENTITY_EHMS_DATABASE_SYS_PASS=devops@sys
[devops@ /]$ export ENTITY_EHMS_SCHEMA_NAME=OBDXEHMS
[devops@ /]$ export ENTITY_EHMS_SCHEMA_PASS=devops#ehms
[devops@ /]$ export ENTITY_EHMS_HOST_SCHEMA_NAME=FCUBS140
[devops@ /]$ export ENTITY_EHMS_HOST_SCHEMA_NAME_PASS=FCUBS140HST
[devops@ /]$ export WLS_DOMAIN_PASS=weblogic182
[devops@ /]$ export ENTITY_EHMS_CCY=GB
[devops@ /]$ python runInstaller.py --silent --addEntity
```

## Installation Status in case of Oracle FLEXCUBE Core Banking, Oracle FLEXCUBE Universal Banking, Oracle FLEXCUBE Universal Banking with Oracle Banking Payments

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

```
@obdxwls/scratch/obdx/OBDX_Installer
Execution of uba_object_scripts.sql completed
Execution of execute-seeds.sql started
Execution of execute-seeds.sql completed
SUCCESSFULLY installed UBS141 database
Executed DIGX_FW_CONFIG_ALL_O.sql successfully

Starting Entity Configuration

Calling WLST

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://obdxwls.in.oracle.com:9001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX183INS".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Creating Data source OBDX_BUI_B1A1
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDX_BUI_B1A1 created successfully.

Exiting WebLogic Scripting Tool.

Entity successfully configured.
```

When the installation completes, the below message is displayed

```
@obdxwls/scratch/obdx/OBDX_Installer
Execution of uba_object_scripts.sql completed
Execution of execute-seeds.sql started
Execution of execute-seeds.sql completed
SUCCESSFULLY installed UBS141 database
Executed DIGX_FW_CONFIG_ALL_O.sql successfully

Starting Entity Configuration

Calling WLST

Initializing WebLogic Scripting Tool (WLST) ...

Welcome to WebLogic Server Administration Scripting Shell

Type help() for help on available commands

Connecting to t3://obdxwls.in.oracle.com:9001 with userid weblogic ...
Successfully connected to Admin Server "AdminServer" that belongs to domain "OBDX183INS".

Warning: An insecure protocol was used to connect to the server.
To ensure on-the-wire security, the SSL port or Admin port should be used instead.

Location changed to edit tree.
This is a writable tree with DomainMBean as the root.
To make changes you will need to start an edit session via startEdit().
For more help, use help('edit').

Creating Data source OBDX_BUI_B1A1
Starting an edit session ...
Started edit session, be sure to save and activate your changes once you are done.
Activating all your changes, this may take a while ...
The edit lock associated with this edit session is released once the activation is completed.
Activation completed
OBDX_BUI_B1A1 created successfully.

Exiting WebLogic Scripting Tool.

Entity successfully configured.
```

Post successful installation refer to “Section 8: Post Installation steps” for manual steps to be performed for

- UBS additional entity (sub-section : Oracle FLEXCUBE Universal Banking Solution (OBDX with UBS))
- OBPM additional entity (sub-section: Oracle FLEXCUBE Universal Banking with Oracle Banking Payments (OBDX with OBPM))

### **Installation Status in case of other hosts as Add Entity**

After entering all required details, the status is displayed (as shown below) on the terminal to indicate the progress of the installation.

- THP(third party as entity)

```
[Gevopa@ ~]$ python runInstaller.py --silent --addEntity
Password validated for OBDX_1831NS
Execution of DB script for OBDX_BUI started
Executed DIOX_FW_CONFIG_ALL_0.sql successfully
Execution completed.
```

[Home](#)

## 13. OBDX Product Security

Refer below document for OBDX product security configuration

Oracle Banking Digital Experience Security Guide

[Home](#)

## 14. OBDX Product – Best Practice

### 14.1 Tablespace for AUDIT INDEX

The index's used by AUDIT table should be moved into new tablespace from current AUDIT tablespace.

Follow below steps

- Create a new tablespace
- Give quota to OBDX schema

```
alter user <OBDX_SCHEMA> quota unlimited on <OBDX_AUDIT_INDEX_TABLESPACE>;
```

- Drop and create below index by mapping the newly created tablespace
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\IDX\_DIGX\_AL\_API\_AUDIT\_LOGGING.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\IDX\_DIGX\_AL\_API\_AUDIT\_LOG\_HIST.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\IDX\_DIGX\_AL\_AUDIT\_LOGGING.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\ IDX\_DIGX\_AL\_AUDIT\_LOGGING\_1.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\ IDX\_DIGX\_AL\_AUDIT\_LOGGING\_2.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\ IDX\_DIGX\_AL\_AUDIT\_LOGGING\_3.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\ IDX\_DIGX\_AL\_AUDIT\_LOGGING\_4.sql
  - OBDX\_Installer\installables\db\OBDX\ddl\oracle\audit\IDX\_DIGX\_AL\_AUDIT\_LOGGING\_DETA ILS.sql

## 15. JPA and OBDX multi-cluster

In a multi-cluster environment, below JPA related changes should be implemented

- Go to Weblogic server
- Open config\META-INF\persistence.xml
- Append below configuration for all data-source

```
<property name="eclipselink.cache.coordination.jms.host" value="t3://<WEBLOGIC-HOST-NAME OR IP>:<MANAGED-SERVER-PORT>/" />
```

Replace with respective hostname or IP and Port no (this should be the managed server port number which hosts the JPA queues in the cluster)

Key pointers;

- Multi-cluster here refer's to :
  - Single cluster with multiple nodes (2 or more physical servers hosting the OBDX product)
  - 2 or more Weblogic cluster's
- Ensure these (persistence.xml) changes are available to all Managed server by maintaining appropriate classpath




## 16. Troubleshoot Overview

This section describes how to troubleshoot OBDX setup.

### Invalid database password

This topic contains troubleshooting information if you receive an error when attempting to connect to the database server.

If you get the following error:

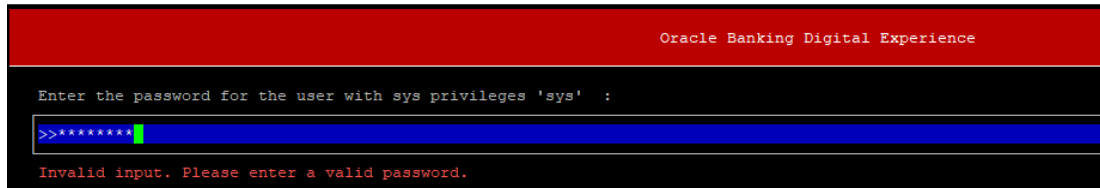

```

Oracle Banking Digital Experience

Enter the password for the user with sys privileges 'sys' :
>>*****
Invalid input. Please enter a valid password.

```


Try one of the following:

- Verify that the database is running.
- Check Network connectivity between Weblogic Server and Database server.
- Check the database configuration in installer.properties file
- Verify that the entered password is correct.

### cx\_oracle module

This topic contains troubleshooting information about problems with cx\_Oracle python module.

If you get the following error:

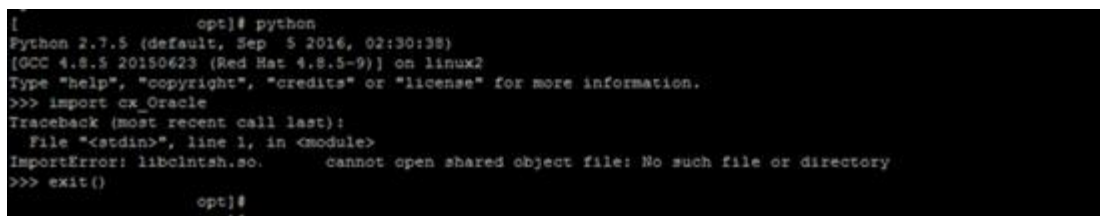

```

[opt]# python
Python 2.7.5 (default, Sep 5 2016, 02:30:38)
[GCC 4.8.5 20150623 (Red Hat 4.8.5-9)] on linux2
Type "help", "copyright", "credits" or "license()" for more information.
>>> import cx_Oracle
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ImportError: libclntsh.so. cannot open shared object file: No such file or directory
>>> exit()

[opt]#

```

Execute the below command:

```
export LD_LIBRARY_PATH=/usr/lib/oracle/18.3/client64/lib:$LD_LIBRARY_PATH
python
import cx_Oracle
cx_Oracle.__version__
```

```
[devops@ /]$ export LD_LIBRARY_PATH=/usr/lib/oracle/18.3/client64/lib:$LD_LIBRARY_PATH
[devops@ /]$ python
Python 2.7.5 (default, Apr 11 2018, 17:41:36)
[GCC 4.8.5 20150623 (Red Hat 4.8.5-28.0.1)] on linux2
Type "help", "copyright", "credits" or "license" for more information.
>>> import cx_Oracle
>>> cx_Oracle.__version__
'7.3.0'
```

### **Failed Database Scripts**

This topic contains troubleshooting information in case of database script failures.

If you get the following error in DB\_installation.log:

```
2017-07-13 13:45:41,051 DEBUG Executed /scratch/jenkins/OBDX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTFORMATS.sql successful
2017-07-13 13:45:41,081 DEBUG Executed /scratch/jenkins/OBDX_Installer/ExecInstances/13Jul1338/db/UBS/seed/mstdevice.sql successful
2017-07-13 13:45:41,747 DEBUG Executed /scratch/jenkins/OBDX_Installer/ExecInstances/13Jul1338/db/UBS/seed/MSTENTITYUSERYPELANG.sql successful
2017-07-13 13:45:41,796 ERROR Executed /scratch/jenkins/OBDX_Installer/ExecInstances/13Jul1338/db/UBS/seed/mstlang.sql failed
```

Check the detailed log of the failed SQL file at <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM> /logs/db folder.

### **Failure of Policy Seeding**

This topic contains troubleshooting information if policy seeding fails during installation.

If you get the following error:

```
Policy seeding failed. Please see logs for more details
```

Try one of the following:

Check if Entitlement.log is created on following path <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Entitlement policy seeding.

Check if Task.log is created on following path <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Task policy seeding.

Check if Dashboard\_seed.log is created on following path <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ and contains any SEVERE errors for Dashboard policy seeding.

- Check the seedPolicies.log in <OBDX INSTALLER DIR>/ExecInstances/<DDMonthHHMM>/logs/db/ directory if it contains any runtime errors generated during execution of the policies Seeding in OBDX schema

Fix the problem by following below steps:

- Login to OBDX installer server
- Over-write the policies files (Day0Policy.csv; Entitlement.csv; Resources.csv and Task.csv) from OBDX Product zip into <OBDX INSTALLER DIR>/installables/policies directory
- Browse to <OBDX INSTALLER DIR>\installables\policies
- Edit Entitlement\_log4j.properties , Task\_log4j.properties & Dashboard\_seed\_log4j.properties . Replace <logs\_path> with directory where policy seeding logs will be generated

e.g

```

#####
# default file output is in user's home directory.
#java.util.logging.FileHandler.pattern = %h/java%.log
java.util.logging.FileHandler.pattern = <logs_path>/Task.log
java.util.logging.FileHandler.limit = 50000
java.util.logging.FileHandler.count = 1
#java.util.logging.FileHandler.formatter = java.util.logging.XMLFormatter
java.util.logging.FileHandler.formatter = java.util.logging.SimpleFormatter
java.util.logging.SimpleFormatter.format= [%1$tc] %4$s: %2$s - %5$s %6$s%n

# Limit the message that are printed on the console to INFO and above.
java.util.logging.ConsoleHandler.level = OFF
java.util.logging.ConsoleHandler.formatter = java.util.logging.SimpleFormatter

#####
# default file output is in user's home directory.
#java.util.logging.FileHandler.pattern = %h/java%.log
java.util.logging.FileHandler.pattern = /scratch/Task.log
java.util.logging.FileHandler.limit = 50000
java.util.logging.FileHandler.count = 1
#java.util.logging.FileHandler.formatter = java.util.logging.XMLFormatter
java.util.logging.FileHandler.formatter = java.util.logging.SimpleFormatter
java.util.logging.SimpleFormatter.format= [%1$tc] %4$s: %2$s - %5$s %6$s%n
    
```

- Run below command manually if “SEVERE” error logs are found in Task.log

```

java -jar -Djava.util.logging.config.file='<logs.properties>' com.ofss.digx.utils.feed.data.task.jar "Task.csv"
"oracle.jdbc.OracleDriver,<OBDX Schema name>,<OBDX Schema password>,jdbc:oracle:thin:@<OBDX
DB hostname or IP>:<OBDX DB listener port>/<OBDX Service Name>"
    
```

for e.g.:

```

java -jar -Djava.util.logging.config.file='Task_log4j.properties' com.ofss.digx.utils.feed.data.task.jar
'Task.csv'
"oracle.jdbc.OracleDriver,OBDX_THP181>Welcome#1,jdbc:oracle:thin:@10.44.169.255:1521/OBDX"
    
```

- Run below command manually if “SEVERE” error logs are found in Entitlement.log

```
java -jar -Djava.util.logging.config.file='<logs.properties>' com.ofss.digx.utils.entitlement.feed.data.jar
'Resources.csv, Entitlement.csv, Day0Policy.csv' 'KERNEL' "oracle.jdbc.OracleDriver,<OBDX Schema
name>,<OBDX Schema password>,jdbc:oracle:thin:@<OBDX DB hostname or IP>:<OBDX DB listener
port>/<OBDX Service Name>"
```

for e.g.:

```
java -jar -Djava.util.logging.config.file='Entitlement_log4j.properties'
com.ofss.digx.utils.entitlement.feed.data.jar "Resources.csv, Entitlement.csv, Day0Policy.csv" 'KERNEL'
"oracle.jdbc.OracleDriver,OBDX_THP181,Welcome#1,jdbc:oracle:thin:@10.44.169.255:1521/OBDX"
```

- Run below command manually if “SEVERE” error logs are found in Dashboard\_seed.log

```
java -jar -Djava.util.logging.config.file='<logs.properties>' com.ofss.digx.utils.dashboard.jar '<path>/
dashboard_json' "oracle.jdbc.OracleDriver,<OBDX Schema name>,<OBDX Schema
password>,jdbc:oracle:thin:@<OBDX DB hostname or IP>:<OBDX DB listener port>/<OBDX Service
Name>"
```

for e.g.:

```
java -jar -Djava.util.logging.config.file= Dashboard_seed_log4j.properties'
com.ofss.digx.utils.dashboard.jar '/installables/policies/dashboard_json'
"oracle.jdbc.OracleDriver,OBDX_THP181,Welcome#1,jdbc:oracle:thin:@10.44.169.255:1521/OBDX"
```

- Post successfully execution, restart Managed server.

[Home](#)