

# JD Edwards EnterpriseOne Tools

---

## **Messaging Queue Adapter Configuration Guide for WebSphere MQ on IBM i**

9.2

Part Number: E64146-05

Copyright © 2011, 2023, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

<b>Preface</b>	<b>i</b>
<hr/>	
<b>1 Introduction</b>	<b>1</b>
Introduction	1
Accessing Minimum Technical Requirements	1
Creating Outbound IBM WebSphere MQ Queues For Real-Time Events	2
<b>2 Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only</b>	<b>3</b>
<hr/>	
Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only	3
Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only: Step 1	3
Configuring the JD Edwards EnterpriseOne Server Components	4
Communicating Between Systems - Starting Up Channels And Listeners	8
<b>3 Configuring the Server jde.ini File for Z Events Only</b>	<b>11</b>
<hr/>	
Configuring the Server jde.ini File for Z Events Only	11
Configuring the Server jde.ini File for Z Events Only: Step 2	11
<b>4 Setting Up UBE Queues for Z Events Only</b>	<b>13</b>
<hr/>	
Setting Up UBE Queues for Z Events Only	13
Setting Up UBE Queues for Z Events Only: Step 3	13
<b>5 Configuring the Interoperability Features for Z Events Only</b>	<b>15</b>
<hr/>	
Configuring the Interoperability Features for Z Events Only	15
Configuring the Interoperability Features for Z Events Only: Step 4	15
Setting Up Flat File Cross-Reference	16
Setting Up Data Export Controls	16
Setting Up the Sales Order Entry Application	18
Configuring the Address Book Revisions Application	18
Configuring the Address Book Master Business Function	19

<b>6</b>	<b>Configuring the Job Description</b>	<b>21</b>
	Configuring the Job Description	21
	Configuring the Job Description: Step 5	21
<b>7</b>	<b>Restarting Services</b>	<b>23</b>
	Restarting Services	23
	Restarting Services: Step 6	23
<b>8</b>	<b>Running the R00460 Subsystem for WebSphere MQ for Z Events Only</b>	<b>25</b>
	Running the R00460 Subsystem for WebSphere MQ for Z Events Only	25
	Starting the R00460 Subsystem	25
	Viewing Subsystems Running on a Server	26
	Terminating Subsystems	26
	Verifying Event Delivery	27

# Preface

Welcome to the JD Edwards EnterpriseOne documentation.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Related Information

For additional information about JD Edwards EnterpriseOne applications, features, content, and training, visit the JD Edwards EnterpriseOne pages on the JD Edwards Resource Library located at:

<http://learnjde.com>

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>Bold</b>	Boldface type indicates graphical user interface elements associated with an action or terms defined in text or the glossary.
<i>Italics</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<b>Monospace</b>	Monospace type indicates commands within a paragraph, URLs, code examples, text that appears on a screen, or text that you enter.
<b>&gt; Oracle by Example</b>	Indicates a link to an Oracle by Example (OBE). OBEs provide hands-on, step-by-step instructions, including screen captures that guide you through a process using your own environment. Access to OBEs requires a valid Oracle account.



# 1 Introduction

## Introduction

Oracle's JD Edwards EnterpriseOne Adapter for IBM WebSphere MQ enables you to connect third-party applications to JD Edwards EnterpriseOne by sending and receiving messages through IBM's WebSphere MQ messaging system. The adapter monitors an inbound queue for request and reply messages, performs the requested services, and places the results on outbound queues. The adapter also monitors the system for certain activities and publishes the results in an outbound message queue. All messages transported through IBM WebSphere MQ are in the form of XML documents.

The purpose of this document is to describe the configuration and operation of the adapter. A separate document, the *JD Edwards EnterpriseOne Tools Interoperability Guide*, in the chapter "Understanding Messaging Queue Adapters" explains the design of the adapter, the formats of the documents, and the tasks necessary to create, modify, and process the XML documents in the Events chapters.

The JD Edwards EnterpriseOne Adapter for IBM WebSphere MQ is a JD Edwards EnterpriseOne product that can be licensed and installed independently. You use this adapter to connect the JD Edwards EnterpriseOne system with any system that can implement the IBM WebSphere MQ messaging protocols, including IBM WebSphere Commerce Suite (WCS), and that can produce and consume XML documents in the prescribed formats. The JD Edwards EnterpriseOne Adapter for IBM WebSphere MQ exports and imports XML documents through IBM WebSphere MQ in the prescribed formats.

The following three operations are supported:

1. Inbound transactions through calling BSFNs
2. Outbound Z events delivery through setting up EnterpriseOne Z events mechanism.

The remaining guide applies only to inbound and outbound using Z events.

3. Outbound Real-Time events delivery through setting up EnterpriseOne Real-Time events mechanism.

## Accessing Minimum Technical Requirements

Customers must conform to the supported platforms for the release as detailed in the JD Edwards EnterpriseOne Minimum Technical Requirements. In addition, JD Edwards EnterpriseOne may integrate, interface, or work in conjunction with other Oracle products. Refer to the following link for cross-reference material in the Program Documentation for Program prerequisites and version cross-reference documents to assure compatibility of various Oracle products: <http://www.oracle.com/corporate/contracts/index.html>

Access the current Minimum Technical Requirement (MTR) document (Document ID 745831.1) posted on My Oracle Support.


<https://support.oracle.com/rs?type=doc&id=745831.1>

# Creating Outbound IBM WebSphere MQ Queues For Real-Time Events

If you are interested in receiving real-time events, real-time event queues must be created. The real-time event queue does not need to be created if you are not interested in receiving real-time events.

See *"Creating an MSMQ Real-Time Event Queue"* in the *JD Edwards EnterpriseOne Tools Interoperability Guide*.

This illustration shows the JD Edwards EnterpriseOne server with the IBM WebSphere MQ adapter:

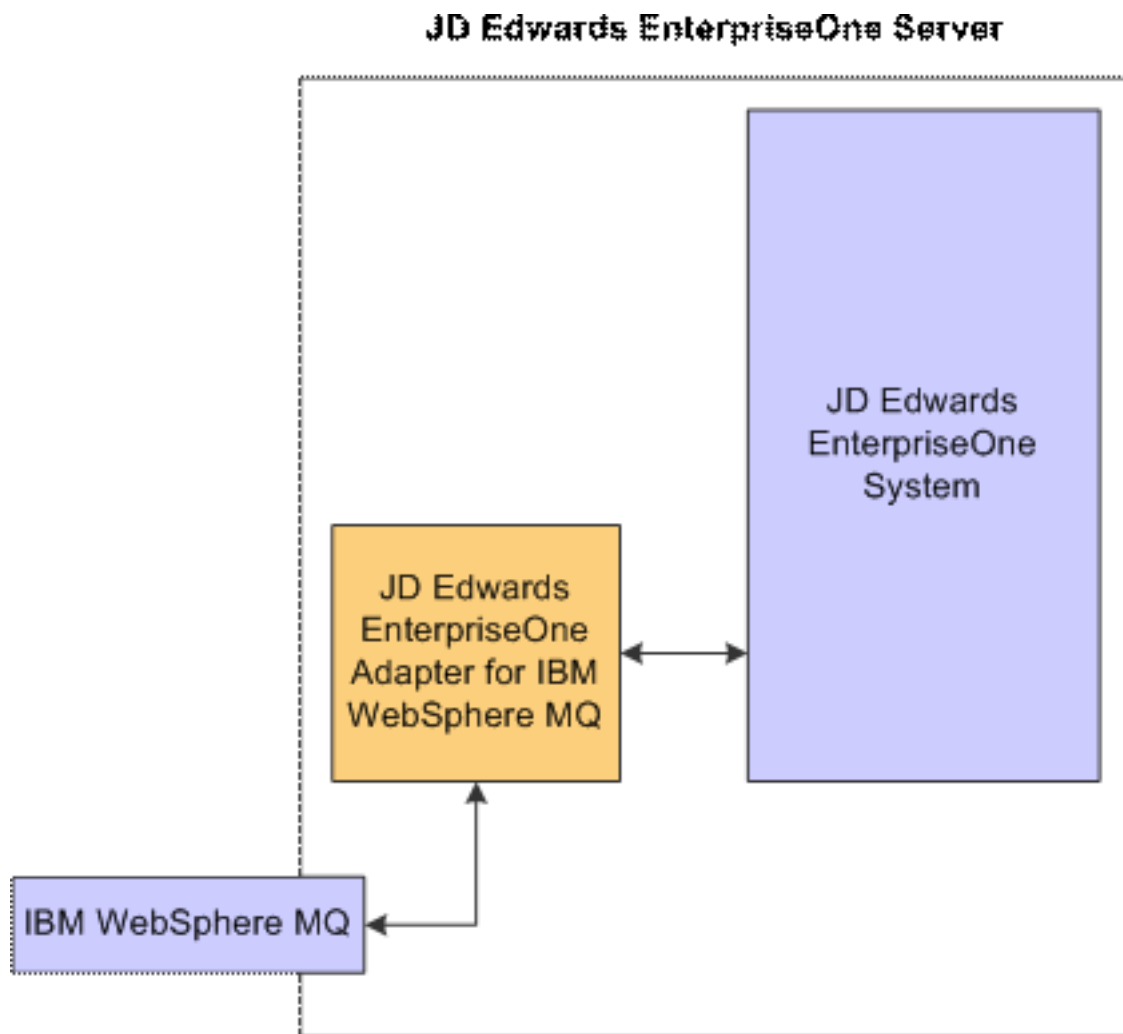

## Prerequisites

Verify that your system meets the minimum technical requirements (MTRs) to support message queuing.



## 2 Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only

### Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only

IBM WebSphere MQ is a queue messaging system that requires a sender and receiver relationship. One side of IBM WebSphere MQ is installed on Oracle's JD Edwards EnterpriseOne server while the related side is installed on another physical or logical machine. The setup on the JD Edwards EnterpriseOne server enables JD Edwards EnterpriseOne to receive inbound messages from a third-party application or system and to place outbound messages in a queue for processing by a third-party application or system. Refer to the applicable IBM documentation for instructions on installing IBM WebSphere MQ on other machines.

### Setting Up Inbound and Outbound WebSphere MQ Queues for Z Events Only: Step 1

The procedures described in this section assume you have already installed the IBM product WebSphere MQ onto your JD Edwards EnterpriseOne server.

You must set up your JD Edwards EnterpriseOne server so that the system can receive inbound messages from a third-party application or system and then place responses, in the form of outbound messages, in a queue for processing by the third-party application or system.

In addition to information about setting up your JD Edwards EnterpriseOne server, this section also provides examples for communicating between the JD Edwards EnterpriseOne server and a third-party server.

#### Prerequisites

On your iSeries system, you must remove QMQM from the system value QSYSLIBL. After that you must issue a subsystem call with a qualified library name, which is required because the subsystem must be up and running before you can proceed with any other queue manager instructions. Type this command:

```
STRSBS QMQM/QMQM
```

Also, you must use one of these commands to change your user preferences:

```
CHGUSRPRF USRPRF(EnterpriseOne) GRPPRF(QMQMADM)
```

or

```
CHGUSRPRF USRPRF(EnterpriseOne) SUPGRPPRF(QMQMADM)
```

# Configuring the JD Edwards EnterpriseOne Server Components

## Inbound to JD Edwards EnterpriseOne and Outbound to a Third-Party System

You set up your JD Edwards EnterpriseOne server so that the system can receive an inbound message from a third-party system or application and respond by placing an outbound message in the outbound queue. Complete these tasks:

- Create the WebSphere MQ Queue Manager.
- Start the WebSphere MQ Queue Manager.
- Create MQ local queues.
- Create a MQ remote queue.
- Create a MQ local sender channel.
- Create a MQ local receiver channel.
- Grant authority to all queues and channels.
- Reset a channel.

**CAUTION:** The names of queues and channels in IBM WebSphere MQ are case-sensitive. Be sure to use capital letters as specified in this document. You can specify any name for a queue or channel. However, it is important that the queue names you create match the queue names you specify in the jde.ini file on the JD Edwards EnterpriseOne server.

### To create the IBM WebSphere MQ Queue Manager

On the JD Edwards EnterpriseOne server, create the IBM WebSphere MQ Queue Manager by issuing this command from the iSeries Command Entry command line:

```
CRTMQM MQMNAME(JDE_QMGR) TEXT('JD Edwards queue manager') DFTQMGR(*YES)
```

### To start the IBM WebSphere MQ Queue Manager

1. On the JD Edwards EnterpriseOne server, start the IBM WebSphere MQ Queue Manager by issuing this command on the command line:

```
STRMQM MQMNAME(JDE_QMGR)
```

2. The display returns this:

```
Ownership of object QXCSGLOBAL in QTEMP type *USRSPC changed.  
Ownership of object QXCSGLOBAL in QTEMP type *USRSPC changed.  
Ownership of object QXSA455240 in QMQMDATA type *USRQ changed.  
Ownership of object QXSA455240 in QMQMDATA type *USRQ changed.  
Ownership of object QMQMLOCAL in QTEMP type *USRSPC changed.  
Ownership of object QMQMLOCAL in QTEMP type *USRSPC changed.  
Ownership of object QXSA00021 in QMQMDATA type *USRSPC changed.  
Ownership of object QXSA00021 in QMQMDATA type *USRSPC changed.  
Ownership of object QXSA00022 in QMQMDATA type *USRSPC changed.  
Ownership of object QXSA00022 in QMQMDATA type *USRSPC changed.  
Ownership of object QXSA00023 in QMQMDATA type *USRSPC changed.
```

```

Ownership of object QXSA00024 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00024 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00025 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00025 in QMQMDATA type *USRSPC changed.
Ownership of object QXSZ00006 in QMQMDATA type *USRQ changed.
Ownership of object QXSZ00006 in QMQMDATA type *USRQ changed.
Ownership of object QXSA00026 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00026 in QMQMDATA type *USRSPC changed.
Ownership of object QXSZ00007 in QMQMDATA type *USRQ changed.
Ownership of object QXSZ00007 in QMQMDATA type *USRQ changed.
Ownership of object QXSB00005 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00027 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00027 in QMQMDATA type *USRSPC changed.
Ownership of object QXSZ00008 in QMQMDATA type *USRQ changed.
Ownership of object QXSZ00008 in QMQMDATA type *USRQ changed.
Ownership of object QXSA00028 in QMQMDATA type *USRSPC changed.
Ownership of object QXSA00028 in QMQMDATA type *USRSPC changed.
11 entries received from journal AMQAJRN in QUSRSYS.
Ownership of object QXLEQ00001 in QMQMDATA type *USRQ changed.
Ownership of object QXLEQ00001 in QMQMDATA type *USRQ changed.
Object QXSX455240 in QMQMDATA type *USRQ deleted.
Message Queue Manager started
    
```

## To create MQ local queues

You must create these local queues:

- INBOUND.Q
- SUCCESS.Q
- ERROR.Q
- DEFRES.Q
- OUTBOUND.Q.XMIT

Access the JD Edwards EnterpriseOne server.

### 1. To change the default local queue, enter this command on the command line:

```

CHGMQM QNAME (SYSTEM.DEFAULT.LOCAL.QUEUE) QTYPE (*LCL)
TEXT ('Default local queue') PUTENBL (*YES) DFTPTY (9)
DFTMSGPST (*YES) PRCNAME (*NONE) TRGENBL (*NO) GETENBL (*YES)
SHARE (*YES) DFTSHARE (*YES) MSGDLYSEQ (*FIFO) HDNBKTCNT (*YES)
TRGTYPE (*NONE) TRGDEPTH (1) TRGMSGPTY (0) TRGDATA (*NONE)
RTNITV (999999999) MAXDEPTH (64000) MAXMSGLEN (4194304)
BKTTHLD (0) BKTQNAME (*NONE) INITQNAME (*NONE) USAGE (*NORMAL)
HIGHTHLD (100) LOWTHLD (0) FULLEVT (*YES) HIGHEVT (*YES)
LOWEVT (*YES) SRVITV (999999999) SRVEVT (*NONE) DISTLIST (*NO)
    
```

### 2. To create the local queues, enter these IBM WebSphere MQ commands:

```

CRTMQMQ QNAME (INBOUND.Q) QTYPE (*LCL)
TEXT ('JD Edwards EnterpriseOne inbound queue')
PUTENBL (*YES) DFTPTY (9) DFTMSGPST (*YES)

CRTMQMQ QNAME (SUCCESS.Q) QTYPE (*LCL)
TEXT (' JD Edwards EnterpriseOne success queue')
PUTENBL (*YES) DFTPTY (9) DFTMSGPST (*YES)

CRTMQMQ QNAME (ERROR.Q) QTYPE (*LCL)
TEXT (' JD Edwards EnterpriseOne error queue')
PUTENBL (*YES) DFTPTY (9) DFTMSGPST (*YES)
    
```

```
CRTMQMQ QNAME(DEFRES.Q) QTYPE(*LCL)
TEXT(' JD Edwards EnterpriseOne default response queue')
PUTENBL(*YES) DFTPTY(9) DFTMSGPST(*YES)

CRTMQMQ QNAME(OUTBOUND.Q.XMIT) QTYPE(*LCL)
TEXT(' JD Edwards EnterpriseOne inbound queue')
PUTENBL(*YES) DFTPTY(9) DFTMSGPST(*YES)
USAGE(*TMQ)
```

## To create the MQ remote queue

Access the JD Edwards EnterpriseOne server.

1. To change the default remote queue, enter this command on the command line:

```
CHGMQM QNAME(SYSTEM.DEFAULT.REMOTE.QUEUE)
QTYPE(*RMT)
TEXT('Default remote queue') PUTENBL(*YES)
DFTPTY(9) DFTMSGPST(*YES) TMQNAME(*NONE)
RMTQNAME(' ') RMTMQNAME(' ')
```

2. To create the live remote queue, enter this command:

```
CRTMQMQ QNAME(OUTBOUND.Q) QTYPE(*RMT)
TEXT('JD Edwards EnterpriseOne outbound queue to NC system')
TMQNAME(OUTBOUND.Q.XMIT) RMTQNAME(ECE_IN2MQI)
RMTMQNAME(ECE_MQI_QMGR)
```

**Note:** ECE\_IN2MQI is the third-party remote queue name and ECE\_MQI\_QMGR is the third-party queue manager name.

## To create a MQ local sender channel

Access the JD Edwards EnterpriseOne server.

1. To change the default local sender channel, enter this command on the command line:

```
CHGMQMCHL CHLNAME(SYSTEM.DEF.SENDER)
CHLTYPE(*SDR ) TRPTYPE(*TCP)
TEXT('Default Sender channel') CONNAME(' ')
TMQNAME(' ') BATCHSIZE(9999) DSCITV(0)
SHORTTMR(999999999) SHORTRTY(999999999)
LONGTMR(999999999) SCYEXIT(*NONE)
SCYUSRDATA(*NONE) SNDEXIT(*NONE)
SNDUSRDATA(*NONE) RCVEXIT(*NONE)
RCVUSRDATA(*NONE) MSGEXIT(*NONE)
MSGUSRDATA(*NONE) SEQNUMWRAP(999999999)
MAXMSGLEN(4194304) CVTMSG(*NO)
HRTBTINTVL(999999) NPMSPEED(*FAST)
```

2. To create the live local sender channel, enter this command{

```
CRTMQMCHL CHLNAME(OW2MQI_CHL) CHLTYPE(*SDR )
TRPTYPE(*TCP) TEXT('Sender channel to NC system')
CONNAME('NC Server Name') TMQNAME(OUTBOUND.Q.XMIT)
```

## To create an MQ local receiver channel

Access the JD Edwards EnterpriseOne server.

1. To change the default local receiver channel, enter this command on the command line:

```
CHGMQMCHL CHLNAME(SYSTEM.DEF.RECEIVER)
CHLTYPE(*RCVR) TRPTYPE(*TCP)
```

```
TEXT('Default Receiver channel') BATCHSIZE(9999)
SCYEXIT(*NONE) SCYUSRDATA(*NONE) SNDEXIT(*NONE)
SNDUSRDATA(*NONE) RCVEXIT(*NONE)
RCVUSRDATA(*NONE) MSGEXIT(*NONE)
MSGUSRDATA(*NONE) PUTAUT(*DFT)
SEQNUMWRAP(999999999) MAXMSGLEN(4194304)
HRTBTINTVL(999999) NPMSPEED(*FAST)
```

2. To create the live local receiver channel, enter this command:

```
CRTMQMCHL CHLNAME(MQI2OW_CHL ) CHLTYPE(*RCVR) TRPTYPE(*TCP) TEXT('Receiver channel
from third-party system')
```

### To grant authority to all queues and channels

You need to give authority to JD Edwards EnterpriseOne and to all of the queues and channels.

Access the JD Edwards EnterpriseOne server.

Enter these commands on the command line:

```
GRTMQMAUT OBJ(JDE_QMGR) OBJTYPE(*MQM)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(DEFRES.Q) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(ERROR.Q) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(INBOUND.Q) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(OUTBOUND.Q) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(SUCCESS.Q) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(SYSTEM.DEFAULT.LOCAL.QUEUE) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

```
GRTMQMAUT OBJ(SYSTEM.DEFAULT.REMOTE.QUEUE) OBJTYPE(*Q)
USER(JD Edwards EnterpriseOne) AUT(*ALL)
```

### To reset a channel

If a channel becomes inactive, you can use this command to reset the channel:

```
RSTMQMCHL CHLNAME(channel_name)
```

# Communicating Between Systems - Starting Up Channels And Listeners

You must set up communications between the JD Edwards EnterpriseOne server and the third-party system. This section provides examples for setting up communications. The example communications setup uses these sequenced and machine-dependent steps:

- Start the Queue Manager on the third-party IBM WebSphere MQ server.
- Start the Queue Manager on the JD Edwards EnterpriseOne IBM WebSphere MQ Server.
- Start the channel on the third-party IBM WebSphere MQ Server.
- Start the channel on the JD Edwards EnterpriseOne IBM WebSphere MQ Server.

**Note:** The first time you start your communications channels, you might need to manually start the sender channel on the local machine and then manually start the receiver channel on the remote machine. After the initial start of the channels, the receiver on the remote machine should automatically start when you start the sender on the local machine.

## To start the queue manager on the third-party WebSphere MQ server

Access the third-party WebSphere MQ server.

1. At a DOS prompt, enter this command to start the Queue Manager:

```
STRMQM MQMNAME (ECE_MQI_QMGR)
```

2. At the DOS prompt, enter this command to start the listener:

```
start/min runmqclsr -m ECE_MQI_QMGR -t TCP
```

This action creates a minimized DOS prompt window. Do not close this window.

**Note:** ECE\_MQI\_QMGR is the third-party queue manager name.

## To start the queue manager on the JD Edwards EnterpriseOne IBM WebSphere MQ server

Access the JD Edwards EnterpriseOne IBM WebSphere MQ server.

1. Enter this command to start the Queue Manager:

```
STRMQM MQMNAME (JDE_QMGR)
```

2. Enter this command to start the listener:

```
STRMQMLSR
```

## To start the channel on the third-party WebSphere MQ server

Access the third-party IBM WebSphere MQ server, and enter this command at the DOS prompt:

```
START CHANNEL (MQI2OW_CHL)
```

## To start the channel on the JD Edwards EnterpriseOne IBM WebSphere MQ server

Access the JD Edwards EnterpriseOne IBM WebSphere MQ server, and enter this command:

```
STRMQMCHL CHLNAME (OW2MQI_CHL)
```

Alternately, you can create and run a CL script:

```
RUNMQSC ECE_MQI_QMGR  
START CHANNEL (MQI2OW_CHL)  
/*START CHANNEL (OW2MQI_CHL) */  
END
```

**Note:** ECE\_MQI\_QMGR is the third-party queue manager name.





# 3 Configuring the Server jde.ini File for Z Events Only

## Configuring the Server jde.ini File for Z Events Only

**Note:** Make sure that Oracle's JD Edwards EnterpriseOne services are stopped until after you make the requisite changes to the jde.ini file on the JD Edwards EnterpriseOne server.

### Configuring the Server jde.ini File for Z Events Only: Step 2

You must configure the jde.ini member on the JD Edwards EnterpriseOne server with these settings:

Parameter	Description
<b>[SECURITY]</b>	You must have these values set in order for JD Edwards EnterpriseOne to accept messages.
User=JDE	
Password=JDE	
<b>[JDENET_KERNEL_DEF17]</b>	You must update the DEF value to next number. For JD Edwards EnterpriseOne, the value is 17.
krnlName=MQSI Kernel	
dispatchDLLName=MQSADAPT	
dispatchDLLFunction=JDEK_DispatchWebSphere MQProcess	
maxNumberOfProcesses=1	
numberOfAutoStartProcesses=1	<p>This value can be set for 1 through n, where n is the number of processes you have defined. When this value is 1 or more, the MQSI kernel automatically starts when JD Edwards EnterpriseOne is initialized. You must use this setting when you use the IBM WebSphere MQ adapter with JD Edwards EnterpriseOne.</p> <p>If the value of this setting is 0, the MQSI kernel does not automatically start upon initialization of JD Edwards EnterpriseOne.</p>

Parameter	Description
<b>[MQSI]</b>	These settings are for the header information on the message that is required for IBM WebSphere Commerce Integrator
QMGRName=JDE_QMGR QInboundName=INBOUND.Q QErrorName=DEFRES.Q QOutboundName=OUTBOUND.Q	The name of the queues can be any name, but must match the names you specify in the IBM WebSphere MQ queue setup.
TimeoutWaitInterval=15	
MaxBufferLength=100,000	This value is measured in bytes. The maximum value that you can set is 100,000,000. The default value is 100,000. You should not use the maximum value, as this can cause performance issues. You can use the IBM WebSphere MQ tools to determine the average size of a message and then set the MaxBufferLength value based on your needs.
CreateHeader=YES JDEOrderStatusCode=JDESOUT JDECustomerCode=JDEAB JDEItemPriceCode=JDEPRICE JDEItemQtyCode=JDEIL NCOrderStatusCode=JDE.IC.F4201Z1 NCCustomerCode=JDE.IC.F0101Z2 NCProductPriceCode=JDE.IC.F4106NC NCProductQtyCode=JDE.IC.F41021Z1	If you use the adapter without the IBM WebSphere Commerce Integrator, you can specify the create header as equal to No, and you should set the IBM WebSphere Commerce Integrator -specific parameter settings in the MQSI section to blank. This includes the four parameters prefixed by JDE and four parameters prefixed by NC.
AppGroup=NNJDE	
OWHostName=host_name	You must specify a host name. The name you specify is the machine used to create the message to trigger the outbound adapter. This is the server on which JD Edwards EnterpriseOne resides.
CharSet=437	You must specify the 437 character set.

# 4 Setting Up UBE Queues for Z Events Only

## Setting Up UBE Queues for Z Events Only

You must set up at least two UBE queues. Two UBE queues are required because Oracle's JD Edwards EnterpriseOne Adapter for IBM WebSphere MQ relies on the use of a subsystem UBE (R00460). Like all subsystem UBEs, the R00460 operates in a permanent processing mode that consumes the queue in which it runs. No other UBE jobs running on the server can operate in the same queue. As a result, you must define at least two UBE queues where one queue is dedicated to normal UBE processing and the other is dedicated to the JD Edwards EnterpriseOne Adapter for WebSphere MQ subsystem.

## Setting Up UBE Queues for Z Events Only: Step 3

This section describes:

- Creating multiple job queues on the iSeries JD Edwards EnterpriseOne server.
- Modifying the jde.ini on the client machine to submit the UBE subsystem request.

### To create multiple job queues

Use these steps to create additional job queues on the iSeries JD Edwards EnterpriseOne server. You should have already set up at least one QBATCH queue during the initial installation of JD Edwards EnterpriseOne. If you want to create queues for running multiple job queues, then you should repeat this step using a different name for each additional queue. Queues that you set up on the iSeries can be used by JD Edwards EnterpriseOne as soon as the queue is created and running on the server. You are not required to change the jde.ini on the JD Edwards EnterpriseOne server or to restart the instance of JD Edwards EnterpriseOne on the iSeries server.

1. Log on to the iSeries as QSECOFR.
2. Enter these commands:  

```
ADDLIBLE JDEOWGO JDEOW/A98OWMNU
```
3. From the menu, select option 8 - Create Job Queue.

**Note:** To determine the unused sequence number, enter:

```
DSPSBSD SBSD (QBATCH)
```

Select option 6 for the Job Queue Entries and then record an unused sequence number.

### To modify the jde.ini on a client machine to submit the UBE subsystem request

If you submit or start the R00460 subsystem UBE from a JD Edwards EnterpriseOne Microsoft Windows client, you must first temporarily modify that client's jde.ini file. The temporary modification is required so that the client can direct the R00460 subsystem to the appropriate UBE queue name. After the client submits or starts the R00460 subsystem UBE, you must undo the temporary change so that the client can regain access to normal UBE submissions to the server-based UBE queue.

On the client machine from which you want to submit or start the R00460 subsystem UBE, ensure these jde.ini settings are correct:

Parameter	Description
[NETWORK QUEUE SETTINGS]  UBEQueue=	UBEQueue= Defines the name of the local or server-based UBE queue.  If you want the client to start or submit the R00460 subsystem, enter a value that corresponds with the value set by the UBEQueue1= on the JD Edwards EnterpriseOne server.  If you want the client to use the normal server-based UBE processing queue, enter a value that corresponds with the equivalent value for that queue on the JD Edwards EnterpriseOne server.

**CAUTION:** When you modify settings in the jde.ini file on the client machine, you must exit and restart the client machine in order for those changes to become effective.

# 5 Configuring the Interoperability Features for Z Events Only

## Configuring the Interoperability Features for Z Events Only

You can use Z, real-time, or XAPI events to receive transactions from Oracle's JD Edwards EnterpriseOne. To use real-time events, you must set up your system as indicated in the [JD Edwards EnterpriseOne Tools Interoperability Guide](#), and you must set up events as indicated in the [JD Edwards EnterpriseOne Applications Business Interface Reference Guide](#).

Z event outbound processing uses interface table (Z-table) processes supported by JD Edwards EnterpriseOne applications. The outbound processes available to you vary depending on which JD Edwards EnterpriseOne release you use. If you use interface tables for transaction-specific outbound processing, you must perform configuration tasks such as setting up processing options and setting up data export controls.

## Configuring the Interoperability Features for Z Events Only: Step 4

This section provides information about setting up the data export controls and also provides examples for setting up JD Edwards EnterpriseOne applications that support Z event processing. Application examples include the following:

- [Setting Up Flat File Cross-Reference](#)
- [Setting Up Data Export Controls](#)
- [Setting Up the Sales Order Entry Application](#)
- [Configuring the Address Book Revisions Application](#)
- [Configuring the Address Book Master Business Function](#)

**Note:**

- [Introduction to Real-Time Events in JD Edwards EnterpriseOne Applications Business Interface Reference Guide](#)
- Events chapters in the [JD Edwards EnterpriseOne Tools Interoperability Guide](#)

## Setting Up Flat File Cross-Reference

When you enable Z events, you also update the Flat File Cross-Reference (F47002) table. The transaction type that you entered in the processing option maps to table F47002 to determine which interface tables to use to retrieve the information. You use the Flat File Cross-Reference program (P47002) to update table F47002.

### Setting up flat file cross-reference

**Work With Flat File Cross-Reference**

✓ 🔍 + ✖ ⌵ Row ⌵ Form ⚙ Tools ↻ One View

Transaction: JDES00T

Records 1 - 10 > >

Trans	Trans Description	Dir Ind	Dir Ind Description	Record Type	Record Type Description	File Name	Flat File Name
JDES00T	Sales Order Outbound	2	Outbound	1	Header	F4201Z1	
JDES00T	Sales Order Outbound	2	Outbound	2	Detail	F4211Z1	
JDES00T	Sales Order Outbound	2	Outbound	3	Additional Header	F49211Z1	
JDESUGST	WMS Inbound Sugges...	1	Inbound	2	Detail	F4611Z1	
JDEVOUCH	Inbound/Outbound V...	1	Inbound	1	Header	F0411Z1	
JDEVOUCH	Inbound/Outbound V...	1	Inbound	2	Detail	F0911Z1	
JDEVOUCH	Inbound/Outbound V...	1	Inbound	4	Additional Detail	F0911Z1T	
JDEVOUCH	Inbound/Outbound V...	2	Outbound	1	Header	F0411Z3	
JDEVOUCH	Inbound/Outbound V...	2	Outbound	2	Detail	F0911Z4	
JDEWC	Work Center Transact...	1	Inbound	2	Detail	F30006Z1	

Refer to the *JD Edwards EnterpriseOne Applications Data Interface for Electronic Data Interchange Implementation Guide* for instructions on setting up the flat file cross-reference application.

## Setting Up Data Export Controls

You must create a Data Export Control (F0047) record for each transaction type. The record specifies the vendor-specific UBE or function to call to process the transaction. For example, for transaction type JDES00T you must set up a record for each order type that you want to export.

### Setting Up Data Export Controls

From the Navigator, select EnterpriseOne Menus > Order Management > Sales Order Management > Sales Order Advanced & Technical Ops > Sales Interoperability > Data Export Controls.

An alternative way to access the Data Export Controls program is to type P0047 on the Fast Path.

This table shows the values for the Data Export Controls form fields:

Form Element	Description
Trans	The values you specify in this field must match the values you have configured for JD Edwards EnterpriseOne outbound processing in the various JD Edwards EnterpriseOne applications. These are example transaction types:  JDEAB JDEIL JDEPRICE JDESOUT
Or Ty	The values you specify in this field must match the values that are required for your system. For example, for WCS these order types are required:  JDESOUT S4 JDESOUT SO
Seq	1.00
UBE Name	Leave this field blank.
Version	Leave this field blank.
Function Name	MQOutboundNotify
Function Library	MQSNTFY  This function library is the name of the service program for the JD Edwards EnterpriseOne Adapter for IBM WebSphere MQ running on iSeries.
Execute for Add	1
Execute for Upd	1
Execute for Del	1
Execute for Inq	1
Flat File Exp Mode	0
Ext DB Exp Mode	0
Ext API Exp Mode	0
Launch Immediately	1

## Setting Up the Sales Order Entry Application

You set up the JD Edwards EnterpriseOne Sales Order Entry (P4210) program to enable it for interoperability operations.

### To set up the processing options for Sales Order Entry

From the Navigator, select *EnterpriseOne Menus > Order Management > Sales Order Management > Daily Sales Order Management Processing > Sales Order Processing > right-click on Sales Order Detail and then click Values. On Processing Options, select 18-Interop from the 1-Defaults drop-down list.*

**Processing Options**

OK Cancel

✓ ✗

18-Interop

1. Transaction Type JDES00UT

2. Before/After Image Processing 1

Blank = Write after image  
1 = Write Before and After images

1. To define the transaction type, type JDES00UT in the Transaction Type field.
2. To define before or after image processing, enter the appropriate value in the Before/After Image Processing field.
3. Click OK.

## Configuring the Address Book Revisions Application

You set up the JD Edwards EnterpriseOne Address Book Revision (P01012) program to enable it for interoperability operations.

To setup processing options for Address Book Revisions

From the Navigator, select *EnterpriseOne Menus > Foundation Systems > Address Book > Daily Processing > right-click on Address Book Revisions and then select Values. On Processing Options, select the Versions tab.*



1. On Processing Options, type INTOP in the Address Book MBF (P0100041) Version field.
2. Click OK.
3. On Work With Addresses, click Close.

## Configuring the Address Book Master Business Function

You set up the Address Book Master Business Function (P0100041) to enable interoperability operations.

### To set up the processing options for the Address Book Master Business Function

1. Type IV in the Fast Path.
2. On Interactive Versions -- Work With Versions, type P0100041 in the Application field, and then click Find.
3. Select the INTOP version, and then select Processing Options from the Row menu.

If there is not a version called INTOP, select version ZJDE0001 and copy it. Call the new version INTOP and then click OK.

The screenshot shows the 'Processing Options' dialog box with the 'Outbound' tab selected. The dialog has 'OK' and 'Cancel' buttons at the top left, with a green checkmark and a red 'X' icon below them. The 'Outbound' tab is active, showing two configuration fields:

- 1. Transaction Type**: A text box containing 'JDEAB'. Below it, the text reads: 'Blank="No outbound interoperability"' and 'JDEAB=Perform "outbound interoperability"'. The 'Defaults' sub-tab is selected.
- 2. Change Transaction Image**: A text box containing '1'. Below it, the text reads: 'Blank = Write the " after image"' and '1 = Write the " before " and " after image "'.

4. On Processing Options, select the Outbound tab.
5. Type JDEAB in the Transaction Type field.
6. To define before or after image processing, enter the appropriate value in the Before/After Image Processing field.
7. Click OK.
8. Click Close.



# 6 Configuring the Job Description

## Configuring the Job Description

You must configure the job description for Oracle's JD Edwards EnterpriseOne Adapter for the IBM WebSphere MQ kernel that is running on the JD Edwards EnterpriseOne server.

## Configuring the Job Description: Step 5

**Note:** Make sure the system library is included in the library list of the session that you use to run this command. You must rerun this Change Job Description command any time you upgrade your JD Edwards EnterpriseOne service pack release level.

On the JD Edwards EnterpriseOne server, enter this command:

```
CHGJOB JOB(NETJOB) INLLIBL(E900SYS QMQM QGPL QTEMP)
```

where E900SYS is your current JD Edwards EnterpriseOne system code library.



# 7 Restarting Services

## Restarting Services

After you have completed the IBM WebSphere MQ queue setup and the associated configuration tasks, you can restart Oracle's JD Edwards EnterpriseOne services on your iSeries server.

## Restarting Services: Step 6

### To restart the services

Access the JD Edwards EnterpriseOne server.

1. To restart your JD Edwards EnterpriseOne services, enter this command:

```
STRNET
```

2. Verify your library list is set up correctly by performing your typical verification to ensure JD Edwards EnterpriseOne is working properly, for example, PORTTEST.
3. Delete the JDETEMP library.



# 8 Running the R00460 Subsystem for WebSphere MQ for Z Events Only

## Running the R00460 Subsystem for WebSphere MQ for Z Events Only

The R00460 subsystem monitors the MSMQ queues for messages and manages Oracle's JD Edwards EnterpriseOne side of the queues. After the R00460 subsystem is started, you can verify that the subsystem is running. You can also review the job record for the subsystem. After the records have been processed, you must manually terminate the subsystem job.

**CAUTION:** After the records have been processed, instead of ending the job, subsystem jobs look for new data in the data queue. Subsystem jobs run until you terminate them.

**Note:** *"Managing JD Edwards EnterpriseOne Subsystems" in the JD Edwards EnterpriseOne Tools System Administration Guide .*

## Starting the R00460 Subsystem

The R00460 subsystem must be manually started. Usually the system administrator or manager-level user is responsible for this task.

**Note:** Before you start the R00460 subsystem, you should have already updated the jde.ini file on the JD Edwards EnterpriseOne server to point to the new queue.

*From the JD Edwards EnterpriseOne Navigator, select EnterpriseOne Menus > EnterpriseOne Life cycle Tools > Report Management > Batch Versions.*

*An alternate way to access the Batch Versions form is to type BV in the Fast Path.*

### To start the R00460 subsystem

1. On Work With Batch Versions, type R00460 in the Batch Application field, and then select Find.
  - o
2. Select version XJDE0001, and then click Select.
3. On Version Prompting, click Submit.
4. On Report Output Destination, select the destination option for your report, and then click OK.

## Viewing Subsystems Running on a Server

You use Work With Servers to determine which subsystems are currently running or waiting on a particular server. The running subsystems are identified by report number and version.

### To view subsystems running or waiting on a server

From the JD Edwards EnterpriseOne Navigator, select *EnterpriseOne Menus > EnterpriseOne Life Cycle Tools > System Administration Tools > Data Source Management > Work With Servers*. On the Submitted Job Search form, select *Advanced from the form menu*.

1. On Work With Servers, click Find to locate all servers or use the query by example row to locate a specific server.
2. Select the server with which you want to work.
3. From the Row menu, select Subsystem Jobs.
4. On Work With Server Jobs, select one of the following options:

- o Processes

A process is a subsystem that is waiting for work. This is identified by an S (subsystem job) value in the Job Type field.

- o Waiting Jobs

Waiting jobs are report jobs that are queued for a subsystem. This is identified by an R (subsystem record) value in the Job Type field.

All currently running JD Edwards EnterpriseOne subsystems are displayed. The status of each subsystem is shown by codes in the following fields:

- Job Type

This field indicates whether the status is a subsystem record or a subsystem job. Valid values are:

- o R or subsystem record
- o S or subsystem job

- Job Status

- o W - subsystem record waiting
- o P - subsystem record processing
- o E - subsystem record to end the job
- o R - subsystem job running

## Terminating Subsystems

You must manually terminate subsystem jobs. Two methods of termination are available:

- Stopping a subsystem job causes it to terminate after it finishes processing the current record. Additional unprocessed records in the F986113 table will not be processed, and no new records can be written. Essentially



the unprocessed records are lost; that is, the process that initiated the record is not notified that the record was not processed.

- Ending a subsystem job causes it to terminate after processing all of the existing subsystem records. No new records can be written to the F986113 table.

### To stop subsystems

From the JD Edwards EnterpriseOne Navigator, select EnterpriseOne Menus > EnterpriseOne Life Cycle Tools > System Administration Tools > Data Source Management > Work With Servers. On the Submitted Job Search form, select Advanced from the form menu.

1. On Work With Servers, click Find.
2. Select the server in the detail area, and then select Subsystem Jobs from the Row menu.
3. On Work With Subsystems, locate a running subsystem.
4. Select the running subsystem that you want to stop, and then select Stop Subsystem from the Row menu.
5. On End Subsystem Job, click OK.

### To end subsystems

From the JD Edwards EnterpriseOne Navigator, select EnterpriseOne Menus > EnterpriseOne Life Cycle Tools > System Administration Tools > Data Source Management > Work With Servers. On the Submitted Job Search form, select Advanced from the form menu.

1. On Work With Servers, click Find.
2. Select the server in the detail area, and then select Subsystem Jobs from the Row menu.
3. On Work With Subsystems, locate a running subsystem.
4. Select the running subsystem that you want to end, and then select Subsystem Jobs from the Row menu.
5. On End Subsystem Job, click OK.

## Verifying Event Delivery

Once finished with the installation, you should verify the event delivery. Use the IBM WebSphere MQ Explorer to select the queue that you created to receive JD Edwards EnterpriseOne events. Right-click on the queue and select Browse Messages to display the messages.

See *"Verifying Event Delivery" in the Event Delivery* JD Edwards EnterpriseOne Tools Interoperability Guide

