



Documaker

Documaker Server Installation Guide

version 11.2

Skywire Software, L.L.C.
3000 Internet Boulevard
Suite 200
Frisco, Texas 75034
www.skywiresoftware.com

Phone:	(U. S.)	972.377.1110
	(EMEA)	+44 (0) 1372 366 200
FAX:	(U. S.)	972.377.1109
	(EMEA)	+44 (0) 1372 366 201
Support:	(U. S.)	866.4SKYWIRE
	(EMEA)	+44 (0) 1372 366 222
		support@skywiresoftware.com

PUBLICATION COPYRIGHT NOTICE

Copyright © 2008 Skywire Software, L.L.C. All rights reserved.

Printed in the United States of America.

This publication contains proprietary information which is the property of Skywire Software or its subsidiaries. This publication may also be protected under the copyright and trade secret laws of other countries.

TRADEMARKS

Skywire® is a registered trademark of Skywire Software, L.L.C.

Docucorp®, its products (Docucreate™, Documaker™, Docupresentment™, Docusave®, Documanager™, Poweroffice®, Docutoolbox™, and Transall™), and its logo are trademarks or registered trademarks of Skywire Software or its subsidiaries.

The Docucorp product modules (Commcommander™, Docuflex®, Documerge®, Docugraph™, Docusolve®, Docuword™, Dynacomp®, DWSD™, DBL™, Freeform®, Grafxc commander™, Imagecreate™, I.R.I.S.™, MARS/NT™, Powermapping™, Printcommander®, Rulecommander™, Shuttle™, VLAM®, Virtual Library Access Method™, Template Technology™, and X/HP™ are trademarks of Skywire Software or its subsidiaries.

Skywire Software (or its subsidiaries) and Mynd Corporation are joint owners of the DAP™ and Document Automation Platform™ product trademarks.

Docuflex is based in part on the work of Jean-loup Gailly and Mark Adler.

Docuflex is based in part on the work of Sam Leffler and Silicon Graphic, Inc.

Copyright © 1988-1997 Sam Leffler.

Copyright © 1991-1997 Silicon Graphics, Inc.

Docuflex is based in part on the work of the Independent JPEG Group.

The Graphic Interchange Format© is the Copyright property of CompuServe Incorporated. GIFSM is a Service Mark property of CompuServe Incorporated.

Docuflex is based in part on the work of Graphics Server Technologies, L.P.

Copyright © 1988-2002 Graphics Server Technologies, L.P.

All other trademarks, registered trademarks, and service marks mentioned within this publication or its associated software are property of their respective owners.

SOFTWARE COPYRIGHT NOTICE AND COPY LIMITATIONS

Your license agreement with Skywire Software or its subsidiaries, authorizes the number of copies that can be made, if any, and the computer systems on which the software may be used. Any duplication or use of any Skywire Software (or its subsidiaries) software in whole or in part, other than as authorized in the license agreement, must be authorized in writing by an officer of Skywire Software or its subsidiaries.

PUBLICATION COPY LIMITATIONS

Licensed users of the Skywire Software (or its subsidiaries) software described in this publication are authorized to make additional hard copies of this publication, for internal use only, as long as the total number of copies does not exceed the total number of seats or licenses of the software purchased, and the licensee or customer complies with the terms and conditions of the License Agreement in effect for the software. Otherwise, no part of this publication may be copied, distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, manual, or otherwise, without permission in writing by an officer of Skywire Software or its subsidiaries.

DISCLAIMER

The contents of this publication and the computer software it represents are subject to change without notice. Publication of this manual is not a commitment by Skywire Software or its subsidiaries to provide the features described. Neither Skywire Software nor its subsidiaries assume responsibility or liability for errors that may appear herein. Skywire Software and its subsidiaries reserve the right to revise this publication and to make changes in it from time to time without obligation of Skywire Software or its subsidiaries to notify any person or organization of such revision or changes.

The screens and other illustrations in this publication are meant to be representative, not exact duplicates, of those that appear on your monitor or printer.

Contents

Introduction

- 2 System Requirements
 - 2 Operating systems
 - 3 Networks
 - 4 Hardware
- 5 Documaker Server Requirements
 - 5 On the z/OS (OS/390) Platform
 - 6 On UNIX Systems
 - 6 On AIX systems
 - 7 On Linux systems
 - 7 On Solaris systems
 - 8 On the PC Platform
- 9 Docupresentment Requirements
 - 9 Docupresentment Workstation
 - 9 Docupresentment Server
 - 9 On Windows systems
 - 10 On AIX systems
 - 10 On Linux systems
 - 11 On Solaris systems
 - 11 Web Server
- 12 iPPS/iDocumaker
 - 12 Basic requirements
 - 12
 - 12 Client requirements
 - 13 Server requirements
 - 13 Web server
 - 14 Recommendations
 - 14 Using the right Java environment

Installing Documaker Server on OS/390

- 2 Overview
 - 2 Installing the System
 - 2 Configuring Your Printer Types
 - 2 Configuring your system for Xerox Metacode
 - 2 Configuring your system for AFP printers
 - 2 Configuring your system for PostScript printers

- 3 Configuring your system to produce PDF files
 - 3 Configuring Host Archive
 - 3 Checking Your Installation
 - 3 Optimizing Performance
 - 3 Additional Information
- 4 Installing the System
 - 4 Copying the LOADDAP Job
 - 5 Modifying the LOADDAP Job
 - 5 Submitting the LOADDAP job
- 6 Upgrading Your System
 - 6 Determining your System's Patch Level
- 7 Customizing Your System
 - 7 If You Do Not Have a Source Code License
 - 7 Running the COMPSDK Job
 - 8 Running the GENDATAL Job
 - 8 Running the GENPRTL Job
 - 8 If You Have a Source Code License
 - 9 Running the COMPALL Job
 - 10 Running the LINKALL Job
- 11 Configuring Your Printer Type
 - 11 Creating Xerox Metacode Printstreams
 - 11 Changing the Xerox JSL
 - 11 Viewing the JSL
 - 12 JSL requirements
 - 13 Changing the FSISYS INI File
 - 15 PrtType:XER control group
 - 16 Printer1 control group
 - 16 Pre-compiling FAP Files into Metacode Files
 - 17 Making Printer Resources Available
 - 17 Fonts
 - 17 Loading fonts onto your printer
 - 17 Logos
 - 18 Changing the JCL
 - 18 DAP procedure (or the GenPrtX job)
 - 18 GENERXER job
 - 18 Creating AFP Printstreams
 - 18 Allocating AFP-related Datasets
 - 18 Making Printer Resources Available
 - 19 Fonts
 - 19 Page segments
 - 19 FormDefs
 - 19 Overlays

- 19 Pre-compiling FAP Files into AFP Overlays
 - 19 Changing the FSISYS INI File
 - 19 PrtType:AFP control group
 - 20 Printer control group
 - 20 Printer1 control group
 - 20 Changing the JCL
 - 20 Using the DAP procedure (or the GenPrtX job)
 - 20 GENERAFP job
- 21 Creating PostScript Printstreams
 - 21 Changing the FSISYS INI File
 - 22 Changing the JCL
 - 22 Printing PostScript Printstreams
- 23 Creating PDF Files
 - 23 Changing the FSISYS INI File
 - 24 Changing the JCL
 - 24 Creating the PDF Printstream
- 25 Configuring Host Archive
 - 26 Configuring Host Archive Using DB2
 - 26 Creating DB2 Objects
 - 26 Running the BINDDB2 (or COMPDB2) Jobs
 - 27 Running ALLOCDB2 and COMPDB2
 - 27 Modifying the FSISYS INI File for Host Archive
 - 27 ArcRet control group
 - 27 Archival control group
 - 28 DBHandler:DB2 control group
 - 28 DB2_FileConvert control group
 - 28 DBTable control group
 - 28 Trigger2Archive control group
 - 29 Changing the JCL for Host Archive
 - 30 Archiving to Documange
 - 30 Modifying the FSISYS File
 - 31 Adding IP Addresses and System/Domain Names
 - 31 Changing the JCL
 - 32 Archiving Using Stacked DPA
 - 32 Changing the JCL
- 33 Checking Your Installation
 - 33 Checking Your FSIUSER and FSISYS Settings
 - 36 Checking the JCL
 - 36 Running GenTrnX, GenDataX, and GenPrtX separately
 - 37 Running DAPRUN (or GenTrnX, GenDataX, and GenPrtX)
 - 37 Running DAPRUNC to Improve Performance
 - 37 Logging messages when running RPEX1
 - 39 Logging messages when running UTEX1

- 41 Running GenArcDX
 - 41 RPEX1 messages
 - 42 UTEX1 messages
- 43 Running GenArcX
 - 43 RPEX1 messages
 - 43 UTEX1 messages
- 44 Printing the Output
 - 44 Xerox Metacode printer
 - 44 BARR-attached Metacode printer
 - 44 IBM AFP printer
- 45 Optimizing Performance
 - 46 Compile Options
 - 46 OPTIMIZE
 - 46 NOVALIDATEHANDLE
 - 46 INLINE
 - 46 Language Environment (LE) or c/370 Runtime Options
 - 46 REPORT
 - 46 HEAP
- 47 File Types and Characteristics
 - 47 Block sizes
 - 47 Record formats
 - 47 Number of files
 - 47 Extract Files
 - 47 Defining the extract file as a VSAM ESDS
 - 47 DEFLIB
 - 47 Placing DDT files into a VSAM KSDS
 - 48 SETRCPTB
 - 48 Moving the SETRCPTB member into a VSAM KSDS
 - 48 FAPLIB
 - 48 TRNFILE
 - 48 NEWTRN
 - 48 NAFILE
 - 48 Creating a NAFILE as a VSAM file
 - 48 POLFILE
 - 48 Creating a POLFILE as a VSAM file
 - 48 Recipient Batch Files
 - 49 Pre-compiled Xerox Metacode Files (PMETLIB)
 - 49 Placing PMETs into a VSAM KSDS
 - 49 Print Files
- 49 Setting Your FSISYS INI Options
 - 49 Caching Options
 - 49 Caching FAP files
 - 49 DDT files

50	Using/Caching Xerox PMET files
50	Using AFP Overlays
50	Logging Options
50	LogTransactions option
50	LogToConsole option
51	Debug Options
51	If_Rule control group
51	RunMode control group
51	Other Options
51	MaxRecsPerTransaction option
51	AliasPrintBatches option
52	Defining the Extract File as a VSAM ESDS
54	Moving DDT Files into a VSAM KSDS
56	Moving JDts into a VSAM KSDS
58	Moving PMETs into a VSAM KSDS
60	Moving SETRCPTB to a VSAM KSDS
62	Creating NAFILEs and POLFILEs as VSAM KSDSs
63	The LOADDAP Job
69	OS/390 Libraries
72	Uploading and Downloading Resources
73	Transferring Files
74	Handling International Characters
74	Running CPCNV on a PC
74	Running CPCNV on an MVS
75	Xerox Image, Font, and Form Files
75	Xerox Pre-compiled Metacode (PMET) Files
76	OS/390 Programs and Utilities
76	AFPCOPY utility
76	AFPFMDEF utility
76	AFP2MVS utility
76	BARR2MVS utility
76	BARRWRAP utility
76	CPCNV utility
76	FAP2CFA utility
76	FAP2MET utility
77	FAP2OVL utility
77	FDT2CFA utility
77	FIXOFFS utility
77	FSIVER utility
77	SEQ2KSDS utility
77	GenArc program

77	GenData program
77	GenPrint program
78	GenTrn program
78	LOG2PSEG utility
78	PDFKEY utility
78	PDS2VSAM utility
78	RCP2VSAM utility
78	SAMPAFP utility
78	TRANSLAT utility
78	XERDNLD utility

Installing Documaker Server on UNIX/Linux

80	Overview
80	What's on the Installation CD
80	Installing the System
80	Checking Your Installation
80	Using the Documentation
80	Start-Up Tips
80	Optimizing Performance
80	Uploading and Downloading Resources
80	Directory Structures
81	What's on the Installation CDs
81	Installation routines
81	On-line documentation
82	Installing the System
82	Before You Begin
82	Setting up libraries
82	Setting up users
84	Checking Your Installation
84	Solaris and Linux
84	AIX
84	HP-UX
84	Testing with the RPEX1 Sample Resources
84	Processing the RPEX1 Sample Resources
85	Printing the RPEX1 Output
85	Testing WIP with RPEX1
86	Viewing Archived RPEX1 Forms
87	Using the Documentation
88	Start-Up Tips

- 88 Using long file names
 - 88 Naming conventions for printers in Windows NT
- 89 Optimizing Performance
 - 89 CPU Time
 - 89 EXCPs
 - 89 Wall Clock Time
 - 89 Batch Window
- 89 Setting Your FSISYS INI Options
 - 89 Caching FAP files
 - 90 DDT files
 - 90 Caching Xerox PMET files
 - 90 Using AFP Overlays
- 90 Logging Options
 - 90 LogTransactions option
 - 90 LogToConsole option
- 91 Debug Options
- 91 Run Options
- 91 Other Options
 - 91 MaxRecsPerTransaction option
 - 91 AliasPrintBatches option
- 92 Uploading and Downloading Resources
 - 92 Transferring Resource Files Between UNIX/Linux and Windows
 - 92 Uploading a Library from PC to UNIX
 - 92 Downloading Print Streams from UNIX to PC
- 93 Directory Structures
 - 93 Run Time Environment (RTE)
- 93 Master Resource Library (MRL)
- 94 Software Development Kit (SDK)

Installing Documaker Server on Windows

- 96 Overview
 - 96 What's on the Installation CD
 - 96 Installing the System
 - 96 Checking Your Installation
 - 96 Using the Documentation
 - 96 Start-Up Tips
 - 96 Optimizing Performance
- 97 What's on the Installation CD
 - 97 On-line documentation

98	Installing the System	
98	Before You Begin	
98	Using NTFS drive formats	
98	Setting up libraries	
98	Setting up users	
99	Checking Your Installation	
99	Testing with the RPEX1 Sample Resources	
99	Processing the RPEX1 Sample Resources	
100	Printing the RPEX1 Output	
100	For an AFP printer	
100	For a Metacode printer	
100	For a PCL printer	
100	For a PostScript printer	
101	Testing WIP with RPEX1	
101	Viewing Archived RPEX1 Forms	
102	Using the Documentation	
103	Start-Up Tips	
103	Using long file names	
103	Naming conventions for printers in Windows NT	
103	Displaying objects in color in Windows	
104	Optimizing Performance	
105	Setting Your FSISYS INI Options	
105	Caching Options	
105	Caching FAP files	
105	DDT files	
105	Using/Caching Xerox PMET files	
105	Using AFP Overlays	
106	Logging Options	
106	LogTransactions option	
106	LogToConsole option	
106	Debug Options	
106	If_Rule control group	
106	Run Options	
106	RunMode control group	
107	Other Options	
107	MaxRecsPerTransaction option	
107	AliasPrintBatches option	

CHAPTER 1

Introduction

This manual provides instructions for installing the Documaker Server software on computers running OS/390 (MVS), UNIX/Linux, and 32-bit Windows, such as Windows 2000 and Windows XP.

This table will help you find the information you need:

To install	See
Documaker Server on Windows	Installing Documaker Server on Windows on page 95
Documaker Server on OS/390 (MVS)	Installing Documaker Server on OS/390 on page 1
Documaker Server on UNIX/Linux	Installing Documaker Server on UNIX/Linux on page 79

A summary of the system requirements follows.

SYSTEM REQUIREMENTS

Operating systems

Skywire Software applications run on a variety of operating systems and hardware platforms. Make sure you have these components before you install the following Skywire Software applications.

The following applications run on a variety of operating systems, principally Windows 32-bit operating systems such as Windows 2000, Windows 2003, Windows Vista, and Windows XP, UNIX/Linux 32-bit operating systems such as AIX, Solaris, and Linux x86, and z/OS (OS/390). This table shows the various product offerings and the operating systems under which they run.

NOTE: To store a Documaker version 11.0 resource library in Documanage, you must have Documanage version 6.3 SR 2 or version 6.4 SR 1 or higher.

	Windows+	z/OS (OS/390)	AIX	Linux	Solaris
Docucreate	Yes	No	No	No	No
Documaker Studio	Yes	No	No	No	No
Documaker Workstation	Yes	No	No	No	No
Docupresentment	Yes	No	Yes	Yes	Yes
PDF 417++	Yes	Yes	Yes	Yes	Yes
iPPS (COM+)+	Yes	No	No	No	No
iDocumaker Workstation (Java)+	Yes	No	Yes	Yes	Yes

Documaker Server

GenTrn	Yes	Yes	Yes	Yes	Yes
GenData	Yes	Yes	Yes	Yes	Yes
GenPrint	Yes	Yes	Yes	Yes	Yes
GenWIP	Yes	Yes	Yes	Yes	Yes
GenArc	Yes	Yes	Yes	Yes	Yes

+ Includes Windows 2000, Windows 2003, Windows XP, Windows Vista, Windows 2000 Server, and Windows 2003 Server.

++ Beginning with version 11.2, PDF417 is included as a component of Documaker Server.

+++ Runs under any operating system that supports the Java Virtual Machine.

++++ Runs under Microsoft Windows 2000 Server and Windows 2003 Server.

	Windows+	z/OS (OS/390)	AIX	Linux	Solaris
Printers**					
AFP	Yes	Yes	Yes	Yes	Yes
GDI	Yes	No	No	No	No
HTML	Yes	No	Yes	Yes	Yes
Metacode	Yes	Yes	Yes	Yes	Yes
PCL	Yes	No	Yes	Yes	Yes
PCL 6*	Yes	No	Yes	Yes	Yes
PDF	Yes	Yes	Yes	Yes	Yes
PostScript	Yes	Yes	Yes	Yes	Yes
RTF	Yes	No	Yes	Yes	Yes
VIPP	Yes	Yes	Yes	Yes	Yes
XML**	Yes	Yes	Yes	Yes	Yes

+ Includes Windows 2000, Windows 2003, Windows XP, Windows Vista, Windows 2000 Server, and Windows 2003 Server.

* You must have PCL 6 or higher for Unicode support on PCL-compatible printers. PCL 6 support became available in version 10.2.

** Printer support depends on licensing. For example, PDF and HTML are licensed separately for the PPS market and PDF is licensed separately for the z/OS market.

Networks

The system does not use any specific network calls and is expected to work on any network compatible with Microsoft programs. At Skywire Software we use Windows servers and, to a lesser extent, Novell servers.

NOTE: The network file server you use with Documaker Studio or Documaker Workstation must be a 100% Windows network compatible. Some UNIX systems that offer NFS support are not 100% Windows compatible and some UNIX systems do not honor Windows file locking calls and may not be suitable for use as a file server in a true multi-user environment.

Hardware This table outlines the minimum hardware Skywire Software uses to test the system on a single user Windows workstation. Specific requirements for running the rules processing components of Documaker on other operating systems follow. We suggest you run the system on a similar or better computer.

	Minimum Test Hardware
CPU	Pentium II 400 MHz
Memory	512mb RAM
Hard disk*	250mb
Printer	HP-compatible printers supporting PCL5 or higher
Printer memory	8mb RAM
Monitor	Color SVGA, 17-inch screen monitor

* Additional space may be required for your customized forms.

DOCUMAKER SERVER REQUIREMENTS

Your computer must have certain software and hardware components to run the programs that comprise the Documaker Server system. Depending on your software license, operating environment, and the market your solution was created for, these requirements vary.

The following tables outline the minimum hardware Skywire Software uses to test Documaker Server. We suggest that you run the system on a similar or better configuration.

NOTE: For more specific information on the GenArc program and the additional archive and retrieval capabilities available from Skywire Software, refer to the [Documaker Server System Reference](#).

Should your company have special needs, contact your sales representative and keep in mind that, by using upload and download programs, additional functionality is available.

On the z/OS (OS/390) Platform

Skywire Software's DAP and Documaker Server products run on the following versions/releases of IBM's operating systems:

- OS/390 version 1.1 to version 2.10
- z/OS version 1.6 and higher

NOTE: Following OS/390 version 2.10, new versions were named z/OS. Documaker runs on OS/390 and z/OS. In this manual, OS/390 and z/OS are referred to as z/OS unless otherwise noted.

No product upgrades are required and no incompatibility problems have been reported when running Documaker Server on any of these operating system releases.

	Requirements
Hard disk	150mb
Printer	Any printer which supports IBM AFP, Xerox Metacode, or Adobe PostScript
Runtime library	IBM Language Environment for OS/390 version 2.10 or higher
Compiler	(Only necessary if adding custom code to the system) IBM C/C++ Compiler for OS/390 version 2.10 or higher

NOTE: Regardless of the type of computer you run the system on, to print charts on Xerox Metacode printers, you must have a GVG card. To print charts on IBM AFP printers, you must have a GOCA card.

The amount of hard disk space you will need depends mainly on the volume of data you must process. Keep in mind too, that the C/C++ compiler is only required if you plan to write your own custom rules and recompile the source modules provided in the Software Developer's Kit (SDK).

On UNIX Systems

For all UNIX systems, you can use any printer that supports IBM AFP, PCL, PostScript level 2, or Xerox Metacode. For HP printers, you need at least 6mb of memory, more if you are printing complicated graphics. The amount of hard disk space you need depends on the volume of data you process. Keep in mind too, that a compiler is only required if you plan to recompile the system, such as if you customize the source code or use a runtime library other than the one shown for your operating system.

NOTE: For any UNIX installation, first make sure you have the uudecode, uncompress, and awk utilities installed.

On AIX systems

	Requirements
Operating system	AIX version 5.2 or higher
Model*	pSeries - Power RISC
Compiler	(Only necessary if adding custom code to the system) IBM Visual Age C/C+ version 6 IBM C/C++ Enterprise Edition for AIX v7
Runtime library	C Set ++ Runtime for AIX 5.0 or higher

	Tested on
Model*	pSeries p650
CPU	6 x 1.45GHz Power4+ processors
Memory*	12GB
Hard disk**	Two 36.4GB 10,000RPM Ultra3 SCSI drives

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On Linux systems

	Requirements
Operating system	GNU/Linux distributions
Model	Intel/AMD based systems
Compiler	(Only necessary if adding custom code to the system) GNU C/C++ compiler, gcc-3.2.3-58 or higher v3.2.3, gcc-c++-3.2.3-58 or higher v3.2.3
Runtime library	libgcc-3.2.3-58 or higher v3.2.3, libstdc++-3.2.3-58 or higher v3.2.3, compat-libstdc++-7.3-2.96.128 or higher v7.3, compat-glibc-7.x-2.2.4.32.6 or higher v7.x, glibc-2.3.2-95-30 or higher v2.3.2

	Tested on
Model*	Dell PWS450
Operating system	RedHat Enterprise Linux v3.1
CPU	2 x 2.40GHz Xeon processors
Memory*	3GB
Hard disk**	70GB SCSI drive

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On Solaris systems

	Requirements
Operating system	Sun Solaris 9/SunOS 5.9 (SPARC based) or higher
Model*	UltraSPARC based
Compiler	(Only necessary if adding custom code to the system) Sun ONE Studio 8
Runtime library	Core Solaris 9

	Tested on
Model*	Sun Fire v240 Server
Operating system	Solaris v9 SPARC
CPU	2 x 1.28GHz UltraSPARC IIIi Cu
Memory*	2GB
Hard disk**	Four 36GB SCSI drives

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On the PC Platform

The amount of hard disk space you will need depends mainly on the volume of data you must process. Keep in mind too, that a compiler is only required if you plan to recompile the system, such as if you customize the source code.

	Requirements
CPU	A 300 MHz or higher processor clock speed recommended (single or dual processor system); Intel Pentium/Celeron family, or AMD K6/Athlon/Duron family, or compatible processor recommended
Memory*	128mb RAM
Hard disk	1.5 gigabytes
Removable media	CD-ROM or DVD drive
Other components	Keyboard and mouse or compatible pointing device
Monitor	Color SVGA, 17-inch screen monitor
Printer	Any printer which supports PCL level 5 (HP IV or greater), PostScript level 2, IBM AFP, or Xerox Metacode
Printer memory**	8mb for HP printers
Compiler	Microsoft Visual Studio .NET 2003 for Windows XP Microsoft Visual Studio .NET 2003 for Windows 2000

* Additional memory, while not required, will improve system performance.

** Additional memory may be required if printing complicated graphics.

DOCUPRESENTMENT REQUIREMENTS

Your computer must have certain software and hardware components to run Docupresentation. Depending on your software license and operating environment, these requirements vary.

Docupresentation Workstation

For a Docupresentation workstation, you must have a personal computer equipped with the following:

- Microsoft Internet Explorer version 6.0 or later for Windows 2000 or Windows XP or higher
- Adobe • Acrobat Reader version 7.0 or higher

Docupresentation Server

You can run a Docupresentation on the following operating systems:

- Windows
- AIX
- Linux
- Solaris

NOTE: For both Docupresentation Workstation and Server, you must have Java 1.5 or higher.

The following tables provide more detailed information on Skywire Software's minimum platform requirements for testing systems.

On Windows systems

	Tested on
Operating system	Windows 2000
CPU*	1xPentium II - 400 mHz
Memory*	256 MB
Hard disk (RTE)	25 MB
Hard disk (MRL)**	75 MB

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On AIX systems

	Requirements
Operating system	AIX version 5.2 or higher
Model*	pSeries - Power RISC
Compiler	(Only necessary if adding custom code to the system) IBM Visual Age C/C+ version 6
Runtime library	C Set ++ Runtime for AIX 5.0 or higher

	Tested on
Model*	pSeries p650
CPU	6 x 1.45GHz Power4+ processors
Memory*	12GB
Hard disk**	Two 36.4GB 10,000RPM Ultra3 SCSI drives

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On Linux systems

	Requirements
Operating system	GNU/Linux distributions
Model	Intel/AMD based systems
Compiler	(Only necessary if adding custom code to the system) GNU C/C++ compiler, gcc-3.2.3-49 or higher, gcc-c++-3.2.3-49 or higher
Runtime library	glibc-2.3.2-95.30 or higher, compat-glibc-7.x-2.2.4.32.6, libstdc++-3.2.3-49 or higher, compat-libstdc++-7.3-2.96.128

	Tested on
Model*	Dell PWS450
Operating system	RedHat Enterprise Linux v3.1
CPU	2 x 2.40GHz Xeon processors
Memory*	3GB
Hard disk**	70GB SCSI drive

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

On Solaris systems

	Requirements
Operating system	Sun Solaris 9/SunOS 5.9 (SPARC based) or higher
Model*	UltraSPARC based
Compiler	(Only necessary if adding custom code to the system) Sun Workshop C/C++ v5.0
Runtime library	Core Solaris 9

	Tested on
Model*	Sun Fire v240 Server
Operating system	Solaris 9/SunOS 5.9 (SPARC based)
CPU	2 x 1.28GHz UltraSPARC IIIi Cu
Memory*	2GB
Hard disk**	Four 36GB SCSI drives

*Additional memory and a faster CPU is not required, but will improve performance.

** Additional space required for your customized forms

Web Server

This table outlines the web server requirements for each operating system:

Operating system	Web server
Windows	2000 Server or 2003 Server (or higher), such as Microsoft Internet Information Server 4.0 (or higher).
AIX	Web server for AIX 5.2, such as IBM's HTTP Server for AIX version 1.3.3.1 or higher with the Java Runtime Environment and/or JDK for AIX, version 1.4.0 or higher.
Linux	Web server for Linux, such as Apache 1.3.12 or higher or IBM HTTP Server 1.3.9 or higher.
Solaris	Web server for Sun Solaris 7 or higher on SPARC, such as Java Web Server 2.0 or Apache 1.3.9 with the Java Runtime Environment and/or JDK for Solaris, version JRE 1.4.0 or higher. IBM HTTP Server 1.3.9 or higher can also be used.

NOTE: IDS 2.0 requires Java 1.4 or higher. IDS 2.1 requires Java 1.5 or higher.

Skywire Software has tested Docupresentment and iDocumaker Workstation with the following web servers: Tomcat 4.0, Tomcat 5.0, WebSphere Application Server 4.0, and WebSphere Application Server 5.0

iPPS/iDOCUMAKER

Your computer must have certain software and hardware components to run iPPS or iDocumaker. This table outlines those requirements:

Basic requirements

	Requirements
CPU	Pentium III or greater
Operating systems	Windows 2000, Windows XP, or Windows 2003 Server
Memory*	256MB RAM
Hard disk**	400 MB free
Other components	Keyboard and mouse or compatible pointing device
Monitor	Color SVGA monitor

* Additional memory, while not required, will improve system performance.

** The amount of hard disk space you will need depends mainly on the volume of data you must process.

NOTE: For iDocumaker Workstation, you must have Java 1.4 or higher.

Client requirements

In addition to the basic requirements, each client should have the following:

- Windows 2000 Professional or XP Professional or later
- Adobe Acrobat 7.0 or higher
- Microsoft Internet Explorer 6.0 or higher with these Internet security options enabled:
 - Run ActiveX controls and plug-ins
 - Script ActiveX controls safe for scripting
 - Allow cookies that are stored on your computer
 - Allow per-session cookies (not stored)
 - Java Permissions (set to Low Safety)
 - Access data sources across domains
 - Active Scripting
 - Scripting of Java Applets
 - Java console (requires restart)
 - Java logging
 - JIT compiler for virtual machine (requires a restart)
- Skywire Software's WIP Edit, version 11, patch 10 or higher
 - Java VM – Java console enabled (requires a restart)
 - Java VM – Java logging enabled
 - Java VM – JIT compiler for virtual machine enabled (requires a restart)

Server requirements

In addition to the basic and client requirements, the computer you will use as a server should be configured with the following:

For COM+ implementations	For J2EE implementations
Internet Information Services (IIS) with World Wide Web Server and File Transfer Protocol (FTP) Server	Apache Tomcat or IBM WebSphere Note: Apache Tomcat has been tested but is not recommended for production use.
A database such as Microsoft Access database (Access 97 or higher), xBase database, or SQL database	A database such as Microsoft Access database (Access 97 or higher), xBase database, or SQL database
Visual Basic runtimes	not applicable
Microsoft XML Core Services 4.0 SP2 (msxml4)	not applicable
ADO 2.6 or later	not applicable
A static IP address	A static IP address

Web server

For the web server, you should have:

- Minimum Pentium III with 512MB of RAM.
- Windows 2003 Server
- Component Services or Microsoft Transaction Server
- Microsoft Visual Basic 6 Runtimes (included/installed with iPPS 3.1)
- Microsoft Active Data Objects 2.6 or greater (included/installed with iPPS 3.1)
- IBM WebSphere MQ (formerly MQSeries) or Microsoft Message Queue client
- ODBC-compliant database (SQL Server/Oracle/DB2 recommended for production)
- Microsoft's XML parser MSXML 4.0 sp2
- Skywire Software's Docupresentment version 10.2 (IDS version 1.8) or greater

Recommendations

NOTE: Skywire Software has tested an iDocumaker Workstation J2EE version 3.1, patch 25 implementation on WebSphere Application Server (WAS) version 6.02 and WebSphere MQ Series version 6.0. We recommend you use WAS version 6.02 or greater.

We also recommend these additional products for your iPPS implementation:

Product	Description
FAP2HTML utility	Use to convert FAP files into HTML for iPPS. This utility is not needed with iPPS/iDocumaker com+ v3.11 or J2ee v3.1 because these products can dynamically produce HTML from a master resource library.
DHTML Text Editor	Use to alter forms.
Documaker Server	Use for rules publishing.

Using the right Java environment

This table shows various web servers Skywire Software has tested with and the Java version you should use with those web servers and with iPPS.

For	Use
Tomcat 4.0	Tomcat using Java 1.3 (iPPS using the J2EE standard 1.2)
Tomcat 5.0	Tomcat using Java 1.4 (iPPS using the J2EE standard 1.3)
WebSphere Application Server 4.0	WebSphere Application Server using Java 1.3 (iPPS using the J2EE standard 1.2)
WebSphere Application Server 5.0	WebSphere Application Server using Java 1.4 (iPPS using the J2EE standard 1.3)

CHAPTER 2

Installing Documaker Server on OS/390

This chapter provides information on how to install and configure Documaker on an OS/390 (MVS) system.

NOTE: Following MVS version 5.2.2, new versions of this operating system were named OS/390. Following OS/390 version 2.10, new versions were named z/OS. Documaker Server runs on MVS, OS/390, and z/OS. In this manual, MVS, OS/390, and z/OS are referred to as *OS/390* unless otherwise noted.

You will find information on these topics:

- [Overview on page 2](#)
- [Installing the System on page 4](#)
- [Upgrading Your System on page 6](#)
- [Customizing Your System on page 7](#)
- [Configuring Your Printer Type on page 11](#)
- [Configuring Host Archive Using DB2 on page 26](#)
- [Checking Your Installation on page 33](#)
- [Optimizing Performance on page 45](#)

In addition, you'll also find information about...

- [The LOADDAP Job on page 63](#)
- [OS/390 Libraries on page 69](#)
- [Uploading and Downloading Resources on page 72](#)
- [OS/390 Programs and Utilities on page 76](#)

OVERVIEW

This chapter provides you with steps to install and configure Documaker Server on your OS/390 system. This overview discusses the contents of this chapter.

NOTE: See [System Requirements on page 2](#) for information about system requirements.

Installing the System

Documaker Server is distributed on 3480 cartridge tape for MVS systems. For detailed instructions, see [Installing the System on page 4](#). The process includes these steps.

- 1 Copy the LOADDAP job.
- 2 Modify and submit the LOADDAP job.

Configuring Your Printer Types

The system produces output for Xerox Metacode, IBM AFP, PostScript, PDF, or compatible printers. The steps differ, depending on the printer you will use.

Configuring your system for Xerox Metacode

Here is an overview of the steps required to configure the system for Xerox Metacode or compatible printers. For detailed instructions, see [Creating Xerox Metacode Printstreams on page 11](#).

- 1 Change the Xerox JSL.
- 2 Change the FSISYS file.
- 3 Pre-compile your FAP files.
- 4 Make your printer resources available. This can include uploading Xerox fonts, loading the fonts onto your printer, and converting logos.
- 5 Change the JCL for the DAP procedure (or the GenPrtX job) and the GENERXER job.

Configuring your system for AFP printers

Here is an overview of the steps required to configure the system for AFP or compatible printers. For detailed instructions, see [Creating AFP Printstreams on page 18](#).

- 1 Allocate AFP-related datasets.
- 2 Make your printer resources available. This can include uploading AFP fonts, loading page segments, setting up FormDefs, and creating overlays.
- 3 Pre-compile your FAP files into AFP overlays.
- 4 Modify the FSISYS file.
- 5 Modify the JCL for the DAP procedure (or the GenPrtX job) and the GENERAFP job.

Configuring your system for PostScript printers

Here is an overview of the steps required to configure the system for PostScript printers. For detailed instructions, see [Creating PostScript Printstreams on page 21](#).

- 1 Change the FSISYS INI file.
- 2 Modify the JCL.

Configuring your system to produce PDF files

Here is an overview of the steps required to configure the system to produce PDF files. For detailed instructions, see [Creating PDF Files on page 23](#).

- 1 Change the FSISYS INI file.
- 2 Modify the JCL.

Configuring Host Archive

Here is an overview of the steps required to configure host archive. This is an optional step. For detailed instructions, see [Configuring Host Archive on page 25](#).

Checking Your Installation

Here is an overview of the steps required to configure host archive. This is an optional step. For detailed instructions, see [Checking Your Installation on page 33](#).

- 1 Check your FSIUSER and FSISYS settings.
- 2 Check your JCL.
- 3 Run the DAPRUN procedure (or GenTrnX, GenDataX, and GenPrtX).
- 4 Run GenArcDX (or GenArcX).
- 5 Print the output.

Optimizing Performance

Once you have installed, configured, and tested your system, you can review this topic to find ways to improve system performance. For more information, see [Optimizing Performance on page 45](#).

Additional Information

At the end of this guide you will also find information about the LOADDAP job, MVS libraries, uploading and downloading resources, and MVS programs and utilities.

INSTALLING THE SYSTEM

For OS/390 systems, Documaker is distributed on a 3480 cartridge tape. The tape contains several files including JCL files, object modules, executable modules, and sample resources you can use to test your installation.

NOTE: The object and executable modules were built using IBM's C/C++ for OS/390 version 2.10 compiler and corresponding Language Environment (LE) product.

COPYING THE LOADDAP JOB

The LOADDAP job is included on the installation tape in the JCLLIB dataset. You can use the JCL listed below to unload the LOADDAP job. Refer to any documentation that came with the tape to verify the exact version number of the files and the volume serial number of the tape.

Make any necessary modifications to this JCL (jobcard, dataset names, and so on) and submit the job. This job should receive a return code of 00.

```
//JWCI      JOB (33005), 'LOAD LOADJCL', CLASS=T, MSGCLASS=X,
//          NOTIFY=JWC
// * * * * *
// *          LOADLOAD - COPY THE LOADDAP JOB FROM TAPE TO MVS.
// *
// *
// * * * * *
//S1        EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//INDD      DD DSN=FSI.V110.JCLLIB, DISP=SHR, UNIT=CART,
//          VOL=SER=D11001
//OUTDD     DD DSN=FSI.V110.TEMP.JCLLIB, DISP=(,CATLG), UNIT=SYSDA,
//          SPACE=(CYL,(1,1,1))
//SYSIN     DD *
           C I=INDD,O=OUTDD
           SELECT MEMBER=LOADDAP
// *
```

MODIFYING THE LOADDAP JOB

Before submitting the LOADDAP Job, you should modify it to meet your system requirements.

Change any jobcard, dataset names, unit names, and so on so it will run on your system. The job uses an instream proc called LOAD. At the bottom of the job, you can specify the parameters that will be passed into the LOAD proc. This portion of the job is listed below along with a description of the parameters.

This job should receive a return code of 04 or less in each step.

```

...

//STEP1 EXEC LOAD,TUNIT=CART,
//          TVOLSER=D11001,          <= CHANGE
//          HLQ='FSI.V110',          <= CHANGE (seldom needed)
//          CUSTHLQ='CUSTOMER.V110.INST', <= CHANGE
//          DUNIT=SYSDA,
//          PDSTYPE=LIBRARY

```

Parameter	Description
TUNIT	The unit name that should be used for this tape device.
TVOLSER	The tape volume serial number. The volume serial number is printed on the installation tape.
HLQ	The High Level Qualifier of the installation datasets. Normally, the value already specified for this parameter is correct.
CUSTHLQ	The High Level Qualifier that should be used when creating the installation datasets on your OS/390 system.
DUNIT	A generic or esoteric name for your OS/390 system's DASD units.
PDSTYPE	The type of PDS to create. By default, the LOADDAP job creates the installation partitioned datasets as PDS/Es, not PDSS. If your installation does not support PDS/Es or if you choose not to use PDS/Es, change the PDSTYPE parameter in the LOADDAP job from LIBRARY to PDS.

SUBMITTING THE LOADDAP JOB

The LOADDAP job reads the installation tape, creates the system datasets, sample resource datasets, font datasets, and so on and populates these datasets from the tape. LOADDAP should receive a return code of 00 in every step.

The LOADDAP job is listed [on page 63](#).

NOTE: Once the LOADDAP job is finished, the JCLLIB will contain a sample JOBCARD member which can be copied into and used as a jobcard in subsequent jobs.

UPGRADING YOUR SYSTEM

Upgrading to a new version of Documaker or applying corrective service (patches) to your Documaker system requires that you perform a standard Documaker installation from tape.

DETERMINING YOUR SYSTEM'S PATCH LEVEL

You can determine the patch level of your Documaker system by running a Job provided in the FSIVERX member of JCLLIB. This Job (see below) runs the FSIVER utility which examines the contents of a *LINKLIB* dataset and looks for patch identifiers contained in the Documaker program modules in the LINKLIB dataset.

The FSIVER utility then produces a report listing the patches it found. Unless instructed otherwise, FSIVER produces both a detailed patch report and a summary patch report. See the [Docutoolbox Reference](#) for more information on the FSIVER utility.

```
//ZDA      JOB    (33005), 'FSIVER - 110 ', CLASS=T, MSGCLASS=X,
//          NOTIFY=&SYSUID
// *
//          SET HLQ='FSI.V110'    <== SET HIGH LEVEL QUALIFIER
//          SET RES='RPEX1'       <== SET RESOURCE (E.G. RPEX1, UTEX1)
// *
//          JCLLIB  ORDER=&HLQ..PROCLIB
// *
//
*****
// * PROGRAM   : FSIVER
// * PURPOSE   : CREATES A REPORT THAT LISTS WHICH PATCHES HAVE BEEN
// *              APPLIED TO THE PROGRAMS IN THE LINKLIB REFERENCED BY
// *              THE LINKLIB DD STATEMENT.
// *
// * PARSMS    : /I=PROGRAM (NAME OF MEMBER IN DD:LINKLIB)
// *              OR '*' TO LIST PATCH LEVEL OF ALL PROGRAMS IN
// *              DD:LINKLIB.
// *
//
*****
//FSIVER EXEC PGM=FSIVER, PARM='/ /I=*'
// *
//STEPLIB DD DSN=&HLQ..LINKLIB, DISP=SHR
//          DD DSN=SYS1.SCEERUN, DISP=SHR
//LINKLIB DD DSN=&HLQ..LINKLIB, DISP=SHR
//SYSPRINT DD SYSOUT=*
```

CUSTOMIZING YOUR SYSTEM

This step is optional.

Documaker is designed as a rules-based engine. Many rules are provided in the base product. These rules are located in the various source modules that make up a segment of the product called RULLIB. The Documaker architecture also lets you add your own rules, called *custom* rules. Some custom rules are provided, as examples, in a segment of the product called CUSLIB. If you want to modify these custom rules or add custom rules of your own, you should make your changes or additions to the CUSxxxx modules that are provided in the Documaker Software Developer's Kit (SDK).

After making changes to any source modules in the SDK, you will need to compile these source modules into object modules and then link a new GenData program. The GenData program is also known as the Rules Processor.

IF YOU DO NOT HAVE A SOURCE CODE LICENSE

The standard Documaker license includes a subset of the Documaker source and header modules referred to as the Software Developer's Kit (SDK). On OS/390, this SDK comprises the SOURCE and INCLIB datasets. Follow the steps outlined in the following topics.

Running the COMPSDK Job

To compile the modules provided in the Documaker SDK, modify and submit the job in COMPSDK. The COMPSDK job invokes the CBC compile proc for approximately 56 source modules. Each source module is compiled into an object module, and the object modules are written to the OBJLIB. The COMPSDK job should receive a return code of 04 or less in each step. A portion of the COMPSDK job is shown below.

```

/**** COPY JOBCARD HERE...
/*
/* COMPSDK - COMPILE JCL FOR THE DOCUMAKER SOFTWARE DEVELOPER KIT
/*          (SDK), WHICH IS A SUBSET OF THE COMPLETE DOCUMAKER
/*          SOURCE.
/*
/*CUSARC   EXEC CBC, MEM=CUSARC
/*CUSBANNR EXEC CBC, MEM=CUSBANNR
/*CUSBAT   EXEC CBC, MEM=CUSBAT
/*CUSBITMP EXEC CBC, MEM=CUSBITMP
/*CUSCALLB EXEC CBC, MEM=CUSCALLB
...

```

Running the GENDATAL Job

You can link-edit a new GenData program to incorporate any changes or additions you have made to the CUSxxxxx source modules. Run the job in JCLLIB member GENDATAL to link-edit GenData. The GENDATAL job first invokes the OBJUTIL proc to rebuild the object library directory, then it invokes the LINK proc to link-edit GenData. GENDATAL should receive a return code of 04 or less in each step. The GENDATAL job is shown below.

```
//* COPY JOBCARD HERE
//* * * * *
//*
//* LINK-EDIT GENDATA
//*
//* * * * *
//*
//ALIAS EXEC OBJUTIL
//*
//GENDATA EXEC LINK, MEM='GENDATA'
```

Running the GENPRTL Job

You can link-edit a new GenPrint program to incorporate any changes or additions you have made to the CUSxxxxx source modules. Run the job in JCLLIB member GENPRTL to link-edit GenPrint. The GENPRTL job first invokes the OBJUTIL proc to rebuild the object library directory, then it invokes the LINK proc to link-edit GenPrint. GENPRTL should receive a return code of 04 or less in each step. The GENPRTL job is shown below.

```
//* COPY JOBCARD HERE
//
*****
//*
//* LINK-EDIT GENPRINT
//*
//
*****
//*
//ALIAS EXEC OBJUTIL
//*
//GENPRINT EXEC LINK, MEM=GENPRINT
```

NOTE: If you purchased a license for PDF or PDF417 or both, the object modules you received include these features and will enable the resulting GenData and GenPrint to have the capabilities you licensed.

If You Have a Source Code License

Follow the steps outlined in the following topics.

Running the COMPALL Job

This task is optional. If you do have a source code license, you can compile the full source using the COMPALL member in JCLLIB. The COMPALL member invokes one of the compile procs, which can be found in PROCLIB, for each of the 950 or so source members. You will usually need to separate the COMPALL member into several jobs. COMPALL compiles each source module into an object module. The object modules are written to the OBJLIB. The COMPALL job should receive a return code of 04 or less in each step.

A portion of the COMPALL job is shown below.

```
//*** COPY JOBCARD HERE...  
//ADLER32A EXEC CBC, MEM=ADLER32A  
//AFPAEG EXEC CBC, MEM=AFPAEG  
//AFPA2E EXEC CBC, MEM=AFPA2E  
//AFPBAG EXEC CBC, MEM=AFPBAG  
//AFPBARCD EXEC CBC, MEM=AFPBARCD  
...
```

Running the LINKALL Job

This task is optional. Once the source modules are compiled into object modules, you need to link-edit the Documaker programs and utilities by running the LINKALL job. The LINKALL job first invokes the OBJUTIL proc, which rebuilds the object library directory, then it invokes the LINK proc for each program.

The LINKALL job should receive a return code of 04 or less in each step. A portion of the LINKALL job is shown below.

```
/* COPY JOBCARD HERE ...
//
*****
/* LINKALL - LINK ALL EXECUTABLES.
/*
/* 1. RUNS THE OBJECT UTILITY TO REBUILD THE @@DC370$ MEMBER
/* OF THE OBJECT LIBRARY.
/*
/* 2. LINK-EDIT ALL OF THE EXECUTABLES FOR DAP.
/*
//
*****
/*
//ALIAS1 EXEC OBJUTIL
/*
//AFP2MVS EXEC LINK, MEM=AFP2MVS <== USED FOR AFP PRINT
//AFPCOPY EXEC LINK, MEM=AFPCOPY
//AFPFMDEF EXEC LINK, MEM=AFPFMDEF <== USED FOR AFP PRINT
//BARR2MVS EXEC LINK, MEM=BARR2MVS <== USED FOR XEROX / BARR
//BARRWRAP EXEC LINK, MEM=BARRWRAP <== USED FOR XEROX / BARR
...

```

CONFIGURING YOUR PRINTER TYPE

On MVS, you can use the system to create print streams for these printing environments:

- Xerox Metacode (see [Creating Xerox Metacode Printstreams](#) below)
- AFP (see [Creating AFP Printstreams on page 18](#))
- PostScript (see [Creating PostScript Printstreams on page 21](#))
- PDF (see [Creating PDF Files on page 23](#))

The following topics tell you how to configure your system for these environments.

CREATING XEROX METACODE PRINTSTREAMS

Configuring your system to produce Xerox Metacode print streams involves these tasks:

- Making changes to the Xerox JSL
- Making changes to the FSISYS INI file
- Pre-compiling your FAP files into MET files (this task is optional)
- Making printer resources available
- Making modifications to the JCL

Changing the Xerox JSL

Configuring the system to print to a Metacode printer involves setting various initialization file settings, specifically those in the PrtType:XER control group in the FSISYS initialization file, which is usually a member of the DEFLIB PDS.

To know what values need to be used for each setting, look at the Xerox printer's configuration file. Xerox configuration settings are kept on the printer in a JSL file. The JSL file contains the initial settings under which the printer operates.

You can have multiple JSL files resident on a single printer, with the desired JSL file specified when you start the printer. It is not necessary to start the printer with a specific JDE,JSL combination to print Metacode streams. You must, however, have a JDE,JSL combination which can be dynamically switched to for the duration of that print stream that satisfies the requirements explained below.

Specific values from the JDE,JSL combination must be available to the GenPrint program. You make these values available by placing them in the FSISYS file.

Viewing the JSL

Before you look at any JSL files, first determine which JSL file will be active when print files are sent to the printer. The JSL file name can contain up to six characters and always has a JSL extension. Most Xerox Metacode printers (except the 4235) contain a built-in console editor for creating, viewing, modifying, and printing JSL files.

NOTE: You may want to print your Xerox printer's current JSL file before you continue.

JSL requirements

To print a Metacode stream on your Xerox printer, you must have a Job Description Entry (JDE) with the parameter *VOLUME CODE=NONE*. If your JSL's default JDE entry or any other JDE entry in the JSL contains this parameter, you do not need to add another JDE entry. If the parameter is missing, you must add it. Follow your accepted procedures for making such JSL additions and modifications.

Once there is a JDE entry (or the default entry) that satisfies the *VOLUME CODE* requirement, enter values in the table below that correspond either to this JDE entry specifically or to the JSL file in general.

Use the table below to note the values in the Xerox JSL you will use. You will enter these values when you modify the FSISYS file.

JSL entry	Description	Values
DJDEIden	Corresponds to the IDEN statement's PREFIX= keyword (or PRE=). Indicates E for EBCDIC, A for ASCII, X for hexadecimal and a string value. If there is no E,A or X before the string value, an <i>E</i> is assumed by default.	
DJDEOffset	Corresponds to the IDEN statement's OFF= keyword.	
DJDESkip	Corresponds to the IDEN statement's SKIP= keyword.	
ImageOpt	If the JSL contains a "GRAPHICS = YES" statement, set ImageOpt to Yes. Otherwise, set it to No. You must set this option to Yes if you need the system to dynamically draw charts.	
JDEName	If you had to create a new JDE entry to specify <i>VOLUME CODE = NONE</i> , use the name of the new JDE entry. If a JDE entry already existed that contained <i>VOLUME CODE = NONE</i> , specify the name of that JDE (if it's the default, it's probably called <i>DFLT</i>).	
JDLName	The name of the JSL file.	
JDLHost	Corresponds to the VOLUME parameter's HOST= keyword. This value will be either IBMONL or IBMOS. If not specified, the default is <i>IBMOS</i> .	
JDLCode	Corresponds to the VOLUME statement's CODE= keyword for the initial JSL setting (at the top of the JSL file). This value will be either EBCDIC, ASCII, or NONE.	

JSL entry	Description	Values
JDLData	Corresponds to the LINE statement's DATA= keyword. Should be two numbers separated by a comma (omit the parentheses).	
PrinterInk	If the printer supports a highlight color, specify that color here. Otherwise, leave blank.	
JDLRStack	To find this value, find the RSTACK command (if there is one) and work backwards. The RSTACK command refers to a TEST label, which sets up a string test and refers to a CONSTANT, string, or value. For example... RSTACK: TEST=RST,DELIMITER=YES; RST: CRITERIA CONSTANT =(0,10,EQ,RSTK); RSTK: TABLE CONSTANT =X'13131313131313131313'; ...the value you would use would be: JDLRStack=0,10,EQ,X'13131313131313131313'	
JDLROffset	Locate the ROFFSET command (if there is one) and work backwards. See JDLRStack above.	
JDLRPage	Locate the RPAGE command (if there is one) and work backwards. See JDLRStack above.	

Changing the FSISYS INI File

NOTE: Two sets of resources are included on the installation tape. The RPEX1 set of resources is designed for the insurance market. The UTEX1 resources are designed for the utility market. You can verify your installation by running the system using one or both of these sets of resources.

The following instructions may ask you to modify the FSISYS initialization member of DEFLIB, so the DEFLIB you must modify is the one for the set of resources you plan to use, such as *hlq.v103.RPEX1.DEFLIB* or *hlq.v103.UTEX1.DEFLIB*, or both if you plan to use both.

Metacode data sets on MVS should be created with a Variable Blocked Machine character (VBM) Record Format (RECFM) and should have a Logical Record Length (LRECL) that is four bytes longer than the length of the longest Metacode record you plan to write.

MVS uses four bytes of each record in a Variable Blocked data set to store data about that record. For example, in your INI file you may have the JDLData option set to

0,250

which indicates the longest Metacode record will be 250 bytes long. If this is the case, your Metacode data set should be allocated with an LRECL of 254.

PrtType:XER control group

You must place the values you gathered from or added to the Xerox printer's JSL file into the PrtType:XER control group in the FSISYS INI file. This file is generally stored as a member called *FSISYS* within the sample DEFLIB PDS.

Below are the options in the PrtType:XER control group relevant to MVS environments. Using the table you completed earlier, make changes as necessary to the following values. The example below shows the default FSISYS values.

NOTE: You can comment out an INI control group or option by placing a semi-colon (;) before the control group or option.

```
< PrtType:XER >
  ColorCharts           = Yes
  CompileInstream       = No
  DownloadFonts         = No, Disabled
  InitFunc              = XERInit
  Module                = XERW32
  OutputFunc            = XEROutput
  OutMetFunc            = XEROutMet
  PageNumbers           = Yes
  PrintFunc             = XERPrint
  PrinterInk            = Blue
  TermFunc              = XERTerm
  SendColor             = Yes
  DJDEIden              = A'@@@DJDE'
  DJDEOffset            = 0
  DJDESkip              = 8
  Environment           = MVS
  OutMode               = JES2
  ImageOpt              = Yes
  JDEName               = DFLT
  JDLData               = 0, 255
  JDLHost               = IBMONL
  JDLName               = DFAULT
  JDLCode               = NONE
  JDLRStack             = 0, 10, EQ, X'13131313131313131313'
  JDLRPage              = 0, 5, EQ, X'FFFF26FFFF'Printer control group
```

The Printer control group tells the GenPrint program what type of output to produce. For the RPEX1 sample resources, the PrtType option is set to *XER*. For the UTEX1 sample resources, the PrtType option is set to *AFP*. Make sure the option is set correctly for your environment. For example, this setting tells the GenPrint program to produce Xerox Metacode print streams:

```
< Printer >
  ;PrtType = AFP
  PrtType = XER
```

Printer1 control group

The Printer1 control group contains PORT options which specify a DD name to which the system writes output for that recipient batch.

```
< Printer1 >  
PORT = DD:PRTBAT1
```

There may be other options present but they will be commented out with a semi-colon. Make sure the PORT option is set appropriately for your environment.

Pre-compiling FAP Files into Metacode Files

During the GenPrint process, FAP files (images) are compiled into Metacode files and arranged into the print stream. To speed execution, you can pre-compile—compile before running GenPrint—these FAP files.

NOTE: The FSISYS file included with the sample resources assumes you will be using pre-compiled Metacode files, or *PMETs*, since the use of PMETs increases performance. If, however, you *do not* want to run with PMETs, change the CompileInstream option in the PrtType:XER control group and DownloadFAP INI option in the RunMode control group to Yes and skip to the topic [Making Printer Resources Available on page 17](#).

You can use the FAP2MET utility to compile FAP files into Metacode files. To run the system using pre-compiled Metacode files you must run the FAP2MET utility for every FAP file in FORMLIB. Here's how:

- 1 Run the FAP2METS job in JCLLIB. This job deletes or re-allocates the PMETLIB PDS and runs the FAP2MET utility for every FAP file in FORMLIB or FAPLIB. This creates a corresponding *PMET* and stores it in the PMETLIB PDS. The FAP2MET job should receive a return code of 00 for each step.
- 2 Make sure the CompileInstream option in the PrtType:XER control group is set to *No* and that the DownLoadFAP option in the RunMode control group is set to *No*.
- 3 Modify the JCL for the DAP procedure or the GenPrtX job (please first read the topic [Changing the JCL on page 18](#)) so the PMETLIB DD statement is uncommented (it is included in the JCL but is commented out). This lets the GenPrint program open and read the PMETs you created.

Making Printer Resources Available

The resources your Xerox Metacode printer needs fall into two categories:

- Fonts
- Logos

The following topics tell you how to make these resources available to your printer.

Fonts

By default, the verification test (see [Checking Your Installation on page 33](#)) uses the AGFA fonts included with the system. If you installed the system from tape, the fonts were loaded into datasets called &HLQ..AGFA.XEROX.FONTLIB and &HLQ..AGFA.XEROX.ROTATED.FONTLIB when you ran the LOADDAP job. If that's the case, go to the topic, [Loading fonts onto your printer on page 17](#).

Loading fonts onto your printer

To load the AGFA fonts onto a Xerox printer, follow these steps:

NOTE: The names of the Xerox fonts begin with the characters *FX*. You may want to list the existing fonts on the printer to see whether any of your existing fonts have the same names as the fonts you are about to send to the printer.

- 1 Run the XERDNLDS member in JCLLIB. This job uses the FSISYS file you customized earlier. It converts the fonts into a format your Xerox printer can store. XERDNLDS should complete all steps with a return code of 00.
- 2 Run the GENDNLDS member in JCLLIB. This job runs the IBM utility IEBGENER to copy each font to the Xerox printer. Modify GENDNLDS as necessary to fit your standards. Be sure to set the SYSOUT output class to the JES2 output class for the Xerox printer. GENDNLDS should complete all steps with a return code of 00.

Logos

The verification test references FAP files which contain logos (bitmap-type graphics). You must place these logos on the Xerox printer either as FNT files or as IMG files.

If your Xerox printer has a graphics card, it can print IMG files and you should place the LOGOs on the printer as IMG files. If your printer does not have a graphics card, it cannot print IMG files—place the logos on the printer as FNT files.

When you installed the system, two PDSs were created called &HLQ..LOG2IMG and &HLQ..LOG2XFNT. These PDSs contain logos which have been converted into IMG and FNT files, respectively. You should download the contents of one of these PDSs to your Xerox printer.

For steps 1 and 2, choose either to load the IMG files (choose DD statement for LOG2IMG) or the FNT files (choose DD statement LOG2XFNT) to your Xerox printer:

- 1 Run the XERLOGOS job in JCLLIB. Edit the job to read from and write to the appropriate type of file (LOG2IMG or LOG2XFNT). This job should complete with return codes of 00 in all steps.
- 2 Run the GENLOGOS job in JCLLIB. Edit the job so it will read from the dataset you created in step 1 and so it will send the output to the correct JES sysout class. This makes sure the Xerox resources are sent to the Xerox printer. This job should complete with a completion code of 00 in all steps.

Changing the JCL

DAP procedure (or the GenPrtX job)

In the next topic you will run the system with the sample resources to make sure it has been installed and configured correctly. You must modify the jobs you will run to conform to your local JCL and environment standards. The last job, GenPrint, will reference the DD names you set up in the topic, [Printer1 control group on page 16](#).

When you run the system with the sample resources, you can run each step as a separate job (GenTrnX, GenDataX, and GenPrintX) or in sequence together by running a job called DAPRUN. The DAPRUN job invokes the DAP procedure which executes GenTrn, GenData, and GenPrint in this order.

For the verification test, you should use the DAPRUN job and edit the DAP procedure in PROCLIB. If, however, you want to run each step separately, edit the GenPrtX member in JCLLIB.

GENERXER job

You use the GENERXER job in JCLLIB to send the print streams created by the GenPrint program to the JES spool to be printed by your Xerox printer. Modify this job as necessary to match the file names you have used.

CREATING AFP PRINTSTREAMS

Configuring your system to produce AFP print streams involves these tasks:

- Allocating AFP-related datasets
- Making printer resources available.
- Pre-compiling FAP files into overlays (this task is optional)
- Making changes to the FSISYS initialization file
- Making changes to the JCL

Allocating AFP-related Datasets

To allocate the datasets required to perform AFP printing, use the ALLOCAFP job in the JCLLIB member. This job allocates the Form Definition Library (FDEFLIB), the Page Segment Library (PSEGLIB), and the Overlay Library (OVERLIB). The job should complete with a return code of 00.

Making Printer Resources Available

The resources your IBM AFP printer needs fall into these categories:

- Fonts
- Page segments
- FormDefs
- Overlays

The following topics tell you how to make these resources available to your printer.

Fonts By default, the verification test (see [Checking Your Installation on page 33](#)) uses the Agfa fonts included with the system. If you will print using IBM's Advanced Function Presentation (AFP), provided by the IBM Print Services Facility (PSF), you need to use these Agfa fonts.

The installation tape includes the Agfa 240-dpi fonts. If you want the full compliment of Agfa fonts, which includes 300-dpi fonts, contact Support Services and ask for the Agfa Font CD.

Page segments Logo Manager generates bitmap-type graphics into *logo* files which, on the PC, have an extension of *.LOG. The verification test uses images that contain these logos. For these images to print correctly, you must convert these logos into AFP Page Segments (PSEGs). You can run the LOG2PSEG utility on either the workstation or the MVS system to perform this task.

To convert logos for the verification test, run the LOG2PSGS job in JCLLIB. This job converts several logos from the sample FORMLIB or FAPLIB into page segments and places them into a PSEGLIB. The job should complete all steps with a return code of 00.

FormDefs Next, submit the AFPFMDFX job in JCLLIB to compile a *source* Form Definition File into an AFP-ready FormDef. This job should complete with a return code of 00.

Overlays To speed performance in the GenPrint process, you can pre-compile FAP files (images) into AFP overlays before you run the GenPrint program. Follow the directions in the next topic, Pre-compiling FAP Files into AFP Overlays, to create the AFP overlays.

NOTE: The FSISYS file included with the sample resources assumes you will be using AFP overlays, since the use of overlays increases performance. If, however, you do not want to run with overlays, change the SendOverlays option to *No* and the DownloadFAP option to *Yes* and skip to the topic [Changing the FSISYS INI File on page 19](#).

Pre-compiling FAP Files into AFP Overlays

The FAP2OVL utility pre-compiles FAP files into AFP overlays, which can improve performance. To pre-compile FAP files into AFP overlays, run the FAP2OVLS job in JCLLIB. This job converts the FAP files in the sample FAPLIB PDS into overlays and places them into the OVERLIB PDS.

Changing the FSISYS INI File

PrtType:AFP control group

Here are the options in the PrtType:AFP control group in the FSISYS file which apply to MVS environments. The FSISYS INI file should have been supplied with the value below:

```
< PrtType:AFP >
  SendOverlays=Yes
```

If you chose not to create AFP overlays (in the prior topic above), set the SendOverlays option to *No*. If you created overlays, make sure the option is set to *Yes*.

Printer control group

The Printer control group tells the GenPrint program what type of output to produce. For the RPEX1 sample resources, the `PrtType` option is set to *XER*. For the UTEX1 sample resources, the `PrtType` option is set to *AFP*. Make sure the option is set correctly for your environment. For example, this setting tells the GenPrint program to produce AFP print streams:

```
< Printer >
  PrtType = AFP
;PrtType = XER
```

Printer1 control group

The Printer1 control group contains PORT options which specify a DD name to which the system writes output for that recipient batch.

```
< Printer1 >
  PORT = DD:PRTBAT1
```

There may be other options present but they will be commented out with a semi-colon. Make sure the PORT option is set appropriately for your environment.

Changing the JCL

Using the DAP procedure (or the GenPrtX job)

In the topic, [Checking Your Installation on page 33](#), you will run the system using the sample resources. This will help you make sure your system is installed and configured correctly. Before you run the test, you must modify the jobs you will use during the test to match your local JCL and environment standards. The last job, GenPrint, references the DD names you may have added or uncommented (see [PrtType:AFP control group on page 19](#)).

When you run the system with the sample resources, you can run each step as a separate job (GenTrnX, GenDataX, and GenPrintX) or in sequence together by running the DAPRUN job. The DAPRUN job invokes the DAP procedure which executes GenTrn, GenData, and GenPrint in this order.

For the verification test, we recommend you use the DAPRUN job. If you choose to use the DAPRUN job, edit the DAP procedure in PROCLIB. If, however, you want to run each step separately, edit the GenPrtX member in JCLLIB.

NOTE: The DAP procedure included in PROCLIB (or the GenPrtX member of JCLLIB) for the UTEX1 resources is set up to produce AFP output file names such as AFPBAT1, AFPBAT2, and so on. You may want to inspect the procedure to make sure these names are correct, but you should not have to change the names.

GENERAFF job

You will use the GENERAFP job in JCLLIB to send the print streams created by the GenPrint program to the JES spool to be printed by your AFP printer. Modify this job as necessary to match the file names you have used.

CREATING POSTSCRIPT PRINTSTREAMS

Configuring the system to produce PostScript printstreams involves these tasks:

- Making changes to the FSISYS INI file
- Making changes to the JCL
- Printing the PostScript printstream

Changing the FSISYS INI File

Here are the options in the PrtType:PST control group in the FSISYS INI file that are relevant to MVS environments:

```
< PrtType:PST >
  Module           = PSTW32
  PageNumbers      = Yes
  Printfunc        = PSTPrint
; PrinterModel     = (PPD file)
  SendOverlays     = Yes
  SendColor        = Yes
  DownloadFonts    = Yes
```

If you are using a PostScript Printer Description (PPD) file, upload your PPD file (as text) to DEFLIB, uncomment the PrinterModel option by removing the semicolon (;), and set it to your PPD file in DEFLIB. For example, if your PPD file in DEFLIB is HP8000, set your option as shown here:

```
PrinterModel      = HP8000
```

Setting the SendOverlays option to Yes tells the GenPrint program to use PostScript overlays to speed its process. To create PostScript overlays, first run the OVLCOMP utility on Windows to convert your FAP files into PostScript overlays (the OVLCOMP utility only runs on Windows). You then upload (as binary) the PostScript overlays to the dataset referred to by OVERLIB DD in your JCL.

The Printer control group tells the GenPrint program what type of output to produce. For the RPEX1 sample resources, the PrtType option is set to XER. For the UTEX1 sample resources, the PrtType option is set to AFP. Make sure the option is set correctly for your environment. For example, this setting tells the GenPrint program to produce PostScript print streams:

```
< Printer >
;PrtType = AFP
PrtType = PST
;PrtType = XER
;PrtType = PDF
;EnableTransBanner      = True
;EnableBatchBanner      = True
;BatchBannerBeginScript = PreBatch
;TransBannerBeginScript = PreTrans
;BatchBannerEndScript   = PstBatch
;TransBannerEndScript   = PstTrans
```

The Printer1 control group contains PORT options which specify a DD name to which the system writes output for that recipient batch.

```
< Printer1 >  
    PORT = DD:PRTBAT1
```

There may be other options present but they will be commented out with a semicolon. Make sure the PORT option is set appropriately for your environment.

Changing the JCL

In the next topic, Check Your Installation XX, you run the system with sample resources to make sure it has been installed and configured correctly. You must modify the jobs you will run to conform to your local JCL and environment standards.

The last job, GenPrint, references the DD names you set up in the Printer1 control group.

When you run the system with the sample resources, you can run each step as a separate job (GenTrnX, GenDataX, and GenPrtX) or in sequence together by running a job called DAPRUN. The DAPRUN job invokes the DAP procedure which executes GenTrn, GenData, and GenPrint in this order.

For the verification test, use the DAPRUN job and edit the DAP procedure in PROCLIB. If, however, you want to run each step separately, edit the GenPrtX member in JCLLIB.

Printing PostScript Printstreams

To print PostScript print streams to a PostScript-capable printer, download (as binary) the print streams created by the GenPrint program to your Windows environment, and do a binary copy (see below) of the downloaded file to your PostScript printer.

```
>copy /b your_file your_printer
```

CREATING PDF FILES

NOTE: Creating PDF files from an OS/390 installation requires additional licensing. Contact your sales representative for additional information.

Configuring the system to produce PDF prints involves these tasks:

- Making changes to the FSISYS INI file
- Making changes to the JCL
- Creating the PDF file

Changing the FSISYS INI File

In the FSISYS INI file, below are the options in the PrtType:PDF control group relevant to MVS environments. The FSISYS INI file includes the values shown here:

```
< PrtType:PDF >
; Device           = E:\TEST.PDF
BookMark           = Yes, Page
DownloadFonts      = Yes
LanguageLevel      = Level1
Module             = PDFW32
PageNumbers        = Yes
PrintFunc          = PDFPrint
SendOverlays       = No
SendColor          = Yes
Encrypt            = N
SecurityGroup      = PDFEncryption
; PrintViewOnly    = No
; SplitText        = No
; SplitPercent     = 50
; Class            = PDF
; PrePrintedPaper= (not supported)
; PaperSize        = 0
Compression        = 0
FontCompression= 0
< PDFEncryption >
KeyLength          = 128
User               = M
Owner              = Docucorp
AllowModify        = FALSE
```

To produce secured PDF printstreams, set Encrypt option to Yes. Under the PDFEncryption control group, set the KeyLength, User, and Owner options as appropriate for your implementation.

The Printer control group tells the GenPrint program what type of output to produce. For the RPEX1 sample resources, the PrtType option is set to XER. For the UTEX1 sample resources, the PrtType option is set to AFP. Make sure the option is set correctly for your environment.

For example, this setting tells the GenPrint program to produce PDF printstreams:

```
< Printer >
;PrtType = AFP
;PrtType = PST
;PrtType = XER
PrtType = PDF
EnableTransBanner      = True
EnableBatchBanner      = True
BatchBannerBeginScript = PreBatch
TransBannerBeginScript = PreTrans
BatchBannerEndScript   = PstBatch
TransBannerEndScript   = PstTrans
```

The Printer1 control group contains PORT options which specify a DD name to which the system writes output for that recipient batch.

```
< Printer1 >
PORT = DD:PDFLIB(BAT10000)
```

There may be other options present. If so, preface them with a semicolon to comment them out. Make sure the PORT option is set appropriately for your environment.

In the RunMode control group, you will see these values:

```
< RunMode >
NAUnload      = Yes
DownloadFAP   = No
CompiledFAP   = Yes
ChkDstLenExceeded = No
LoadCordFAP   = No
; MergedDDTs  = No
```

Set the DownloadFAP option to Yes when producing PDF.

Changing the JCL

In the topic, [Checking Your Installation on page 33](#), you will run the system with sample resources to make sure it has been installed and configured correctly. You must modify the jobs you will run to conform to your local JCL and environment standards.

The last job, GenPrint, references the DD names you set up in the Printer1 control group.

When you run the system with the sample resources, you can run each step as a separate job (GenTrnX, GenDataX, and GenPrtX) or in sequence together by running a job called DAPRUN. The DAPRUN job invokes the DAP procedure which executes GenTrn, GenData, and GenPrint in this order.

For the verification test, use the DAPRUN job and edit the DAP procedure in PROCLIB. If, however, you want to run each step separately, edit the GenPrtX member in JCLLIB.

Creating the PDF Printstream

To print PDF printstreams to the printer, download (as binary) the print streams created by the GenPrint program to your Windows environment, and print to the printer by using your Adobe Reader to open the downloaded file and print.

CONFIGURING HOST ARCHIVE

The system lets you archive form sets that have been created by the GenData program. Archiving is performed by running the GenArc program and can be configured to archive the form sets in one of several ways:

- To the standard DAP archive. For more information, see [Configuring Host Archive Using DB2 on page 26](#).
- To Documange. For more information, see [Archiving to Documange on page 30](#).
- To Stacked DPA files. For more information, see [Archiving Using Stacked DPA on page 32](#).

CONFIGURING HOST ARCHIVE USING DB2

In addition to (or instead of) simply printing form sets, you can optionally archive your form sets and data using the GenArc program. The GenArc program on MVS systems supports archival to IBM's DB2 database management system.

Configuring a host archive system involves performing these tasks:

- Creating DB2 objects
- Running BINDDB2 or the ALLOCDB2 and COMPDB2 jobs
- Modifying the FSISYS file
- Making JCL changes

Creating DB2 Objects

The GenArc program, as configured for the sample library, uses these DB2 tables:

Table	Description
APPIDX	An application index table which contains a row for every archived form set.
ARCHIVE	An archive table which contains the actual NAFILE and POLFILE data for each archived form set.
CATALOG	A table which stores unique catalog IDs which the system uses as it builds the ARCKEY used in the APPIDX and ARCHIVE tables.
RESTART	A table in which GenArc restart information is stored.

You should create these tables using the ARCSQLR Job for the RPEX1 resources and the ARCSQLU Job for the UTEX1 resources. Modify the Jobs to suit your site's DB2 naming conventions and submit. The job should receive a return code of 00.

Running the BINDDB2 (or COMPDB2) Jobs

If you have a standard license, run the BINDDB2 job in JCLLIB as described below. If you have a source code license, skip to the following topic, [Running ALLOCDB2 and COMPDB2 on page 27](#).

The BINDDB2 Job performs DB2 binds for the DB2LIB and DB2LIB2 packages and the DAP110 plan. In the BINDDB2 job, change the DB2 subsystem, package names, and plan name to fit your standards. The BINDDB2 job should finish with return codes of 00 in all steps. Proceed to [Modifying the FSISYS INI File for Host Archive on page 27](#).

Running ALLOCDB2 and COMPDB2

The COMPDB2 job invokes the DB2 pre-compiler to pre-compile source files and place the resulting DBRMs into a PDS called DBRMLIB. If you installed Documaker from tape, this DBRMLIB dataset should exist, but if it is not available, you can allocate it by running the job ALLOCDB2. The ALLOCDB2 job should finish with a return code of 00.

The GenArc program uses programs called DB2LIB and DB2LIB2 to make all SQL calls. These SQL calls are prepared dynamically and are not static SQL calls.

To prepare the GenArc program for execution, run the job in member COMPDB2 of JCLLIB. The COMPDB2 member uses the DSNHC procedure in PROCLIB. Essentially, the COMPDB2 job will...

- DB2- pre-compile the DB2LIB and DB2LIB2 programs
- Compile the DB2LIB, DB2LIB2, and the GenArc programs
- Bind DB2LIB and DB2LIB2 into packages
- Bind the DB2LIB and DB2LIB2 packages into a plan
- Link-edit GenArc into an executable program, placing it in LINKLIB.

Depending on your DB2 system file names and C compiler file names, you will probably have to modify these procedures to meet your needs. The COMPDB2 job should finish with return codes of 00 or 04 in all steps.

Modifying the FSISYS INI File for Host Archive

Just as the FSIUSER and FSISYS initialization files provide the GenTrn, GenData, and GenPrint programs with configuration information, they also provide configuration information to the GenArc program.

The following control group and option settings must exist in either the FSIUSER or FSISYS members of DEFLIB. The FSISYS file shipped with the base product contains the values shown below. You only need to change these options if you have modified the names of the DB2 objects, such as the database name, table name, and so on.

ArcRet control group

The ArcRet control group contains information about the file (or table) names used for archiving information. The values for table names in this group cannot exceed eight characters. To specify a table name with more than eight characters use the DB2_FileConvert control group to map the eight character name you enter here to a longer (up to 18 characters) name.

```
< ArcRet >
  AppIdxDfd  = APPIDX
  AppIdx     = APPIDX
  CARFile    = ARCHIVE
  CATALOG    = CATALOG
  RestartTable= RESTART
```

Archival control group

The Archival control group indicates whether archived information is stored via a DBMS. For DAP archive to DB2, specify:

```
< Archival >
  ArchiveMem = Yes
```

DBHandler:DB2 control group

The DBHandler:DB2 control group tells the GenArc program that DB2 will be used to access the tables used during the GenArc process.

The Database option identifies the name of the DB2 database that contains the tables used by the GenArc program. Database names can consist of up to eight characters.

The CreateTable option indicates whether the GenArc program can create the tables it needs or if the tables must exist before it begins.

Enter	Description
No	Do not allow the GenArc program to create the DB2 tables.
Yes	Allow the GenArc program to create the DB2 tables.

The CreateIndex option indicates whether indexes are to be created for the APPIDX DB2 table if the APPIDX (DFD) member of DEFLIB contains keys information.

Enter	Description
No	Do not allow the GenArc program to create the DB2 indexes.
Yes	Allow the GenArc program to create the DB2 indexes.

```
< DBHandler:DB2 >
  CreateTable = No
  CreateIndex = No
```

DB2_FileConvert control group

The DB2_FileConvert control group lets you use DB2 table names that are longer than eight characters. The option on the left (APPIDX) is the value associated with the corresponding option in the [ArcRet control group on page 27](#). The value on the right (DAP110_APP_R1) is the name of the DB2 table as it exists in the DB2 subsystem. If your table names are not longer than eight characters, you do not need to make any entries in the DB2_FileConvert control group.

```
< DB2_FileConvert >
  APPIDX      = DAP110_APP_R1
  Archive     = DAP110_ARC_R1
  Catalog     = DAP110_CAT_R1
  Restart     = DAP110_RES_R1
```

DBTable control group

Use the DefaultTag option to specify the default tag for ODBC and DB2. This tag is used by the ORDER BY clause in the SQL database to sort records.

```
< DBTable:MYTABLE >
  DefaultTag =
```

For the DefaultTag option, enter the name of the key from the DFD file. Keep in mind this only works with ODBC and DB2. It does not work with xBase files.

Trigger2Archive control group

The Trigger2Archive control group designates the fields in the NEWTRN DAT file (right side) that are copied to the columns in the APPIDX table (left side) during the GenArc process. Remember that the APPIDX table columns are defined by the APPIDX member of DEFLIB and that this APPIDX member is in a DFD format. For the sample resources, the Trigger2Archive control group might be set up as follows:

```
< Trigger2Archive >
```

```
Company      = Company  
Lob          = Lob  
PolicyNum    = PolicyNum  
RunDate      = RunDate
```

Changing the JCL for Host Archive

Examine the GenArcDX member of JCLLIB. Make sure the JCL is appropriate for your site and that the dataset names correspond to the names you have used for your files. Additionally, make sure the DB2 subsystem name and other DB2 object names, such as the plan names, are correct.

ARCHIVING TO DOCUMANAGE

Configuring the system to archive to Documanager involves performing these tasks:

- Setting up Documanager (see the Documanager manuals for more information)
- Modifying the FSISYS file (FSISYSM member in DEFLIB)
- Adding IP addresses and system/domain names of the Documanager machine to the TCPIP host data sets
- Making JCL changes

Modifying the FSISYS File

NOTE: All references of the FSISYS file in this topic refer to FSISYSM member in DEFLIB.

In the ArcRet control group, the FSISYS file includes the values shown here:

```
< ArcRet >
  AppIdxDfd      = AppIdx
  AppIdx         = APPIDX
  CARFile        = ARCHIVE
  CARFileDFD     = CARFILE
  CARPath        =
; Catalog        = CATALOG
; RestartTable   = RESTART
```

For archiving to Documanager, you need to set the CARFileDFD option to *CARFILE* (which resides in DEFLIB) and comment out both the Catalog and RestartTable options.

The Archival control group in the FSISYS file should have these values:

```
< Archival >
  ArchiveMem      = Yes
  UseRestartTable = No
```

For archiving to Documanager, set the UseRestartTable option to No.

In the following DBTable control groups, the FSISYS file should have these values:

```
< DBTable:APPIDX >
  DBHandler       = DMIA
< DBTable:ARCHIVE >
  DBHandler       = DMIA
```

NOTE: You must use *DMIA* as a DBHandler for archiving to Documanager.

The DBHandler:DMIA control group tells the GenArc program that DMIA is used to access Documange during the GenArc process. Your FSISYS file includes these values:

```
< DBHandler:DMIA >
  RPCHost      = (IP address of the Documange machine)
  Cabinet      = RPEX1OS390
  Domain       = (system/domain name)
  UserID       = (Documange user ID)
  Password     = (Documange password)
; Debug       = Max
```

You will need to add the IP address, system/domain name, user ID, and password to the appropriate INI options.

NOTE: For whichever cabinet name is being set in the DBHandler:DMIA control group, you must include that name in the DMIA control group name. RPEX1OS390 is the cabinet name in this case. So, the DMIA control group name would be *DMIA:RPEX1OS390*.

For the DMIA:RPEX1OS390 control group, the FSISYS file includes these values:

```
< DMIA:RPEX1OS390 >
  FileType     = DPA
  FolderBy     = company,lob,policynum
  NameDocBy    = arckey
  StackedDPA   = Yes
```

Adding IP Addresses and System/Domain Names

To add the IP addresses and system/domain names of the Documange machine to the TCPIP host datasets, set the StackedDPA option to No when archiving to Documange.

You will need to add the IP address and system/domain name of your Documange machine to the local TCPIP host data sets on your OS/390. The steps below are examples you could follow to accomplish this task.

NOTE: You first may need to consult your OS/390 system programmer on how to get this task done as the steps you need to do may differ from below.

- 1 Add an entry with your IP and system/domain name to hlq.HOSTS.LOCAL.
- 2 Execute a TSO MAKESITE command to generate hlq.HOSTS.SITEINFO and hlq.HOSTS.ADDRINFO datasets from your hlq.HOSTS.LOCAL.

Changing the JCL

Examine the GenArcX member of JCLLIB. Make sure the JCL is appropriate for your site and that the dataset names correspond to the names you have used for your files.

ARCHIVING USING STACKED DPA

Configuring the system to use stacked DPA to archive to a CARDATA file involves performing these tasks:

- Checking the FSISYS file (FSISYSM member of DEFLIB)
- Making JCL changes

For the DBHandler:DMIA control group below, you do not need to add IP address, system/domain name, user ID, or password to run GenArc with stacked DPA.

```
< DBHandler:DMIA >
  RPCHost      = (IP address of the Documanage machine)
  Cabinet      = RPEX1OS390
  Domain       = (system/domain name)
  UserID       = (Documanage user ID)
  Password     = (Documanage password)
; Debug       = Max
```

In the DMIA:RPEX1OS390 control group, make sure the StackedDPA option is set to Yes.

```
< DMIA:RPEX1OS390 >
  FileType     = DPA
  FolderBy     = company,lob,policynum
  NameDocBy    = arckey
  StackedDPA   = Yes
```

NOTE: All other INI options for archiving to Documanage are the same for stacked DPA.

Changing the JCL

Examine the GenArcX member of JCLLIB. Make sure the JCL is appropriate for your site and that the data set names correspond to the names you have used for your files.

CHECKING YOUR INSTALLATION

To make sure the base system has been installed correctly you should:

- Check the INI files (FSIUSER and FSISYS).
- Check the JCL for the DAPRUN and DAP procedure (or GenTrnX, GenDataX, GenPrtX).
- Run DAPRUN (or GenTrnX, GenDataX, GenPrtX).
- Run archive (GenArcDX or GenArcX). This step is optional.
- Print the output and verify that it appears correct.

NOTE: Two sets of resources are included on the installation tape. The RPEX1 resources are designed for the insurance market and the UTEX1 resources are designed for the utility market. You can verify your installation by running the system using one or both of these sets of resources. When you run the DAPRUN job later in this guide, you will need to specify as part of the jobcard, which set of resources the DAPRUN job is using.

You indicate the resource set by specifying the “// SET RES=xxxxx” statement, where xxxxx is either *RPEX1* or *UTEX1*. By default, the JOBCARD is set up to use the RPEX1 resources.

CHECKING YOUR FSIUSER AND FSISYS SETTINGS

You loaded the FSIUSER and FSISYS members from the tape into the DEFLIB PDS during installation. These two files have similar control groups and options but different purposes. Generally, the FSIUSER member contains customer-specific initialization options while the FSISYS member contains general system-wide options.

Among other things, the FSIUSER and FSISYS members contain the names of various input and output files. On the PC, these file names include the path and file name. On MVS, these names consist of DD statement names or PDS member names or both.

The FSIUSER and FSISYS you uploaded as part of the sample resources are in a format you can run on MVS. To verify these values, consider the following but note that this list of options is not complete.

The relevant value in the FSIUSER INI file is...

```
< Environment >
FSISYSINI = DD:FSISYS
```

The relevant values in FSISYS that indicate the DD names of various libraries, the PDS members, or are required for the system to run are:

```
< BATCH1 >
Printer = Printer1
< BATCH2 >
Printer = Printer2
< BATCH3 >
Printer = Printer3
< Manual >
Printer = Pmanual
< Error >
```

```

Printer = Perror
< CONFIG:Batch Processing >
  CompLib      = DD:COMPLIB()
  DDTLib       = DD:DDTLIB()
  DefLib       = DD:DEFLIB()
  FormDef      = FORM
  FormLib      = DD:FAPLIB()
  XrfFile      = REL95SM
< Control >
  ImageExt     = .FAP
  LogoExt      = .LOG
  XrfExt       = .FXR
< Data >
  DataPath     =
  ExtrFile     = DD:EXTRACT
  DbLogFile    = DD:DBLOGFLE
  ErrFile      = DD:ERRFILE
  LogFile      = DD:LOGFILE
  MsgFile      = DD:MSGFILE
  NAFile       = DD:NAFILE
  NewTrn       = DD:NEWTRN
  PolFile      = DD:POLFILE
  TrnFile      = DD:TRNFILE
  WIPBatch     = DD:MANUAL
  Manual       = DD:MANUAL
  TrnDfdFile   = TrnDfdFl
  AfgJobFile   = DD:AFGJOB
  RcbDfdFile   = RcbDfdFl
  SetRcpTb     = SetRcpTb
  TextTbl      = TextTbl
  TblFile      = TblFile
< Print_Batches >
  Batch1 = DD:BATCH1
  Batch2 = DD:BATCH2
  Batch3 = DD:BATCH3
  Manual = DD:MANUAL
  Error  = DD:ERROR
< Printer >
  PrtType = AFP
  ;PrtType = XER
< Printer1 >
  PORT = DD:PRTBAT1
< Printer2 >
  PORT = DD:PRTBAT2
< Printer3 >
  PORT = DD:PRTBAT3
< PManual >
  PORT = DD:PMANUAL
< PError >
  PORT = DD:PERROR
< PrinterInfo >
  Printer = Printer1
  Printer = Printer2
  Printer = Printer3
  Printer = PManual

```

```

Printer          = PError
< PrtType:XER >
  ColorCharts     = Yes
  CompileInstream = No
  DownloadFonts   = No, Disabled
  InitFunc        = XERInit
  Module          = XERW32
  OutputFunc      = XEROutput
  OutMetFunc      = XEROutMet
  PageNumbers     = Yes
  PrintFunc       = XERPrint
  PrinterInk      = Blue
  TermFunc        = XERTerm
  SendColor       = Yes
  DJDEIden        = A'@@@DJDE'
  DJDEOffset      = 0
  DJDESkip        = 8
  Environment     = MVS
  OutMode         = JES2
  ImageOpt        = Yes
  JDEName         = DFLT
  JDLData         = 0, 255
  JDLHost         = IBMONL
  JDLName         = DFAULT
  JDLCode         = NONE
  JDLRStack       = 0, 10, EQ, X'13131313131313131313'
  JDLRPage        = 0, 5, EQ, X'FFFF26FFFF'Printer control group
< PrtType:AFP >
  SendOverlays    = Yes
< TRN_File >
  MaxExtRecLen     = 119 (for RPEX1 only)
  MaxExtRecLen     = 450 (for UTEX1 only)
  BinaryExt        = N

```

CHECKING THE JCL

As stated in the topic, [Configuring Your Printer Type on page 11](#), when you run the system with the sample resources you can run each step as a separate job (GenTrnX, GenDataX, GenPrintX) or together in sequence using the DAPRUN job which invokes the DAP procedure in PROCLIB.

For the verification test, we recommend you use the DAPRUN job. If you want to use the DAPRUN job and DAP procedure, inspect and modify those files. If you want to run GenTrnX, GenDataX, and GenPrtX separately, inspect and modify those files.

If you plan to use the DAPRUN job...

- 1 Check the DAPRUN job in JCLLIB. This job invokes the DAP procedure. Make sure DAPRUN has a valid jobcard and that the PROCLIB name is correct.
- 2 Check the DAP procedure in PROCLIB. This procedure contains these steps:

Description

GENTRND	deletes files in preparation for the GenTrn program
GENTRN	runs the GenTrn program
GENDATAD	deletes files in preparation for the GenData program
GENDATA	runs the GenData program
GENPRTD	deletes files in preparation for the GenPrint program
GENPRT	runs the GenPrint program

- 3 Check the JCL statements in the DAP procedure and change the dataset names to match the names you chose during installation. Also, change any UNIT names to conform to your site's standards.

Remember that the DD names for various input files (DEFLIB, FAPLIB, TRNFILE, and so on) and output files (BATCH1, NAFILE, and so on) need to correspond to the values that point to these files in the FSISYS file.

You should not need to modify the actual DD names for these files either in the DAP procedure nor in the FSISYS member because these files have been set up to run the verification test as is.

Running GenTrnX, GenDataX, and GenPrtX separately

Look at the GenTrnX, GenDataX and GenPrtX jobs in JCLLIB and modify any jobcards, dataset names, unit names, and so on, so these jobs will run on your system.

Remember that the DD names for various input files (DEFLIB, FAPLIB, TRNFILE, and so on) and output files (BATCH1, NAFILE, and so on) should correspond to the values that point to these files in the FSISYS member. You should not need to modify the actual DD names for these files either in the JCL jobs or in the FSISYS member because these files are set up to run the verification test as is.

RUNNING DAPRUN (OR GENTRNX, GENDATA, AND GENPRTX)

Submit the job DAPRUN. DAPRUN should receive return codes of *00* or *04* in each step. The output for DAPRUN should include logging messages, which are sent to SYSPRINT. Depending on whether you are using the RPEX1 or UTEX1 sample resources, the messages will differ. Examples of both are shown below and on the following pages.

NOTE: If you are running GenTrnX, GenDataX, and GenPrtX separately you should submit each job in sequence and check the return codes.

Running DAPRUNC to Improve Performance

The DAPRUNC job invokes the DAPC procedure in PROCLIB. The DAPC procedure contains JCL that assumes the GenTrn and GenPrint steps have been combined into the GenData step. The GenTrn and GenPrint steps are run as rules within the GenData step. This is called *single-step processing* and can improve system performance. To use single-step processing, submit DAPRUNC. It should receive a return code of *00* or *04* in both steps.

NOTE: When using single-step processing, only the SYSOUT messages for GenData are displayed.

Logging messages when running RPEX1

```

--- GenTrn ---
Filtering extract file...
Building transaction file...
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1
==> Warning count:    0
==> Error   count:    0
Elapsed Time: 3 seconds
--- GenTrn Completed ---

--- GenData ---
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1

```

```
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1
==> Warning count:    0
==> Error   count:    0
Elapsed Time: 44 seconds
--- GenData Completed ---

--- GenPrint ---
Processing Batch:<BATCH1> File:<DD:BATCH1> Port:<DD:XERBAT1>
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1
9 records processed in BATCH1 batch.
Processing Batch:<BATCH2> File:<DD:BATCH2> Port:<DD:XERBAT2>
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1
9 records processed in BATCH2 batch.
Processing Batch:<BATCH3> File:<DD:BATCH3> Port:<DD:XERBAT3>
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
7 records processed in BATCH3 batch.
Processing Batch:<ERROR> File:<DD:ERROR> Port:<DD:PEROR>
Processing Batch:<MANUAL> File:<DD:MANUAL> Port:<DD:PMANUAL>
==> Warning count:    3
==> Error   count:    0
Elapsed Time: 49 seconds
--- GenPrint Completed ---
```

Logging messages when running UTEX1

```

--- GenTrn ---
Filtering extract file...
Building transaction file...
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 2222-3445-UTIL-BILL--
==> Processing: 1234-5555-UTIL-BILL--
==> Processing: 3456-7777-UTIL-BILL--
==> Processing: 3999-9999-UTIL-BILL--
==> Processing: 4444-1234-UTIL-BILL--
==> Processing: 4999-R777-UTIL-BILL--
==> Processing: 5111-8888-UTIL-BILL--
==> Processing: 5555-7010-UTIL-BILL--
==> Processing: 6750-R758-UTIL-BILL--
==> Processing: 7000-7000-UTIL-BILL--
==> Processing: 2428-1927-UTIL-BILL--
==> Processing: 8234-5555-UTIL-BILL--
==> Warning count:    0
==> Error   count:    0
Elapsed Time: 3 seconds
--- GenTrn Completed ---

--- GenData ---
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 2222-3445-UTIL-BILL--
==> Processing: 1234-5555-UTIL-BILL--
==> Processing: 3456-7777-UTIL-BILL--
==> Processing: 3999-9999-UTIL-BILL--
==> Processing: 4444-1234-UTIL-BILL--
==> Processing: 4999-R777-UTIL-BILL--
==> Processing: 5111-8888-UTIL-BILL--
==> Processing: 5555-7010-UTIL-BILL--
==> Processing: 6750-R758-UTIL-BILL--
==> Processing: 7000-7000-UTIL-BILL--
==> Processing: 2428-1927-UTIL-BILL--
==> Processing: 8234-5555-UTIL-BILL--
==> Warning count:    0
==> Error   count:    0
Elapsed Time: 148 seconds
--- GenData Completed ---

--- GenPrint ---
Processing Batch:<BATCH1> File:<DD:BATCH1> Port:<DD:AFPBAT1>
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 2222-3445-UTIL-BILL--
==> Processing: 1234-5555-UTIL-BILL--
==> Processing: 3456-7777-UTIL-BILL--
==> Processing: 3999-9999-UTIL-BILL--
==> Processing: 4444-1234-UTIL-BILL--
==> Processing: 4999-R777-UTIL-BILL--
==> Processing: 5111-8888-UTIL-BILL--
==> Processing: 5555-7010-UTIL-BILL--
==> Processing: 6750-R758-UTIL-BILL--
==> Processing: 7000-7000-UTIL-BILL--

```

```
==> Processing: 2428-1927-UTIL-BILL--
==> Processing: 8234-5555-UTIL-BILL--
12 records processed in BATCH1 batch.
Processing Batch:<BATCH2> File:<DD:BATCH2> Port:<DD:AFPBAT2>
Processing Batch:<BATCH3> File:<DD:BATCH3> Port:<DD:AFPBAT3>
Processing Batch:<ERROR> File:<DD:ERROR> Port:<DD:PEERROR>
Processing Batch:<MANUAL> File:<DD:MANUAL> Port:<DD:PMANUAL>
==> Warning count:    5
==> Error   count:    0
Elapsed Time: 75 seconds
--- GenPrint Completed ---
```


RUNNING GENARCDX

This task is optional.

The JCLLIB member GenArcDX (GenArcX prior to version 10.3) executes the GenArc program in two steps. The first step, called *GenArcD*, executes the IEFBR14 program and contains DD statements that delete various files which will be created in the following GenArc step. The second step, called *GenArc*, executes the TSO Terminal Monitor Program and starts the DB2 Command Processor program (DSN) which runs the GenArc program and DB2 plan.

At the bottom of the GenArcDX job, the SYSTSIN DD statement has some in-stream control cards, one of which indicates the LINKLIB you loaded from tape. Change &HLQ..LINKLIB to match the name you gave the LINKLIB you loaded from the tape. Also, you'll need to change the subsystem name from *TDB1* to match your DB2 subsystem name.

```
//SYSTSIN DD *
DSN SYSTEM(TDB1)
RUN PROGRAM(GENARC) PLAN(DAP110) -
      LIB('&HLQ..LINKLIB')
END
```

To test, submit the GenArcDX job. The GenArcDX job should receive a return code of *00* or *04*. The output for the GenArcDX job should include logging messages (sent to SYSPRINT) similar to the following messages.

RPEX1 messages

```
--- GenArc ---
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1

==> Transactions Read      :      9
==> Transactions Archived :      9
==> Transactions In Error  :      0
==> Transactions Rolled Back:      0

==> Warning count:      1
==> Error  count:      0

Elapsed Time: 44 seconds
--- GenArc Completed ---
```

UTEX1 messages

```
--- GenArc ---

==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 2222-3445-UTIL-BILL--
==> Processing: 1234-5555-UTIL-BILL--
==> Processing: 3456-7777-UTIL-BILL--
==> Processing: 3999-9999-UTIL-BILL--
==> Processing: 4444-1234-UTIL-BILL--
==> Processing: 4999-R777-UTIL-BILL--
==> Processing: 5111-8888-UTIL-BILL--
==> Processing: 5555-7010-UTIL-BILL--
==> Processing: 6750-R758-UTIL-BILL--
==> Processing: 7000-7000-UTIL-BILL--
==> Processing: 2428-1927-UTIL-BILL--
==> Processing: 8234-5555-UTIL-BILL--

==> Transactions Read      :      12
==> Transactions Archived :      12
==> Transactions In Error  :        0
==> Transactions Rolled Back:        0

==> Warning count:      0
==> Error   count:      0

Elapsed Time: 34 seconds
--- GenArc Completed ---
```

RUNNING GENARCX

This task is optional.

The JCLLIB member GenArcX executes the GenArc program in two steps. The first step, called GenArcD, executes the IEFBR14 program and contains DD statements that delete various files which will be created in the following GenArc step. The second step, called GenArc, executes the GenArc program to archive to Documange or to a CARDATA file if you are using stacked DPA.

To test, submit the GenArcX job. The GenArcX job should receive a return code of 00 or 04. The output for the GenArcX job should include logging messages (sent to SYSPRINT) similar to the following messages if you are using stacked DPA.

RPEX1 messages

```

--- GenArc ---
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: 1234567-SAMPCO-LB1--T1
==> Processing: 2234567-SAMPCO-LB1--T1
==> Processing: 5SAMPCO-SAMPCO-LB2--T1
==> Processing: 6SAMPCO-SAMPCO-LB2--T1
==> Processing: 7SAMPCO-SAMPCO-LB2--T1
==> Processing: 8SAMPCO-SAMPCO-LB2--T1
==> Processing: 9SAMPCO-SAMPCO-LB2--T1
==> Processing: 4234567-FSI-CPP--T1
==> Processing: 5234567-FSI-GL--T1
==> Transactions Read      :      9
==> Transactions Archived :      7
==> Transactions In Error :      0
==> Transactions Rolled Back:      0
==> Warning count:      1
==> Error count:      0
Elapsed Time: 27 seconds
--- GenArc Completed ---

```

UTEX1 messages

```

--- GenArc ---
==> Processing: TransactionId-GroupName1-GroupName2-GroupName3-
TransactionType
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Processing: -UTIL-BILL--
==> Transactions Read      :     12
==> Transactions Archived :     12
==> Transactions In Error :      0
==> Transactions Rolled Back:      0
==> Warning count:      1
==> Error count:      0
Elapsed Time: 66 seconds
--- GenArc Completed ---

```

PRINTING THE OUTPUT

When you performed the tasks discussed in the topic, [Running DAPRUN \(or GenTrnX, GenDataX, and GenPrtX\) on page 37](#), DAPRUN should have produced three print-ready files. These files would be referenced as shown in the following table:

If you configured your system for... You will see these default DD names...

Xerox Metacode	PRTBAT1, PRTBAT2, and PRTBAT3
IBM AFP	PRTBAT1, PRTBAT2, and PRTBAT3
PostScript	PRTBAT1, PRTBAT2, and PRTBAT3
PDF	PDFLIB(BAT10000), PDFLIB(BAT20000), and PDFLIB(BAT30000)

Consult the appropriate topic below to send the output to the type of printer you are configured for.

Xerox Metacode printer

If you configured the system to create Xerox Metacode, use the GENERXER member of JCLLIB to *IEBGENER* the print files to JES. Make any changes necessary in this member to match your MVS environment.

BARR-attached Metacode printer

If you have a Metacode printer attached to your local area network (LAN) and you are using the BARR interface, you must first *BARRWRAP* the output print stream, then send this print stream to the printer's spool area.

To *BARRWRAP* the output print stream, run the *BARRWRPX* utility. You'll find an example of this utility in JCLLIB. Then download the resulting file to your LAN. Be sure to download without carriage returns or line feeds (CRLF) and without ASCII translation. Once the file is downloaded, copy it to the BARR SPOOL area.

IBM AFP printer

If you have configured the system to create an IBM AFP data stream, use the GENERAFP member of JCLLIB to *IEBGENER* the print files to JES. Make any changes necessary in this member to match your MVS environment.

OPTIMIZING PERFORMANCE

This topic will help you configure your system for optimum performance. To gather the following recommendations, we first created benchmarks on a test system. Then, by changing different parameters of that system, we measured performance gains or losses. Here are some of the terms we used during this exercise:

CPU TIME. The amount of time that a program, such as GenTrn, GenData, or GenPrint, uses the CPU. In a multi-tasking operating system like MVS, there are many tasks competing for use of the CPU.

EXCPs. Execute Channel Programs. We have used these counts as basic measurements of I/O activity.

WALL CLOCK TIME. The elapsed time, as measured from the time a program begins to the time that the program ends. This *wall clock time* can vary significantly from one run to another.

BATCH WINDOW. Most installations have specific times of the day or night when large batch processes, like this system, are scheduled to run. The time frame in which these processes run is sometimes referred to as the *batch window*. A batch window is measured in *wall clock time*, such as from 10:00 pm to 5:00 am. Your system installation should run fast enough to complete its processing within the *batch window*.

Most, but not all, of the following recommendations are the result of many tests and subsequent improvements designed for a hypothetical user. The characteristics of Documaker Server implemented for this hypothetical user are as follows:

- Extract file with large record length (approximately 25,000 bytes/record).
- Form sets composed with large number of individual images.
- Large number of different recipients (approximately 300).
- Moderate number of transactions (approximately 4,000)

COMPILE OPTIONS

If your license included source code, use the following information when compiling your system for best results.

OPTIMIZE Use the highest level of C optimization by passing the following option to the compiler:

Use	If you are using
OPT(1)	C/C++ For MVS/ESA, 1 is the highest level
OPT(2)	either of the other C/370 compilers

NOVALIDATEHANDLE Specify NOVALIDATEHANDLE by passing the following option to the compiler:

DEF(NOVALIDATEHANDLE)

INLINE The INLINE option can produce performance gains but there are other activities required for it to work.

LANGUAGE ENVIRONMENT (LE) OR C/370 RUNTIME OPTIONS

Use the following runtime options:

REPORT You can use the REPORT option to gather information on various values reached when you run a particular program, such as GenData or GenPrint. There is overhead involved in running with this option.

Do not use the REPORT option in production runs. Use the REPORT option during testing to report runtime values, then use these values to assess the need to run with additional runtime options such as HEAP.

HEAP Based on the values received from running with the REPORT option, you may choose to specify the HEAP run-time option, modifying the initial and incremental heap allocations as the values from REPORT would recommend. You would then want to remove the REPORT option.

If time permits, set HEAP values based on the values received from running with the REPORT option.

FILE TYPES AND CHARACTERISTICS

Block sizes Best results have been achieved by specifying large block sizes. In general, try to use half-track block size—that is, if you are creating files on a 3380-type device (which has a track size of 47,476 bytes), specify a block size around 23,500. A half-track block size for a 3390-type device (which has a track size of 56,664 bytes) would be around 28,000.

Specify half-track block sizes for all files.

Record formats *FB* stands for the *fixed block* record format and *FBS* stands for the Fixed Block Standard record format. The record format is specified on the JCL DD statement when a particular file is defined. The C function, *fseek*, appears to be able to seek more quickly to a location in a file if that file is defined with a record format of FBS instead of FB.

The *standard* keyword guarantees that all the blocks of a file will be of the stated block size length and that there will be no *short* blocks.

If you are choosing between record formats of FB and FBS for any of these files, choose FBS: EXTRACT, TRNFILE.DAT, NEWTRN.DAT, NAFILE.DAT, and POLFILE.DAT.

As for the size of record blocks, the larger the record length, the fewer records per block. For FBS, this results in additional EXCPs and slower performance.

Number of files As mentioned earlier, the total run-time, or *wall clock time* of a job is increased as more files are created, opened, and closed. An additional 10 or 20 files may have no significant affect on the wall time but if your system has to create, open and close hundreds of files, the wall time will lengthen significantly.

Design your system with a minimal number of recipient batch and print files. For instance, try to keep the number of recipient files to less than 20 or so. See also the [AliasPrintBatches option on page 51](#).

Extract Files

The standard extract file is usually defined with a record format of fixed block standard (FBS) with a half-track block size.

Defining the extract file as a VSAM ESDS You may choose to define the extract file to be a VSAM Entry Sequenced Data Set (ESDS). See [Defining the Extract File as a VSAM ESDS on page 52](#) for more information.

DEFLIB

The standard DEFLIB is created as a Partitioned Data Set (PDS), or as a Partitioned Data Set Extended (PDS/E). The best performance results have been achieved with DEFLIB defined with a Variable Blocked (VB) record format.

Placing DDT files into a VSAM KSDS DEFLIB contains DDT files, DFD files, SETRCPTB, FORMDAT, various tables, and so on. You can move the DDT files into a VSAM KSDS by running the program PDS2VSAM. See [Moving DDT Files into a VSAM KSDS on page 54](#) for more information.

SETRCPTB

Moving the SETRCPTB member into a VSAM KSDS

You can move the set recipient table member, SETRCPTB, into a VSAM KSDS by running the RCP2VSAM utility. See [Moving SETRCPTB to a VSAM KSDS on page 60](#) for more information.

FAPLIB

Define the FAPLIB file as variable blocked (VB) with a half-track block size.

TRNFILE

Define the transaction trigger file (TRNFILE) file as fixed block standard (FBS) with a half-track block size.

NEWTRN

Define the updated transaction trigger file (NEWTRN) file as fixed block standard (FBS) with a half-track block size.

NAFILE

Define the NAFILE file as fixed block standard (FBS) with a half-track block size or use VSAM to create and read from the NAFILE as outlined below.

Creating a NAFILE as a VSAM file

The NAFILE can be created in the GenData step as a VSAM key sequenced data set (KSDS), then read in the GenPrint step. Actually, NAFILE and POLFILE function as a pair so that they must both be either VSAM or non-VSAM. See [Creating NAFILES and POLFILES as VSAM KSDSs on page 62](#) for the steps required to create the NAFILE/ POLFILE files as VSAM files.

POLFILE

Define the POLFILE file as fixed block standard (FBS) with a half-track block size or use VSAM to create and read from the POLFILE as outlined in the section below.

Creating a POLFILE as a VSAM file

The POLFILE can be created in the GenData step as a VSAM key sequenced data set (KSDS), then read in the GenPrint step. See [Creating NAFILES and POLFILES as VSAM KSDSs on page 62](#) for the steps required to create the NAFILE.DAT and POLFILE.DAT files as VSAM files.

Recipient Batch Files

As mentioned earlier, the fewer recipient batch files you have the better the performance. Define the recipient batch files as *fixed block standard* (FBS) with a half-track block size. A rule of thumb is to try to keep the number of recipient batch files under 20. If it is necessary to design the system as having many recipient batch files you may consolidate these logical groupings into a single *physical* recipient batch file. See [AliasPrintBatches option on page 51](#) for more information.

Pre-compiled Xerox Metacode Files (PMETLIB)

The standard PMETLIB is created as a PDS or PDS/E. If you are using a PDS or PDS/E, define PMETLIB with a record format of VB and with a half-track block size.

Placing PMETs into a VSAM KSDS

You can move the PMETs into a VSAM KSDS by running the program PDS2VSAM. See [Moving PMETs into a VSAM KSDS on page 58](#) for the steps to accomplish this task.

Print Files

Define the print files as Variable Blocked Machine (VBM) control codes, with a record length near 255 for Xerox or 8205 for AFP, and a half-track block size.

SETTING YOUR FSISYS INI OPTIONS

Caching Options

The following options attempt to minimize the repeated opening and closing of frequently used files (actually, PDS members in MVS) by retaining, or caching, file handles and file data. In many cases the defaults are sufficient but for specific cases, where many different Images are used, these caching values may be increased to improve performance.

Caching FAP files

In some cases, FAP files (image definitions) are loaded from the FORMLIB or FAPLIB PDS during GenData processing. The cache feature keeps frequently used FAP members available for re-use. Here is an example of how you set up the cache feature:

```
< Control >
CacheFAPFiles = 100
```

The default is 100. Accept the default value *unless* you are loading FAP files in GenData using the CompileInStream FSISYS INI option (set to Yes) and you are using more than 100 FAP files and/or logo files.

DDT files

Data definition table (DDT) members are loaded from the DDTLIB or DEFLIB PDS during GenData processing. The cache feature keeps frequently used DDT members available for re-use. Here is an example of how you set up the cache feature:

```
< Control >
RuleFilePool = 100
```

The default is 100. Accept the default value unless you are using more than 100 DDT files.

Using/Caching Xerox PMET files

MET files contain pre-compiled Xerox Metacode information produced by the FAP2MET utility. The GenPrint program loads MET members from the PMETLIB PDS. The cache option keeps frequently used MET members available for re-use. Here is an example of how you set up the cache feature:

```
< PrtType:XER >
  CacheFiles      = 100
  CompileInstream= No
```

The default is 100. Accept the default *unless* you are using pre-compiled FAP files you are using more than 100 FAP files and/or logo files.

Using AFP Overlays

For best performance, you should run the FAP2OVL utility, compiling FAPs into AFP overlays. Tell the system to use the overlays by specifying:

```
< PrtType:AFP >
  SendOverlays= Yes
```

LOGGING OPTIONS

LogTransactions option

The GenTrn, GenData, and GenPrint programs optionally place transaction information into a LOG file. In most situations, this information is not needed. The LogTransactions option is specified in:

```
< Control >
  LogTransactions = No
```

The default is Yes.

For optimum performance, specify **No**.

LogToConsole option

The GenTrn, GenData, and GenPrint programs optionally place transaction information in the SYSPRINT DD statement you specified in the job's JCL. In most situations, this information is not needed. The LogToConsole option is specified in:

```
< Control >
  LogToConsole = No
```

The default is Yes.

For optimum performance, specify **No**.

DEBUG OPTIONS

If_Rule control group

```
< If_Rule >
  Debug_if = No
```

The default is **Yes**.

For optimum performance, specify **No**.

RunMode control group

For these run options:

```
< RunMode >
  DownloadFAP = No
  LoadCordFAP = No
  CompiledFAP = Yes
```

The defaults are...

```
DownloadFAP = No
LoadCordFAP = No
CompiledFAP = Yes
```

Set the DownloadFAP option to **No**, the LoadCordFAP option to **No**, and the CompileFAP option to **Yes** for the best performance.

OTHER OPTIONS

MaxRecsPerTransaction option

```
< ExtractFile >
  MaxRecsPerTransaction = nn
```

The default is zero (0) and there is no maximum. Be careful using this option. You might want to use this option if you *know* that each record in the extract file corresponds to a transaction.

AliasPrintBatches option

```
< ExtractFile >
  AliasPrintBatches = Yes
```

The default is **No**. Use the default.

DEFINING THE EXTRACT FILE AS A VSAM ESDS

The extract file is generally defined as a Fixed Blocked Standard (FBS) file, with the record length depending on the particular implementation. There are circumstances when you might want to define the extract file as a VSAM Entry Sequenced Data Set (ESDS) instead of an FBS file.

Follow the steps below to move the extract file into a VSAM ESDS.

- 1 Execute the job in member EXTESDS in the JCLLIB dataset. Modify the member as appropriate for your site. The EXTESDS job first uses the IBM program IDCAMS to delete and re-define the VSAM extract file and then uses IDCAMS to copy the (non-VSAM) extract file to the VSAM extract file. Set the RecordSize parameter to the exact record length of the extract file. This job should receive a condition code of 00 in each step.
- 2 Since the name of the VSAM extract file will probably differ from the name of the non-VSAM extract file, change the DAP procedure in PROCLIB (or the GenTrnX and GenDataX JCLLIB members if you are using those jobs) to reference the new name of the extract file. There should be a reference to the extract file in both the GenTrn and GenData steps of the DAP procedure.
- 3 Modify the FSISYS INI file as follows:

```
< TRN_FILE >
MaxExtReclen= (the exact record size of the VSAM extract file. The
               maximum LRECL (Logical Record Length) for a dataset
               is 32760-32K minus 8 bytes)
BinaryExt=YES
```

The EXTESDS member of JCLLIB is shown below:

```
/* COPY JOBCARD HERE
/* * * * * *
/*      EXTESDS -
/*
/*      THIS JOB PERFORMS 2 STEPS :
/*
/*      1.  DELETE / DEFINE NEW EXTRACT FILE AS VSAM ESDS.
/*      2.  REPRO EXISTING SEQUENTIAL EXTRACT FILE INTO NEW
/*          ESDS EXTRACT FILE.
/*      3.  &HLQ..&RES.. CANNOT BE USED INSTREAM, PLEASE
/*          REPLACE THE OCCURRENCES IN THE SYSIN DD
/*          STATEMENT WITH THE APPROPRIATE VALUES.
/*
/* * * * * *
//DEFINE EXEC PGM=IDCAMS,REGION=4M
//SYSPRINT DD SYSOUT=*
//SYSIN DD *

DEL      &HLQ..&RES..EXTRACT.ESDS

DEFINE CLUSTER(NAME(&HLQ..&RES..EXTRACT.ESDS)  +
              CYL(25 5)                        +
              NONINDEXED                       +
              REUSE )                          +
```

```
DATA (NAME (&HLQ..&RES..EXTRACT.ESDS.DATA) +  
      RECORDSIZE(??? ???) )  
  
IF LASTCC = 0 THEN SET MAXCC = 0  
  
/*  
/*  
//REPRO EXEC PGM=IDCAMS,REGION=4M  
//SYSPRINT DD SYSOUT=*  
//DD1 DD DSN=&HLQ..&RES..EXTRACT,DISP=SHR  
//DD2 DD DSN=&HLQ..&RES..EXTRACT.ESDS,DISP=SHR  
//SYSIN DD *  
      REPRO INFILE(DD1) OUTFILE(DD2)
```

MOVING DDT FILES INTO A VSAM KSDS

DDT files normally reside as members in the DDTLIB or DEFLIB PDS. The DEFLIB PDS also contains other types of members, such as SETRCPTB, FORMDAT, FXR, FSISYS and various tables. These other types of members should not be copied to the VSAM KSDS, but it probably won't hurt anything if they are copied—so step 1 is optional.

Follow the steps below to move the DDTs in DEFLIB to a VSAM KSDS.

- 1 You can use the ALLOCDDT job in JCLLIB to define a “DDTLIB PDS” (to contain only DDT files) and to copy the DDT files for the sample resource from DEFLIB into this new PDS. Once you have all the DDT files in a separate (non-VSAM) PDS, proceed to step 2.

If you are moving your own resources (not the sample resources), copy your DDT files into this DDTLIB.

- 2 Execute the PDS2VSDX job that resides in the JCLLIB PDS. The job consists of these steps:
 - The IDCAMS step deletes/re-defines the VSAM KSDS that the DDT files will be copied into.
 - The PDS2VSAM step reads the DDTLIB PDS created in step 1 and copies the DDT files to the VSAM KSDS defined in the IDCAMS step.

The PDS2VSDX job is shown below:

```
//* COPY JOBCARD HERE
//* * * * *
//* JOB PERFORMS 2 STEPS :
//*
//*      1.  DELETES / RE-DEFINES DDTVSAM KSDS.
//*      2.  RUNS PDS2VSAM PROGRAM TO COPY DDT MEMBERS INTO
//*           DDTVSAM
//*
//*      PRIOR TO RUNNING THIS JOB YOU SHOULD HAVE RUN
//*      THE JOB IN THE "ALLOCDDT" MEMBER OF JCLLIB TO
//*      ALLOCATE A NON-VSAM DDTLIB AND COPY THE DDT'S
//*      FROM DEFLIB INTO IT.
//*
//* NOTE: THE &HLQ AND &RES WITHIN INSTREAM JCL WILL NOT
//*        WORK. PLEASE REPLACE THE &HLQ AND &RES WITH
//*        THEIR RESPECTIVE VALUES.
//*
//* * * * * *
//*
//IDCAMS EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN DD *

DELETE &HLQ..&RES..DDTVSAM CLUSTER

DEFINE CLUSTER
( NAME(&HLQ..&RES..DDTVSAM)
  CYL(25 5)
  REUSE
```

```

        SHAREOPTIONS(2 3) )           -
DATA                                     -
    ( NAME(&HLQ..&RES..DDTVSAM.DATA) -
      RECORDSIZE(2048 2048)           -
      CONTROLINTERVALSIZE(4096)      -
      FREESPACE(0 10)                -
      KEYS(16 0) )                   -
INDEX                                   -
    ( NAME(&HLQ..&RES..DDTVSAM.INDEX) )

IF LASTCC = 00 THEN SET MAXCC = 00

/*
//PDS2VSAM EXEC PGM=PDS2VSAM
//STEPLIB DD DISP=SHR,DSN=&HLQ..LINKLIB
//          DD DISP=SHR,DSN=SYS1.SCEERUN
//SYSOUT DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//PDSIN DD DSN=&HLQ..&RES..DDTLIB,DISP=SHR
//VSAMOUT DD DSN=&HLQ..&RES..DDTVSAM,DISP=SHR

```

3 Add this option to the FSISYS INI file:

```

< VSAM >
    DDTVSA M = DD:DDTVSA M

```

The DD name you use to associate with the VSAM DDT file is up to you. This INI option tells the system to open and read the DDT file using VSAM.

4 Modify the JCL for the GenData step so the DDTVSA M DD statement is in that step and references the VSAM KSDS created for the DDT files in step 2. If you are using the DAP procedure in PROCLIB, add the appropriate DD statement to that procedure.

If, you are executing each step as a separate job, add the DD statement to the GenDataX job.

MOVING JDTs INTO A VSAM KSDS

The Job Definition Table (JDT) normally resides as member AFGJOB in the DEFLIB PDS. You can move this member (and other JDT members if you have several) into its own VSAM KSDS, similar to the VSAM KSDS used for DDT files.

Follow these steps to move the JDT files in DEFLIB to a VSAM KSDS.

- 1 You can use the ALLOCJDT job in JCLLIB to define a JDTLIB PDS (to contain only JDT files) and to copy the JDT files for the sample resource from DEFLIB into this new PDS. Once you have all the JDTs in a separate (non-VSAM) PDS proceed to step 2.

If you are moving your own resources (not the sample resources), copy your JDT files into this JDTLIB.

- 2 Execute the PDS2VSJX job that resides in the JCLLIB PDS. The job consists of these steps:

- The IDCAMS step deletes/re-defines the VSAM KSDS that the JDT files will be copied into.
- The PDS2VSAM step reads the JDTLIB PDS created in step 1 and copies the JDTs to the VSAM KSDS defined in the IDCAMS step.

The PDS2VSJX job is shown below:

```
//* COPY JOBCARD HERE
/* * * * * *
/* JOB PERFORMS 2 STEPS :
/*
/*      1.  DELETES / RE-DEFINES JDTVSAM KSDS.
/*      2.  RUNS PDS2VSAM PROGRAM TO COPY JDT MEMBERS INTO
/*          JDTVSAM
/*
/*      PRIOR TO RUNNING THIS JOB YOU SHOULD HAVE RUN THE
/*      JOB IN MEMBER "ALLOCJDT" OF JCLLIB TO ALLOCATE A
/*      NON-VSAM JDTLIB AND COPY THE JDT MEMBER(S) INTO IT.
/*
/*      NOTE: THE &HLQ AND &RES WITHIN INSTREAM JCL WILL NOT
/*            WORK. PLEASE REPLACE THE &HLQ AND &RES WITH
/*            THEIR RESPECTIVE VALUES.
/*
/* * * * * *
/*
/*IDCAMS EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN DD *

DELETE &HLQ..&RES..JDTVSAM CLUSTER

DEFINE CLUSTER
( NAME(&HLQ..&RES..JDTVSAM)
  CYL(25 5)
  REUSE
  SHAREOPTIONS(2 3) )
DATA
( NAME(&HLQ..&RES..JDTVSAM.DATA) -
```



```

                                RECORDSIZE(2048 2048)          -
                                CONTROLINTERVALSIZE(4096)       -
                                FREESPACE(0 10)                 -
                                KEYS(16 0)                      -
INDEX                                                                    -
    ( NAME(&HLQ..&RES..JDTVVSAM.INDEX) )

IF LASTCC = 00 THEN SET MAXCC = 00

/*
//PDS2VSAM EXEC PGM=PDS2VSAM
//STEPLIB DD DISP=SHR,DSN=&HLQ..LINKLIB
//          DD DISP=SHR,DSN=SYS1.SCEERUN
//SYSOUT DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//PDSIN DD DSN=&HLQ..&RES..JDTLIB,DISP=SHR
//VSAMOUT DD DSN=&HLQ..&RES..JDTVVSAM,DISP=SHR

```

3 Add this option to the FSISYS INI file:

```

< VSAM >
    JDTVVSAM = DD:JDTVVSAM

```

The DD name you associate with the VSAM JDT file is up to you. This INI option tells the system to open and read the JDT file using VSAM.

4 Modify the JCL for the GenData step so that the JDTVVSAM DD statement is in that step and references the VSAM KSDS that was created for the JDT files in step 2. If you are using the DAP procedure in PROCLIB add the appropriate DD statement to that procedure. If, on the other hand, you are executing each step as a separate job, add the DD statement to the GenDataX job.

MOVING PMETs INTO A VSAM KSDS

Pre-compiled Metacode files normally reside as members in the PMETLIB PDS. Follow the steps below to move the PMETs in PMETLIB to a VSAM KSDS.

- 1 Execute the following PDS2VSPX job, changing any necessary values to fit your environment. This job resides in the JCLLIB PDS and consists of these steps:
 - The IDCAMS step deletes/re-defines the VSAM KSDS the PMETs will be copied into.
 - The PDS2VSAM step reads the PMETLIB PDS and copies the PMET members to the VSAM KSDS defined in the previous step.

```
//* COPY JOBCARD HERE
/* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
/* JOB PERFORMS 2 STEPS :
/*
/*      1.  DELETES / RE-DEFINES PMETVSAM KSDS.
/*      2.  RUNS PDS2VSAM PROGRAM TO COPY PMET MEMBERS INTO
/*          PMETVSAM
/*      3.  THE DEFAULT INPUT / OUTPUT DD NAMES ARE "PDSIN" AND
/*          "VSAMOUT", RESPECTIVELY. IF YOU WISH TO OVERRIDE
/*          THESE NAMES PASS THE EXECUTE PARAMETER :
/*          PARM= ' / I=DD:INPUTDD /O=DD:OUTPUTDD'
/*
/* NOTE: THE &HLQ AND &RES WITHIN INSTREAM JCL WILL NOT
/*       WORK. PLEASE REPLACE THE &HLQ AND &RES WITH
/*       THEIR RESPECTIVE VALUES.
/*
/* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
/*
/*IDCAMS EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN DD *

DELETE &HLQ..&RES..PMETVSAM CLUSTER

DEFINE CLUSTER                                -
( NAME(&HLQ..&RES..PMETVSAM)                -
  CYL(25 25)                                -
  REUSE                                      -
  SHAREOPTIONS(2 3) )                        -
DATA                                         -
( NAME(&HLQ..&RES..PMETVSAM.DATA) -
  RECORDSIZE(2048 2048)                      -
  CONTROLINTERVALSIZE(4096)                  -
  FREESPACE(0 10)                            -
  KEYS(16 0) )                               -
INDEX                                       -
( NAME(&HLQ..&RES..PMETVSAM.INDEX) )

IF LASTCC = 00 THEN SET MAXCC = 00

/*
/*
```

```
//PDS2VSAM EXEC PGM=PDS2VSAM
//STEPLIB DD DISP=SHR,DSN=&HLQ..LINKLIB
// DD DISP=SHR,DSN=SYS1.SCEERUN
//SYSOUT DD SYSOUT=*
//SYSPRINT DD SYSOUT=*
//PDSIN DD DSN=&HLQ..&RES..PMETLIB,DISP=SHR
//VSAMOUT DD DSN=&HLQ..&RES..PMETVSAM,DISP=SHR
```

2 Add this option to the FSISYS INI file:

```
< VSAM >
    METVSAM = DD:PMETVSAM
```

The DD name you associate with the VSAM PMET file is up to you. This INI option tells the system to open and read the PMET file using VSAM.

3 Modify the JCL for the GenPrint step so the PMETVSAM DD statement is in that step and it references the VSAM KSDS created for the PMETs in step 1. If you are using the DAP procedure in PROCLIB, add the appropriate DD statement to that procedure. If you are executing each step as a separate job, add the DD statement to the GenPrtX job.

MOVING SETRCPTB TO A VSAM KSDS

Follow the steps below to move the SETRCPTB member from DEFLIB to a VSAM KSDS.

NOTE: Before you run this, please make sure that there are no blank lines at the end of your extract file. Blank lines can cause the following error:

```
DM1002: Error: Required INI definition omitted.
Cannot locate INI group <Key1Table> with value = defined.
```

The error appears when you run Documaker Server.

- 1 Execute the following RCP2VSMX job, changing any necessary values to fit your installation. This job resides in the JCLLIB PDS and consists of these steps:
 - The IDCAMS step deletes/re-defines the VSAM KSDS that the SETRCPTB will be copied into.
 - The RCP2VSAM step reads the DEFLIB PDS and copies the SETRCPTB member to the VSAM KSDS defined in the previous step.

```
//* COPY JOBCARD HERE
//* * * * *
//* JOB PERFORMS 2 STEPS :
//*
//*      1. DELETES / RE-DEFINES SETRCPVS KSDS.
//*      2. RUNS RCP2VSAM PROGRAM TO COPY SETRCPTB TO
//*          SETRCPVS KSDS.
//*
//*      DEFAULT INPUT / OUTPUT DD NAMES ARE SETRCPTB AND
//*      SETRCPVS, RESPECTIVELY. YOU CAN OVERRIDE BY
//*      PASSING THE PARM : PARM='/ I=DD:DDIN /O=DD:DDOUT'
//*
//* NOTE: THE &HLQ AND &RES WITHIN INSTREAM JCL WILL NOT
//*      WORK. PLEASE REPLACE THE &HLQ AND &RES WITH
//*      THEIR RESPECTIVE VALUES.
//*
//* * * * *
//DEFINE EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN DD *

DELETE &HLQ..&RES..SETRCPVS CLUSTER

DEFINE CLUSTER
( NAME(&HLQ..&RES..SETRCPVS)
  RECORDSIZE(500 1000)
  KEYS(152 0)
  REUSE
  SHAREOPTIONS(2 3) )
DATA
( NAME(&HLQ..&RES..SETRCPVS.DATA)
  CONTROLINTERVALSIZE(4096)
```

```

                RECORDS(1000 1000)                -
                FREESPACE(0 5) )                  -
INDEX
    ( NAME(&HLQ..&RES..SETRCPVS.INDEX) -
      RECORDS(100 50) )

    IF LASTCC = 00 THEN SET MAXCC = 00
/*
//RCP2VSAM EXEC PGM=RCP2VSAM
//STEPLIB DD DISP=SHR,DSN=&HLQ..LINKLIB
//          DD DISP=SHR,DSN=SYS1.SCEERUN
//SETRCPTB DD DISP=SHR,DSN=&HLQ..&RES..DEFLIB(SETRCPTB)
//SETRCPVS DD DISP=SHR,DSN=&HLQ..&RES..SETRCPVS
//SYSPRINT DD SYSOUT=*

```

2 Add this option to the FSISYS INI file:

```

< VSAM >
    VSAMRCPTB = DD:SETRCPVS

```

The DD name you associate with the VSAM SETRCPTB file is up to you. This INI option tells the system to open and read the SETRCPTB file using VSAM.

3 Modify the JCL for the GenData step so the SETRCPVS DD statement is in that step and it references the VSAM KSDS created for the SETRCPTB in step 1. If you are using the DAP procedure in PROCLIB, add the appropriate DD statement to that procedure. If you are executing each step as a separate job, add the DD statement to the GenDataX job.

CREATING NAFILES AND POLFILES AS VSAM KSDSs

Normally, the NAFILE and POLFILE, which are created and written to during the GenData step, are defined as sequential files with a record format of FBS. You can, however, create them as VSAM KSDSs. The member, NAPOLVS, in JCLLIB provides the JCL for the additional IDCAMS job step you will need. This JCL is also listed below:

```
//NAPOLVS EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSIN DD *

DELETE &HLQ..&RES..GENDATA.NAFILE.KSDS PURGE
DELETE &HLQ..&RES..GENDATA.POLFILE.KSDS PURGE

DEFINE CLUSTER(NAME(&HLQ..&RES..GENDATA.NAFILE.KSDS) +
              CYL(5 1) +
              KEY(4 0) +
              REUSE ) +
              DATA(NAME(&HLQ..&RES..GENDATA.NAFILE.KSDS.DATA) +
              RECORDSIZE(2048 2048) ) +
              INDEX(NAME(&HLQ..&RES..GENDATA.NAFILE.KSDS.INDEX) )

DEFINE CLUSTER(NAME(&HLQ..&RES..GENDATA.POLFILE.KSDS) +
              CYL(5 1) +
              KEY(4 0) +
              REUSE ) +
              DATA(NAME(&HLQ..&RES..GENDATA.POLFILE.KSDS.DATA) +
              RECORDSIZE(2048 2048) ) +
              INDEX(NAME(&HLQ..&RES..GENDATA.POLFILE.KSDS.INDEX) )
```

To use VSAM for the NAFILE and POLFILE follow these steps:

- 1 Insert the NAPOLVS JCL step listed above into the GenData step prior to the GenData execution step, changing any file names or other values to conform to your environment.
- 2 Make sure the NAFILE and POLFILE file names in the GenData and GenPrint steps (GenDataX and GenPrTX if you are executing each step as a separate job) reflect the name of the VSAM files created in the IDCAMS step.
- 3 Add this option to the FSISYS INI file:

```
< VSAM >
VSAMNA = DD:NAFILE
```

The DD name you associate with the VSAM NAFILE file is up to you. This INI option tells the system to open and read both the NAFILE and the POLFILE using VSAM.

THE LOADDAP JOB

The LOADDAP job in JCLLIB is listed below. This job creates the...

- system datasets
- RPEX1 and UTEX1 sample datasets (for the verification test)
- font datasets

In addition, the LOADDAP job reads from the install tape and populates these datasets.

```

/* COPY JOBCARD HERE ...
/* * * * * *
/*      LOADDAP -
/*
/*      COPY THE DAP BATCH SYSTEM FILES, RPEX1 AND UTEX1 RESOURCES
/*      FROM A 3480 CARTRIDGE TO AN MVS SYSTEM.  FILES LOADED ARE :
/*
/*      1.  JCLLIB
/*      2.  PROCLIB
/*      3.  SOURCE
/*      4.  INCLIB
/*      5.  OBJLIB
/*      6.  LINKLIB
/*      7.  DBRMLIB (DB2)
/*      8.  DEFLIB (RPEX1)
/*      9.  DDTLIB (RPEX1)
/*     10.  FAPLIB (RPEX1)
/*     11.  COMPLIB (RPEX1)
/*     12.  EXTRACT (RPEX1)
/*     13.  LOG2IMG (RPEX1 XEROX LOGO IMAGES)
/*     14.  LOG2FNT (RPEX1 XEROX LOGO FONTS)
/*     15.  PFRMLIB (RPEX1 XEROX FRM'S)
/*     16.  DEFLIB (UTEX1)
/*     17.  DDTLIB (UTEX1)
/*     18.  FAPLIB (UTEX1)
/*     19.  COMPLIB (UTEX1)
/*     20.  EXTRACT (UTEX1)
/*     21.  LOG2IMG (UTEX1 XEROX LOGO IMAGES)
/*     22.  LOG2FNT (UTEX1 XEROX LOGO FONTS)
/*     23.  AFP240 (AFP 240-DPI FONTS)
/*     24.  AFP300 (AFP 300-DPI FONTS)
/*     25.  XEROX (XEROX FONTS)
/*     26.  XEROXR (XEROX ROTATED FONTS)
/*
/*
/*      => GO TO BOTTOM OF JOB AND CHANGE VOLSER & CUSTHLQ TO MATCH
YOUR
/*      => SITE REQUIREMENTS.
/*
/* * * * * *
/*
/*      IN-STREAM PROC FOLLOWS ...
/*
//LOAD  PROC TUNIT=,
//      TVOLSER=,
//      CUSTHLQ=,
//      DUNIT=,

```

```

//          PDSTYPE=
// *
//JCLLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..JCLLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(1,SL)
//SYSUT2 DD DSN=&CUSTHLQ..JCLLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(2,1,10)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
// *
//PROCLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..PROCLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(2,SL)
//SYSUT2 DD DSN=&CUSTHLQ..PROCLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(2,1,10)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
// *
//SOURCE EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..SOURCE,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(3,SL)
//SYSUT2 DD DSN=&CUSTHLQ..SOURCE,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(8,10,100)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
// *
//INCLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..INCLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(4,SL)
//SYSUT2 DD DSN=&CUSTHLQ..INCLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(4,1,50)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
// *
//OBJLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..OBJLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(5,SL)
//SYSUT2 DD DSN=&CUSTHLQ..OBJLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(35,5,75)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
// *
// * DEFINE LINKLIB AS PDS (NOT PDSE) BY DEFAULT
// *
//LINKLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..LINKLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(6,SL)
//SYSUT2 DD DSN=&CUSTHLQ..LINKLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(30,5,10)),DSNTYPE=PDS
//SYSIN DD DUMMY
// *
// * DON'T GET SYSCPRT FROM TAPE - JUST ALLOCATE SPACE FOR IT
// * FOR LATER COMPILES.
// *

```



```

//SYSCPRT EXEC PGM=IEFBR14
//SYSPRINT DD SYSOUT=*
//DD1 DD DSN=&CUSTHLQ. .SYSCPRT,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(25,25,100)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//DBRMLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .DBRMLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(7,SL)
//SYSUT2 DD DSN=&CUSTHLQ. .DBRMLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//DEFLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .RPEX1.DEFLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(8,SL)
//SYSUT2 DD DSN=&CUSTHLQ. .RPEX1.DEFLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(3,1,15)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//DDTLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .RPEX1.DDTLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(9,SL)
//SYSUT2 DD DSN=&CUSTHLQ. .RPEX1.DDTLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//FAPLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .RPEX1.FAPLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(10,SL)
//SYSUT2 DD DSN=&CUSTHLQ. .RPEX1.FAPLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//COMPLIB EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .RPEX1.COMPLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(11,SL)
//SYSUT2 DD
DSN=&CUSTHLQ. .RPEX1.COMPLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//* NOTE THAT IEBCOPY IS USED TO COPY THE EXTRACT FILE, WHICH
//* IS A SEQUENTIAL FILE, NOT A PDS.
//*
//EXTRACT EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ. .RPEX1.EXTRACT,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(12,SL)
//SYSUT2 DD
DSN=&CUSTHLQ. .RPEX1.EXTRACT,DISP=(,CATLG),UNIT=&DUNIT,

```

```

//          SPACE=(CYL,(1,1))
//SYSIN     DD  DUMMY
//*
//LOG2IMG EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..RPEX1.LOG2IMG,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(13,SL)
//SYSUT2    DD
DSN=&CUSTHLQ..RPEX1.LOG2IMG,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//LOG2XFNT EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..RPEX1.LOG2XFNT,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(14,SL)
//SYSUT2    DD
DSN=&CUSTHLQ..RPEX1.LOG2XFNT,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//PFRMLIB EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..RPEX1.PFRMLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(15,SL)
//SYSUT2    DD
DSN=&CUSTHLQ..RPEX1.PFRMLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//DEFLIBU EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..UTEX1.DEFLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(16,SL)
//SYSUT2    DD  DSN=&CUSTHLQ..UTEX1.DEFLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(3,1,15)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//DDTLIBU EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..UTEX1.DDTLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(17,SL)
//SYSUT2    DD  DSN=&CUSTHLQ..UTEX1.DDTLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//FAPLIBU EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*
//SYSUT1    DD  DSN=&HLQ..UTEX1.FAPLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(18,SL)
//SYSUT2    DD  DSN=&CUSTHLQ..UTEX1.FAPLIB,DISP=(,CATLG),UNIT=&DUNIT,
//          SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN     DD  DUMMY
//*
//COMPLIBU EXEC PGM=IEBCOPY
//SYSPRINT DD  SYSOUT=*

```

```

//SYSUT1 DD DSN=&HLQ..UTEX1.COMPLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(19,SL)
//SYSUT2 DD
DSN=&CUSTHLQ..UTEX1.COMPLIB,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(2,2,15)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//* NOTE THAT IEBGENER IS USED TO COPY THE EXTRACT FILE, WHICH
//* IS A SEQUENTIAL FILE, NOT A PDS.
//*
//EXTRACTU EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..UTEX1.EXTRACT,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(20,SL)
//SYSUT2 DD
DSN=&CUSTHLQ..UTEX1.EXTRACT,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(1,1))
//SYSIN DD DUMMY
//*
//LOG2IMGU EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..UTEX1.LOG2IMG,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(21,SL)
//SYSUT2 DD
DSN=&CUSTHLQ..UTEX1.LOG2IMG,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//LOG2XFU EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=&HLQ..UTEX1.LOG2XFNT,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(22,SL)
//SYSUT2 DD
DSN=&CUSTHLQ..UTEX1.LOG2XFNT,DISP=(,CATLG),UNIT=&DUNIT,
// SPACE=(CYL,(1,1,5)),DSNTYPE=&PDSTYPE
//SYSIN DD DUMMY
//*
//* FORCE AFP FONTLIB TO BE PDS - PDSE HAS PROBLEMS
//*
//AFP240 EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=FSI.AGFA.AFP240.FONTLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(23,SL)
//SYSUT2 DD DSN=&CUSTHLQ..AGFA.AFP240.FONTLIB,DISP=(,CATLG),
// UNIT=&DUNIT,
// SPACE=(CYL,(35,10,150)),DSNTYPE=PDS
//SYSIN DD DUMMY
//*
//* FORCE AFP FONTLIB TO BE PDS - PDSE HAS PROBLEMS
//*
//AFP300 EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=*
//SYSUT1 DD DSN=FSI.AGFA.AFP300.FONTLIB,DISP=SHR,UNIT=&TUNIT,
// VOL=(,RETAIN,,SER=&TVOLSER),LABEL=(24,SL)
//SYSUT2 DD DSN=&CUSTHLQ..AGFA.AFP300.FONTLIB,DISP=(,CATLG),
// UNIT=&DUNIT,

```

```
//          SPACE=(CYL,(40,10,150)),DSNTYPE=PDS
//SYSIN     DD DUMMY
//*
//XEROX     EXEC PGM=IEBCOPY
//SYSPRINT  DD SYSOUT=*
//SYSUT1    DD DSN=FSI.AGFA.XEROX.FONTLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(25,SL)
//SYSUT2    DD DSN=&CUSTHLQ..AGFA.XEROX.FONTLIB,DISP=(,CATLG),
//          UNIT=&DUNIT,
//          SPACE=(CYL,(25,5,75)),DSNTYPE=&PDSTYPE
//SYSIN     DD DUMMY
//XEROXR     EXEC PGM=IEBCOPY
//SYSPRINT  DD SYSOUT=*
//SYSUT1    DD DSN=FSI.AGFA.XEROX.ROTATED.FONTLIB,DISP=SHR,UNIT=&TUNIT,
//          VOL=(,RETAIN,,,SER=&TVOLSER),LABEL=(26,SL)
//SYSUT2    DD DSN=&CUSTHLQ..AGFA.XEROX.ROTATED.FONTLIB,DISP=(,CATLG),
//          UNIT=&DUNIT,
//          SPACE=(CYL,(115,10,500)),DSNTYPE=&PDSTYPE
//SYSIN     DD DUMMY
//*
//          PEND
// * * * * *
// *
//STEP1 EXEC LOAD,TUNIT=CART,
//          TVOLSER=D10301,          <= CHANGE
//          CUSTHLQ='FSI.v103',      <= CHANGE
//          DUNIT=SYSDA,
//          PDSTYPE=LIBRARY
// *
```

OS/390 LIBRARIES

The system begins as many source code modules which are separated into directories or libraries. Each library performs a specific task. For instance, INILIB handles Initialization file tasks and GVMLIB performs global variable manager functions.

Some of these libraries perform functions that are relevant only on the PC platform. You do not need to upload these libraries to your MVS system. The libraries you must upload to your MVS system are listed in the table below, along with the various print drivers.

An asterisk (*) indicates the library is needed only to perform a particular function. For instance FAP2MET is required only if you are converting FAPs to PMETs and running with the CompileInstream INI option set to *No*.

Library	Required for the system?	Required for Xerox?	Required for AFP?	Required for Postscript?	Required for PCL?
AFP2MVS			Y		
AFPCOPY			Y		
AFPFMDEF			Y		
AFPLIB			Y		
AFPPRT			Y		
ARCLIB	Y*				
ASCLIB	Y				
BARR2MVS					
BARRWRAP		Y*			
CARLIB	Y				
CFA2FAP	Y				
CPCNV	Y				
CUSLIB	Y				
CUSLIB	Y				
DALLIB	Y				
DB2LIB	Y*				
DBLIB	Y				
DSLIB	Y				
ERRLIB	Y				
FAP2CFA					
FAP2MET		Y*			

Library	Required for the system?	Required for Xerox?	Required for AFP?	Required for Postscript?	Required for PCL?
FAP2OVL			Y*		
FAPLIB	Y				
FDT2CFA	Y				
FIXOFFS					
FNTLIB	Y				
FSILIB	Y				
FSIVER	Y				
GenArc	Y*				
GenData	Y				
GENLIB	Y				
GenPrint	Y				
GenTrn	Y				
GLBLIB	Y				
GRFLIB	Y				
GVMLIB	Y				
INILIB	Y				
LBYLIB	Y				
LOG2PSEG			Y*		
LOGLIB	Y				
METOPT		Y			
PCLLIB					Y
PDS2VSAM	Y*				
PRTLIB	Y				
PSTLIB				Y	
RCBLIB	Y				
RCP2VSAM	Y*				
RPLIB	Y				

Library	Required for the system?	Required for Xerox?	Required for AFP?	Required for Postscript?	Required for PCL?
RULLIB	Y				
SAMPAFP			Y		
TIFLIB	Y				
TRANSLAT	Y				
UTILLIB	Y				
UTLLIB	Y				
VMMLIB	Y				
XDBLIB	Y				
XERDNLD		Y*			
XERLIB		Y			
XMCLIB		Y			

UPLOADING AND DOWNLOADING RESOURCES

The standard directory structure for resources on the PC is:

```
C:\RPEX1\  
  DEFLIB\  
  DDTLIB\  
  COMPLIB\  
  FORMS\  
  EXTRACT\
```

These resources exist on the PC as text files and are sometimes referred to as *ASCII files* (COMPLIB is an exception and will be explained shortly). The resources are generally uploaded into files on an MVS as follows:

PC Directory	MVS File Name	MVS File Type
DEFLIB*.*	&HLQ..&RES..DEFLIB(*)	PDS
DDTLIB*.*	&HLQ..&RES..DDTLIB(*)	PDS
FORMS*.*	&HLQ..&RES..FAPLIB(*)	PDS
EXTRACT*.*	&HLQ..&RES..EXTRACT	Sequential file

Text files on a PC are represented using the ASCII character set. Text files on an MVS are represented using the EBCDIC character set. As these text files are uploaded from the PC to an MVS, each text character must be translated from ASCII to EBCDIC. The program that provides the communications between your PC and MVS (3270 Emulator) generally includes a file transfer feature. Included in the file transfer feature is an option to translate files from ASCII to EBCDIC as the files are uploaded.

COMPLIB stands for *Compiled Resources Library*. FAP files can be parsed, or *compiled*, before you run the system, and placed into the COMPLIB. The utilities you can use to compile FAP files are: FAP2CFA and FDT2CFA.

This compilation improves performance since the text-oriented FAP files do not have to be parsed again during the print assembly process.

NOTE: You *must*, however, run the utility using the same version and on the same platform on which you will run the system—you *cannot* compile the FAP files on the PC and upload the resulting CFA files onto an MVS system. You *must* run the FAP2CFA or FDT2CFA utilities on your MVS system.

TRANSFERRING FILES

Your 3270 emulation program may include features which let you transfer files from the PC to the MVS (upload) and from the MVS to the PC (download). Part of this capability will probably be an option to transfer a *binary* file or a *text* file. Generally, when a 3270 emulator uploads a binary file, it does not translate characters as the file is uploaded—it uploads the file as is. What’s more, any carriage return and line feed (CRLF) characters are also uploaded as is.

Conversely, when a 3270 emulation program uploads a file designated as text, it translates each character as it uploads it and removes any CRLF characters from the file. Characters *between* the CRLFs are assumed to be the records and are placed into the file on MVS. You will almost always upload your resources to the MVS as *text* files (see the following topic, [Handling International Characters on page 74](#), for an exception).

Your 3270 emulation program may also let you upload a file from the PC to MVS using the DOS Command Line interface. The upload program is usually called SEND and the download program is called RECEIVE.

For example, to upload the PC file “myfap fap” in the c:\rpex1\forms directory to the MVS PDS “DOC.FAPLIB” you could enter the following command in a DOS window:

SEND c:\rpex1\forms\myfap.fap 'doc.faplib(myfap)' ASCII CRLF

This SEND command include the exact file name and full path name of the PC file followed by a space and then the name of the host file ('doc.faplib(myfap)'). In this case the host file is a PDS (Partioned Data Set) so you must indicate what member to place the file into.

The *ASCII* parameter tells the system to translate the PC file from ASCII to EBCDIC as it’s uploaded. The *CRLF* parameter tells the system to remove the carriage return and line feed characters as it’s uploaded.

Using the ASCII and CRLF parameters tells the SEND command to treat the file as a *text* file. If you omitted the ASCII and CRLF parameters, the SEND command would treat the file as a *binary* file. There are some situations where you might want to use just the ASCII parameter or just the CRLF parameter, but these situations are rare (see [Handling International Characters on page 74](#), for an example) and you will generally use either both of them or neither of them.

HANDLING INTERNATIONAL CHARACTERS

DocuCorp uses the Windows ANSI code page (1004) for files residing on the PC and the EBCDIC code page 37 for files residing on an MVS system. There are, however, characters in code page 1004 which are not in code page 37—mainly desktop publishing characters from code point 128 to 159.

To support these characters, the system uses undefined code points in code page 37 (code points below 64). For maximum portability, avoid using characters which are not defined in code page 37.

If you have resource files, such as extract or FAP files, on the PC which contain international characters you will need to translate those characters into the correct code point when you upload them from the PC to an MVS system.

Depending on your 3270 emulation program, you might be able to tell it to translate the file during the upload. If your 3270 emulation program does not let you specify the code page to translate from and to during the upload, or if your resource files on the PC use some of the undefined code points in code page 37, use the CPCNV utility.

The CPCNV utility converts text files from one code page to another. You can run the CPCNV utility either on the PC or on an MVS system. Below are examples of how you would convert a FAP file named “french1.fap”, on a PC or on an MVS system:

Running CPCNV on a PC

Follow these steps to run the CPCNV utility on a personal computer:

- 1 Run the CPCNV program on the FAP files as follows:

```
cpcnv /i=french1 /s=1004 /d=37
```

- 2 Upload the FAP files as follows:

```
SEND french1.fap 'doc.faplib(french1)' CRLF
```

Note that this is one of the cases in which you use the CRLF parameter but do not use the ASCII parameter. You do not use the ASCII parameter because you have already translated the text characters in french1.fap from ANSI code page 1004 (ASCII) to EBCDIC code page 37. You still use CRLF however, because you want the upload process to remove the carriage return and line feed characters from the file as it is uploaded.

Running CPCNV on an MVS

Follow these steps to run the CPCNV utility on an MVS:

- 1 Upload the FAP as follows:

```
SEND french1.fap 'doc.faplib.unconv(french1)' CRLF
```

Again, note that you do not use ASCII, but you do use CRLF. In this case, you do not want the 3270 Emulator program to translate from ASCII to EBCDIC because you are going to let the CPCNV utility on an MVS system perform the translation. Also, note that the file name on the MVS system of ‘doc.faplib.unconv’ denotes that the resources in this PDS *are not* converted.

- 2 Run the CPCNV utility on the FAP file using, as an example, the JCL provided in member CPCNVX of JCLLIB. Just as on the PC, the source code page will be 1004 and the destination code page will be 37.

XEROX IMAGE, FONT, AND FORM FILES

You can use the XERDNLD utility to send a resource to the Xerox printer and save it on the printer's disk drive. Some of the Xerox resources you might want to save to the printer are Xerox images (IMG), fonts (FNT) and forms (FRM). Each of these resources must first be created on the PC and then uploaded to the MVS system *without* ASCII or CRLF.

To get a Xerox resource from the PC up to the MVS system and then to a Xerox printer, follow these steps:

- 1 Define a PDS on the MVS system to upload into. Define the PDS with the DCB characteristics as shown in the XERLOGOS job in JCLLIB, such as RECFM=VBM, LRECL=512, BLKSIZE=23000.
- 2 Upload the Xerox resource from the PC to the MVS system *without* ASCII or CRLF.
- 3 Run the XERDNLD utility against this resource. There is a sample job in JCLLIB called XERDNLDX which runs XERDNLD. Note the output PDS is again defined with the characteristics RECFM=VBM, LRECL=512, and BLKSIZE=23000.
- 4 Run the GENERXER job in JCLLIB. Change the SYSUT1 DD statement so it points to the output from the XERDNLD utility, as discussed in step 3.

Change the SYSUT2 DD statement's SYSOUT class to the correct class for the Xerox printer. The GENERXER job will copy the resource into this SYSOUT class and the resource will be saved onto the Xerox printer's disk drive. Before you send the resource to the printer, start the Xerox printer in the same manner you currently start it (or intend to start) to print Documaker Server output.

XEROX PRE-COMPILED METACODE (PMET) FILES

Currently, you cannot upload Xerox pre-compiled Metacode (PMET) files generated on the PC onto an MVS system. You must run the FAP2MET utility on an MVS system and convert the FAPs to PMETs on your MVS system.

OS/390 PROGRAMS AND UTILITIES

The following is a list and a short description of the programs and utilities you can run on an OS/390 (MVS) system. For more information about these utilities, see the [Docutoolbox Reference](#).

AFPCOPY utility	This utility takes an AFP print stream which may contain multiple BEGINDOC and ENDDOC statements and generates an AFP print stream with only one BEGINDOC and one ENDDOC statement—in other words, it converts the print stream from <i>cut-sheet</i> to <i>continuous-form</i> . No parameters are required. The input AFP print stream is read from the INFILE DD statement and the output AFP print stream is written to the OUTFILE DD statement. Look in member AFPCOPYX of JCLLIB to find an example of this utility.
AFPFMDEF utility	This utility accepts as input a source form definition file and generates an AFP FormDef. Look in member AFPFMDFX of JCLLIB to find an example of this utility.
AFP2MVS utility	This utility accepts as input an AFP resource, such as a font, page segment, or print-ready file, that's been uploaded to the MVS system from the PC with no ASCII and no CRLF. It also generates that resource to another file such that the record-oriented format of the resource will be restored. Look in the AFP2MVSX member of JCLLIB to find an example of this utility.
BARR2MVS utility	This utility program accepts as input a print-ready Metacode file produced by Documaker Server running on the PC (using these INI options: Environment=OS22, OutMode=BARR, or BARRWORD), strips that file of the BARR-encoded information and produces a Metacode print-ready file acceptable in an MVS environment. Look in the BARR2MVX member of JCLLIB to find an example of this utility.
BARRWRAP utility	This utility accepts as input a print-ready Metacode file produced by Documaker Server on MVS and produces a Metacode print-ready file <i>wrapped</i> with control information the BARR printer-attachment system understands. Look in the BARRWRPX member of JCLLIB to find an example of this utility.
CPCNV utility	This utility converts a source file from one code page to another. The utility reads an input source file, such as an extract file, a FAP file, and so on, which corresponds to a specific code page. You can convert either a single member in the PDS (use /I=member) or all members of the PDS (use /I=*). The utility then generates a target file which corresponds to a different code page. Look in member CPCNVX of JCLLIB to find an example of this utility.
FAP2CFA utility	This utility accepts as input a FAP file and generates a compiled FAP file. Look in member FAP2CFAX of JCLLIB to find an example of this utility.
FAP2MET utility	This utility accepts as input a FAP file and generates a pre-compiled Metacode member, usually placing the <i>PMET</i> into the PMETLIB dataset. You can convert a single FAP in the PDS (use /I=fapname) or all FAPs in the PDS (use /I=*). There are several options you can select when you run the FAP2MET utility. For example, you can save the PMET in the PMETLIB dataset so it is ready to be included by the GenPrint program into a print stream or you can generate the PMET so it can be sent directly to the Metacode printer. You can also select the HMI, Short Edge Bind, or Long Edge Bind options. Look in member FAP2METX of JCLLIB to find an example of this utility.

FAP2OVL utility	This utility generates an AFP overlay from a FAP file, usually placing it into an overlay library PDS, which is generally referred to as <i>OVERLIB</i> . You can convert a single FAP in the PDS (use /I=fapname) or all FAPs in the PDS (use /I=*). Look in the FAP2OVLX member of JCLLIB to find an example of this utility.
FDT2CFA utility	<p>This utility accepts as input a FSISYS INI file (member of DEFLIB), a FORM file (member of DEFLIB) and the FAPLIB PDS (Partitioned Data Set) and produces a COMPLIB PDS containing compiled FAP files.</p> <p>This utility is similar to the FAP2CFA utility, except the FAP2CFA utility reads a single FAP and compiles it into a compiled FAP, while the FDT2CFA utility reads the FSISYS INI file, gets the name of the FORM member, opens the FORM member of DEFLIB to get a list of all of the FAP files that might be used, compiles all of these FAP files into compiled FAPs, and places them into the COMPLIB. Look in member FDT2CFAX of JCLLIB to find an example of this utility.</p>
FIXOFFS utility	<p>Use the FIXOFFS utility to correct field offsets after you have uploaded or downloaded a file from an environment where physical offset values differ. For example, you must use this utility if you are running the GenArc program in an MVS environment using a local area network (LAN) archive of MVS-generated data.</p> <p>The utility uses the offsets in the NA and POL files to determine how to update other output files, such as recipient batch files and the NEWTRN file.</p>
FSIVER utility	This utility accepts as input a LINKLIB PDS and generates a report that lists which patches have been applied to the programs in that LINKLIB. You can generate the report for either a single program (use /I=program name) or for all programs in the PDS (use /I=*). Look in member FSIVERX of JCLLIB to find an example of this utility.
SEQ2KSDS utility	Use the SEQ2KSDS utility to convert a non-VSAM NAFIILE or POLFILE dataset into a VSAM copy of that dataset. A 4-byte key is prefixed to each record of the VSAM dataset as it is created. You can find sample JCL for running the SEQ2KSDS utility in the SEQ2KSDX member of JCLLIB.
GenArc program	The GenArc program is an optional part of the system which you run after the GenData program. The GenArc program reads the NEWTRN, the NAFIILE, and POLFILE and writes (or archives) this information to a repository (DB2). You can retrieve and print these archived form sets. The GenArcDX member of JCLLIB runs GenArc.
GenData program	The GenData program uses a processing engine referred to as the <i>Rules Processor</i> to step through the transaction trigger file (TRNFILE) created by the GenTrn program. This creates an NAFIILE which contains image and variable data information, a POLFILE which contains recipient information, and recipient batch files (BATCH1, BATCH2, and so on) which contain trigger records for the different recipient groups. These files are sent to the GenPrint (or GenArc) program. The GenData program is part of the DAP procedure in PROCLIB. There is also an example of GenData in the GenDataX member of JCLLIB.
GenPrint program	The GenPrint program reads the recipient batch files, NAFIILEs, and POLFILEs produced by the GenData program and produces print-ready streams for specific printer platforms such as Xerox Metacode or IBM AFP. The print streams can be sent to datasets which you can copy to the JES print SPOOL or directly to JES SPOOL as SYSOUT files. The GenPrint program is part of the DAP procedure in PROCLIB. There is also an example of GenPrint in the GenPrtX member of JCLLIB.

GenTrn program	The GenTrn program performs the first step of the processing cycle. The GenTrn program accepts as input an extract file and produces a transaction trigger file or <i>TRNFILE</i> . Each record in the TRNFILE represents a single transaction. The TRNFILE is then passed to the GenData program. The GenTrn program is part of the DAP procedure in PROCLIB. There is also an example of GenTrn in the GenTrnX member of JCLLIB.
LOG2PSEG utility	This utility accepts as input a logo file, which is similar to a bitmap file, and produces an AFP page segment. The page segment is generally placed into a page segment library PDS referred to as PSEGLIB. This PSEGLIB must be available to your AFP printer when you print. You can convert a single logo in the PDS (use /I=logoname) or all logos in the PDS (use /I=*). Look in member LOG2PSGX of JCLLIB to find an example of this utility.
PDFKEY utility	Use the PDFKEY utility to generate the encrypted passwords used in the PDF security control group.
PDS2VSAM utility	This utility accepts as input a partitioned dataset, such as the DDTLIB or PMETLIB PDSs, and copies those members into a VSAM KSDS. Look in members PDS2VSDX, PDS2VSJX, and PDS2VSPX of JCLLIB for examples of this utility.
RCP2VSAM utility	This utility accepts as input a set recipient table, usually the SETRCPTB member in the DEFLIB PDS, and copies this table into a VSAM KSDS. When you have large set recipient tables, this conversion can speed the reading of the table. Look in member RCP2VSMX of JCLLIB to find an example of this utility.
SAMPAFP utility	This utility accepts as input the name of either an AFP overlay or page segment and generates a SYSOUT file that, together with the correct USERLIB reference to this AFP resource, will print this overlay or page segment resource. Look in member SAMPAFPX of JCLLIB to find an example of this utility.
TRANSLAT utility	This utility accepts as input a tokenized message file (MSGFILE) that is output from the GenTrn, GenData, GenPrint, or GenArc program. This utility then produces a readable error file. The TRANSLAT utility lets you translate the tokens in the MSGFILE into various languages or simply change the contents to meet your needs. Look in member TRANSLTX of JCLLIB to find an example of this utility.
XERDNLD utility	<p>This utility lets you get resources to a Xerox printer if you do not have other software programs to accomplish this task.</p> <p>The utility accepts as input a Xerox Metacode resource, such as a font, image, or FRM file, encapsulates it with location-specific DJDE information and generally writes the resource back out to a PDS. You can then send the contents of this PDS to the JES SPOOL and target those contents to a specific Xerox printer where the resource will be stored on the printer's local disk device. The resources will then be available when needed at print time. Look in the XERDNLDX member of JCLLIB to find an example of this utility.</p>

CHAPTER 3

Installing Documaker Server on UNIX/Linux

This guide provides detailed information on how to install and configure the system on an IBM AIX, Sun Solaris, HP-UX, and Linux environments.

You will find information on these topics:

- [Overview on page 80](#)
- [What's on the Installation CDs on page 81](#)
- [Installing the System on page 82](#)
- [Checking Your Installation on page 84](#)
- [Using the Documentation on page 87](#)
- [Start-Up Tips on page 88](#)
- [Optimizing Performance on page 89](#)
- [Uploading and Downloading Resources on page 92](#)
- [Directory Structures on page 93](#)

OVERVIEW

This chapter provides you with steps to install and test the system on your UNIX/Linux system. This overview discusses the contents of this chapter.

NOTE: See [System Requirements on page 2](#) for information about system requirements.

What's on the Installation CD

The system is available on CD-ROM for IBM AIX, Sun Solaris, HP-UX, and Intel-based Linux systems. This topic describes the contents of the Installation CD you received. For more information, see [What's on the Installation CDs on page 81](#).

Installing the System

This topic explains how to install the system. For more information see [Installing the System on page 82](#).

Checking Your Installation

After you install your system, use the sample resources to check your installation. For detailed instructions, see [Checking Your Installation on page 84](#).

Using the Documentation

This topic describes the on-line documentation included on the Installation CD and explains how to use it. For more information, see [Using the Documentation on page 87](#).

Start-Up Tips

This topic provides additional information on using the system in a UNIX/Linux environment. For more information, see [Start-Up Tips on page 88](#).

Optimizing Performance

Once you have installed and tested your system, review this topic to improve system performance. For more information, see [Optimizing Performance on page 89](#).

Uploading and Downloading Resources

Sharing resources between the different platforms is the subject of this topic. Once you have installed and tested your system and you are ready to take developed master resource libraries from Windows to UNIX/Linux, you can review this topic to get details transfer methods and formatting. For more information, see [Uploading and Downloading Resources on page 92](#).

Directory Structures

This topic describes the layout of the files in a typical installation. For more information, see [Directory Structures on page 93](#).

WHAT'S ON THE INSTALLATION CDs

The Installation set includes these CD-ROMs:

CD	Description
CD-1	Installation routines, program files, documentation, and sample MRLs
CD-2	Fonts

NOTE: Registered users can go to the [DOSS](#) site where you can logon, review current patch reports, and download installation files which you can transfer to UNIX systems for installation.

Installation routines

Depending on your license, you will find one of the following installation programs on CD-1 along with the MRL installation program:

Table 1:

	AIX	Solaris	HP-UX	Linux
Run time environment	setuprte.aix	setuprte.spa	setuprte.hpx	setuprte.lnx
Master resource libraries (MRLs)	setuprp1.aix setupdms1.aix	setuprp1.spa setupdms1.spa	setuprp1.hpx setupdms1.hpx	setuprp1.lnx setupdms1.lnx
SDK	setupsdk.aix	setupsdk.spa	setupsdk.hpx	setupsdk.lnx

See [Installing the System on page 82](#) for instructions on how to install the system.

On-line documentation

On CD-1 you will find directories which contain on-line manuals and other documentation. Use Adobe's Acrobat Reader to view and print the on-line manuals. Here is a list of the directories:

Directory	Contains
\doc\api	Technical documentation about system libraries and application program interfaces (APIs). You can view this information using your browser.
\doc\dm-rp	The user documentation in PDF format.
\doc\release	The Features and Enhancements Guide for this release.

See [Using the Documentation on page 87](#) for information on how to use the documentation.

INSTALLING THE SYSTEM

Follow these steps to install the following on a computer running AIX, Solaris, HP-UX, or Linux (Intel-based):

- Documaker
- AGFA, PCL, and PostScript fonts
- AFP fonts
- Xerox fonts

A separate and optional installation program is provided that contains a sample resource library which includes test results and sample data. The RPEX1 resources are designed for the insurance market.

NOTE: Re-installation of the Run Time Environment *does not* overwrite your INI files.

Before You Begin

Make sure you have full directory access permissions (read/write/execute) to the directory into which you will be installing Documaker Server.

Setting up libraries

If you install the system into an existing directory, the current library setup (INI files) is retained. If you install the system into a new directory, you must set up all of your libraries—just as you would for a new customer.

Setting up users

Follow these steps to install the system:

- 1 Log on to the UNIX/Linux system using the account you want to use for the installation. By default the installation process installs the system into a subdirectory in your home directory with a name based on the release number.


For example, if you are installing the system using an account named *fap* that has a home directory of */home/fap*, the installation installs the system in the */home/fap/rel110* directory. You can, however, override the default.
- 2 Insert CD-1 in your CD-ROM drive on the UNIX/Linux server. Some systems may be set up to require system administrator's access to access the CD-ROM drive and mount the CD. Check with your system administrator if necessary.

NOTE: Optionally, you can insert the CD into the CD-ROM drive of a Windows workstation and transfer the installation files from the CD to the UNIX or Linux server using FTP in binary mode or with a network drive mapping using NFS (Network File System) or SaMBa (SMB/CIFS file sharing protocol).

You may need a knowledge of file permissions so you can make the installation executable if the transfer method changes the permissions.

- 3 Open the readme.txt file on the CD using a text editor and review it. This file contains any additional information that could not be added to this document before publication.

- 4 Run the installation program from the CD or copy the installation files to a different location and run the installation program from there using either a Korn or a Bash shell prompt.
- 5 The initial installation screen describes the type of installation, displays the default directory the installation will use, and lets you override the installation location. Here is an example of the RTE installation screen with an override directory of */home/docc/rel110* being entered:

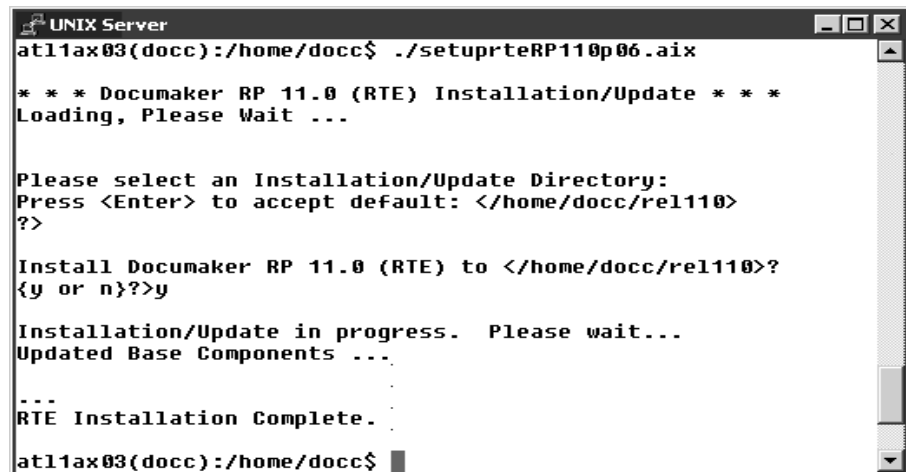

```
UNIX Server
atl1ax03(docc):/home/docc$ ./setuprteRP110p06.aix

* * * Documaker RP 11.0 (RTE) Installation/Update * * *
Loading, Please Wait ...

Please select an Installation/Update Directory:
Press <Enter> to accept default: </home/docc/rel110>
?>

Install Documaker RP 11.0 (RTE) to </home/docc/rel110>?
{y or n}?>y

Installation/Update in progress. Please wait...
Updated Base Components ...
...
RTE Installation Complete.
atl1ax03(docc):/home/docc$
```

CHECKING YOUR INSTALLATION

The system includes a sample resource library. The RPEX1 resources are designed for the insurance market. You can check your installation by processing the resources in the sample resource library you received. The sample library includes an example directory which you can use to test against the results you get when you run the following tests.

These examples use scripts such as *run.sh* that pre-set the PATH and library PATH environment variables so the Dynamically Shared Objects (DSOs) and executables can be located at run time.

To manually run the programs or utilities (such as *gentrn*, *gendata*, *genprint*, *ovlcomp*, *fap2cfa*, and so on) at a shell command prompt, set these environment variables by prepending the PATH and the appropriate library PATH environment variables with the location of these files (such as LD_LIBRARY_PATH for Solaris and Linux, SHLIB_PATH for HP-UX, and LIBPATH for AIX).

Some implementations may set these environment variables using a .profile for the shell so they are pre-set automatically when a Korn shell is run. Please check with your system administrator for options.

This is an example of the command-line shell prompt commands to enter if you installed the system into the /home/fap/rel110 directory:

Solaris and Linux

```
PATH=/home/fap/rel110/bin:$PATH
LD_LIBRARY_PATH=/home/fap/rel110/bin:$LD_LIBRARY_PATH
export PATH LD_LIBRARY_PATH
```

AIX

```
PATH=/home/fap/rel110/bin:$PATH
LIBPATH=/home/fap/rel110/bin:$LIBPATH
export PATH LIBPATH
```

HP-UX

```
PATH=/home/fap/rel110/bin:$PATH
SHLIB_PATH=/home/fap/rel110/bin:${SHLIB_PATH:-""}:
export PATH SHLIB_PATH
```

NOTE: Carefully follow these steps, otherwise, the results may be unpredictable.

TESTING WITH THE RPEX1 SAMPLE RESOURCES

The system includes a shell script file (*run.sh*) which lets you process the RPEX1 sample resources. There are specific options and arguments you can use to select the Documaker Server modules (*gentrn*, *gendata*, *genprint*, and *genarc*) in single- or multi-step mode and select the type of printer output, such as PCL, PostScript, Xerox, Metacode and AFP.

The shell script file executes the Documaker Server modules (*gentrn*, *gendata*, *genprint*, and *genarc*) in the appropriate mode for the specified printer type and copies the appropriate INI files and printer overlays into their proper directories (see the [Documaker Server System Reference](#) for more information).

Processing the RPEX1 Sample Resources

To run the system through a processing cycle, follow these steps:

- 1 Go to the mstres/rpex1 directory where you installed the MRL examples.
- 2 At the Korn or Bash shell prompt, enter the appropriate command:

Table 2:

To produce output for	For multi-step, enter	For single-step, enter
all printer types	run.sh a m	run.sh a s
AFP printers	run.sh f m	run.sh f s
Xerox Metacode printers	run.sh x m	run.sh x s
PostScript printers	run.sh s m	run.sh s s
PCL printers	run.sh p m	run.sh p s

NOTE: You can print the usage for the run.sh script to get all the options. Also, you can run the run.sh script without arguments to get a menu system.

Printing the RPEX1 Output

After running the system, the printer ready files can be found in the ../rpex1/data directory.

NOTE: See the [Documaker Server System Reference](#) for detailed instructions on printing to AFP, Metacode, PCL, or Postscript printers.

Testing WIP with RPEX1

The RPEX1 library is set up to place two transactions into WIP. Follow these steps to perform the test:

NOTE: If you are licensed for WIP the following steps apply. If, however, you *are not* licensed for WIP, do not perform these steps.

To process the WIP transactions on UNIX/Linux and view and edit the WIP transactions with the Entry module you must have a drive letter on a Windows workstation mapped to the UNIX/Linux directory where the system was installed using NFS or SaMBa. The Windows workstation installation of the Entry system can then directly access the WIP transactions.

- 1 At a UNIX/Linux Korn or Bash shell prompt, enter this command:

genwip

- 2 If using a NFS or SaMBa mapped drive on Windows, start the Entry module on Windows by entering:
afemnw32 /mode=wip
- 3 Choose the WIP, WIP List option.
- 4 Select transaction 2234567 and click Ok.

Viewing Archived RPEX1 Forms

Optionally, you can archive the bills previously printed by following these steps:

NOTE: If you are licensed for Archive Retrieval the following steps apply. If, however, you *are not* licensed for Archive Retrieval, do not perform these steps.

- 1 At a UNIX/Linux Korn or Bash shell prompt, enter this command:
genarc
- 2 If using a NFS or SaMBa mapped drive on Windows, start the Entry module on Windows by entering this command:
afemnw32 /mode=retrieve
- 3 Choose the Retrieve, Formset option to view the archived bills.

USING THE DOCUMENTATION

The \doc directory contains the on-line documentation available for this release. In this directory on the CD, you will find Portable Document Format (PDF) files which you can view or print using the Adobe• Acrobat• Reader• .

In the \doc\dm-rp directory you will find the various manuals, such as:

- Docucreate Supervisor Guide
- Docucreate User Guide
- Documaker Supervisor Guide
- Documaker User Guide
- Documaker Server System Reference
- Docutoolbox Reference
- Rules Reference
- DAL Reference
- product release information
- Documaker Server Installation Guide

For best results, make sure you have the latest version of Acrobat Reader. You can download the free reader at Adobe's web site: www.adobe.com.

NOTE: If you have Acrobat Reader installed on your computer, uninstall the current version before you install an updated version.

You can use the Acrobat Reader to view the documentation on the Installation CD or you can copy the various files onto your hard disk and view them from there.

START-UP TIPS

Here are some additional tips to help you get your system up and running:

Using long file names

File names in UNIX and Linux can be up to 256 characters long or longer. You should, however, limit the names of resource files, such as FAP and LOG files, to 100 characters or less, excluding the path.

Documaker Server software imposes no limits on the length of the names use for the output files, such as print streams, so you can name those files however you like.

Naming conventions for printers in Windows NT

Windows NT does not use the *LPT* naming convention, such as LPT1, LPT2, and so on, for printers. Instead, it uses the `\\server name\printer` convention. If you are using Windows NT, you may need to modify your FAPCOMP.INI file to print correctly. For Documaker, you may need to modify the FSISYS.INI and FSIUSER.INI files. In Windows NT version 4.0, you must log on as the administrator and establish your printer connections to set up the naming conventions for your printers.

OPTIMIZING PERFORMANCE

This topic will help you configure your system for optimum performance. To gather the following recommendations, we first created benchmarks on a test system. Then, by changing different parameters of that system, we measured performance gains or losses. in our benchmark testing. Here are some of the terms we used during this exercise:

CPU Time The amount of time that a program, such as GenTrn, GenData, or GenPrint, uses the CPU.

EXCPs Execute Channel Programs. We have used these counts as basic measurements of I/O activity.

Wall Clock Time The elapsed time, as measured from the time a program begins to the time that the program ends. This wall clock time can vary significantly from one run to another.

Batch Window Most installations have specific times of the day or night when large batch processes, like this system, are scheduled to run, such as through *cron*. The time frame in which these processes run is sometimes referred to as the *batch window*.

A batch window is measured in wall clock time, such as from 10:00 pm to 5:00 am. Your system installation should run fast enough to complete its processing within the batch window.

Most, but not all, of the following recommendations are the result of many tests and subsequent improvements designed for a hypothetical user. The characteristics of Documaker Server implemented for this hypothetical user are as follows:

- Extract file with large record length (approximately 25,000 bytes/record).
- Form sets composed with large number of individual images.
- Large number of different recipients (approximately 300).
- Moderate number of transactions (approximately 4,000)

NOTE: You can find additional information on optimizing performance in the [Documaker Server System Reference](#).

SETTING YOUR FSISYS INI OPTIONS

The following options attempt to minimize the repeated opening and closing of frequently used files by retaining, or caching, file handles and file data. In many cases the defaults are sufficient but for specific cases, where many different images are used, these caching values may be increased to improve performance.

Caching FAP files In some cases, FAP files (images) are loaded as the GenData program runs. The cache feature keeps frequently used FAP files available for re-use. The CacheFAPFiles option is specified in:

```
< Control >
CacheFAPFiles = 100
```

The default is 100.

Accept the default value *unless* you are loading FAPs in GenData using the CompileInstream option, you are using more than 100 FAP files or logos, or both.

DDT files

Data definition table (DDT) files are loaded during as the GenData program runs. The cache feature keeps frequently used DDT file available for re-use. The RuleFilePool option is specified in:

```
< Control >
RuleFilePool = 100
```

The default is 100.

Accept the default value unless you are using more than 100 DDTs.

Caching Xerox PMET files

MET files contain pre-compiled Xerox Metacode information produced by the FAP2MET utility. The GenPrint program loads MET files as necessary. The cache option keeps frequently used MET files available for re-use. The CacheFiles option is specified in:

```
< PrtType:XER >
CacheFiles = 100
CompileInstream = No
```

The default is 100.

Accept the default value *unless* you are using pre-compiled FAP files, more than 100 FAP files or logos, or both.

Using AFP Overlays

For best performance, you should run the FAP2OVL utility program to compile FAPs into AFP overlays. Tell the system to use the overlays by specifying:

```
< PrtType:AFP >
SendOverlays = Yes
```

Use the PSF librarian to add printer resources to the printer.

LOGGING OPTIONS

LogTransactions option

The GenTrn, GenData, and GenPrint programs optionally place transaction information into a LOG file. In most situations, this information is not needed. The LogTransactions option is specified in:

```
< Control >
LogTransactions = No
```

The default is Yes. For optimum performance, specify No.

LogToConsole option

The GenTrn, GenData, and GenPrint programs optionally store transaction information. In most situations, this information is not needed. The LogToConsole option is specified in:

```
< Control >
LogToConsole = No
```

The default is Yes. For optimum performance, specify No.

DEBUG OPTIONS

In the If_Rule control group, the Debug_If option helps you solve problems when using the IF rule:

```
< If_Rule >
  Debug_if = No
```

The default is Yes. For optimum performance, specify No.

RUN OPTIONS

In the RunMode control group, you have these run time options:

```
< RunMode >
  Download_FAP = No
  LoadCordFAP = No
  CompiledFAP  = No
```

The defaults are shown above.

For optimal performance, set the DownloadFAP option to No, the LoadCordFAP option to No, and the CompileFAP option to Yes.

You can learn more about these options in the Documaker Server System Reference.

OTHER OPTIONS

MaxRecsPerTransaction option

```
< ExtractFile >
  MaxRecsPerTransaction = nn
```

The default is zero (0) and there is no maximum. Be careful using this option. You might want to use this option if you are sure each record in the extract file corresponds to a transaction.

AliasPrintBatches option

```
< ExtractFile >
  AliasPrintBatches = Yes
```

The default is No. Use the default.

UPLOADING AND DOWNLOADING RESOURCES

TRANSFERRING RESOURCE FILES BETWEEN UNIX/LINUX AND WINDOWS

You can use FTP to transfer files from Windows to UNIX and from UNIX to Windows. The important thing to remember is to use the correct mode (binary or ASCII) for the files.

Other options to transfer files between these platforms are available such as using mapped network drive resources such as NFS and SaMBa. This method lets you map a directory on UNIX directly to a Windows workstation. When using this method, the transfer mode is always binary by default.

Uploading a Library from PC to UNIX

Text files such as INI, DFD, DDT, and FAP should be uploaded in ASCII mode if using FTP. Compiled files should be loaded in binary mode. For example, FRM files for Xerox must be uploaded in binary mode after they are compiled using the FAP2FRM utility on a PC.

Overlays for PCL and PostScript can be compiled by the OVLCOMP utility on a PC and then uploaded to UNIX in binary mode or they can be produced directly on UNIX/Linux with the OVLCOMP executable.

NOTE: MET and CFA files are platform dependent, therefore they must be compiled on UNIX. Be sure to also use the same version of the system to compile and use these files.

Downloading Print Streams from UNIX to PC

All types of print streams (PCL, PST, AFP, and Xerox) from the GenPrint program should be downloaded to PC in binary mode if you are going to print from a Windows workstation.

PCL print stream files, once transferred to a Windows workstation, can be printed to a local or network printer using this command:

```
copy /b pclbat1 lbt1
```

PST print stream files, after successful transfer to a Windows workstation, can be printed to a local or network printer using the following command if the DownloadFonts option in the PrtType:PST control group is set to No:

```
copy /b rel103sm.pst+ pstbat1 lpt1
```

You can send an AFP print stream to an AFP printer through PSF/2 from an OS/2 workstation.


Xerox print stream can be sent to Xerox printer through a connected workstation running BARR software.

DIRECTORY STRUCTURES

The installation programs create these directory structures:


Run Time Environment (RTE)

The run time environment consists of these subdirectories under the directory where the system is installed:

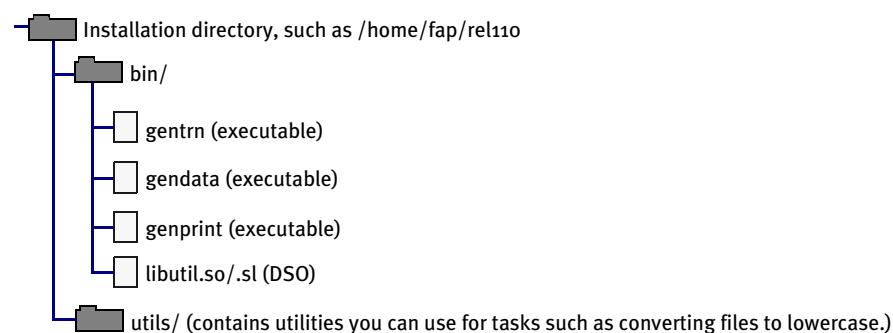


MASTER RESOURCE LIBRARY (MRL)

The MRL installation creates these subdirectories under the directory where the system is installed:

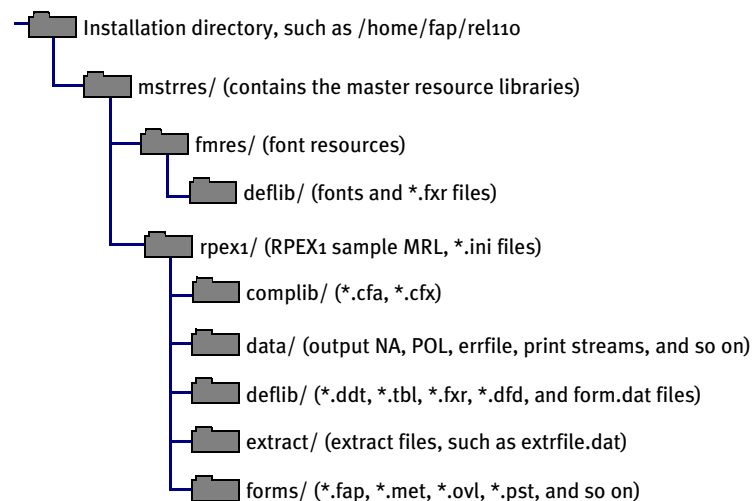

SOFTWARE DEVELOPMENT KIT (SDK)

The SDK installation creates the follow subdirectories under the directory where the system is installed:

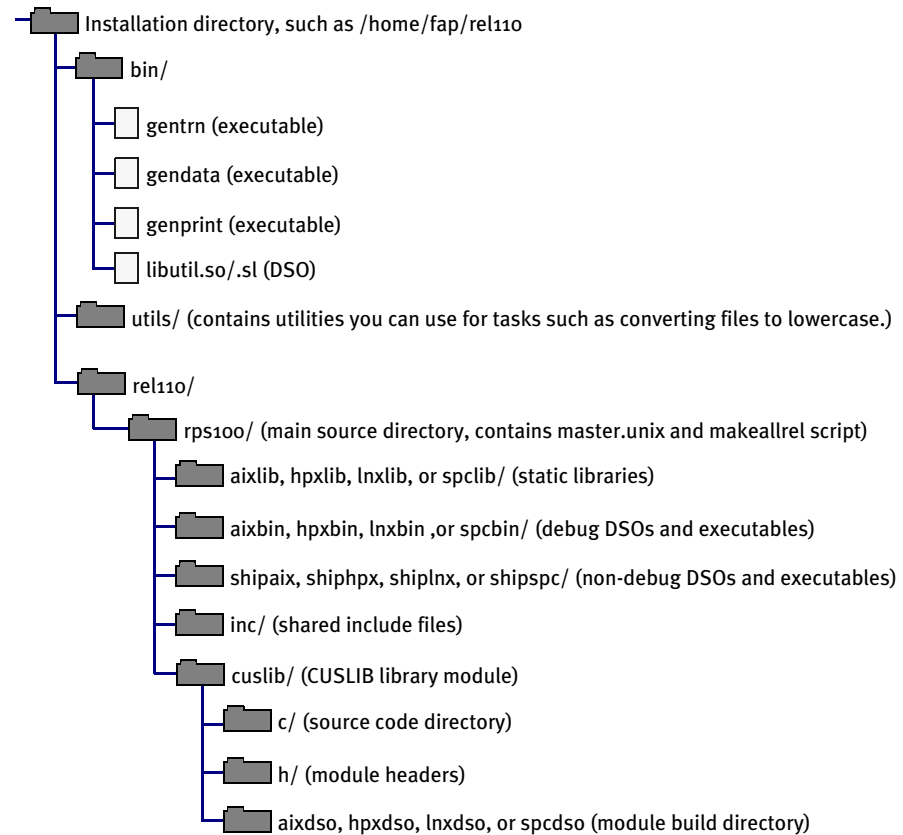

CHAPTER 4

Installing Documaker Server on Windows

This guide provides detailed information on how to install and configure the system in a Windows (Windows 2000, Windows NT, or Windows XP) environment.

You will find information on these topics:

- [Overview on page 96](#)
- [What's on the Installation CD on page 97](#)
- [Installing the System on page 98](#)
- [Checking Your Installation on page 99](#)
- [Using the Documentation on page 102](#)
- [Start-Up Tips on page 103](#)
- [Optimizing Performance on page 104](#)

OVERVIEW

This chapter provides you with steps to install and test the system on your Windows system. This overview discusses the contents of this chapter.

NOTE: See [System Requirements on page 2](#) for information about system requirements.

What's on the Installation CD

The system is available on CD-ROM for Windows systems. This topic describes the contents of the Installation CD you received. For more information, see [What's on the Installation CD on page 97](#).

Installing the System

This topic explains how to install the system. For more information see [Installing the System on page 98](#).

Checking Your Installation

After you install your system, use the sample resources to check your installation. For detailed instructions, see [Checking Your Installation on page 99](#).

Using the Documentation

This topic describes the on-line documentation included on the Installation CD and explains how to use it. For more information, see [Using the Documentation on page 102](#).

Start-Up Tips

This topic provides additional information on using the system in a Windows environment. For more information, see [Start-Up Tips on page 103](#).

Optimizing Performance

Once you have installed and tested your system, you can review this topic to find ways to improve system performance. For more information, see [Optimizing Performance on page 104](#).

WHAT'S ON THE INSTALLATION CD

The Installation set includes a CD-ROMs with installation routines, program files, documentation, and sample MRLs. Depending on your license, the installation routine installs Documaker Server, Docucreate, Documaker Studio, and/or Documaker Workstation depending on your license type.

See [Installing the System on page 98](#) for instructions on how to install the system.

NOTE: Registered users can go to the [DOSS](#) site where you can logon, review current patch reports, and download installation files which you can transfer to your system for installation.

On-line documentation

On CD-1 you will also find directories which contain on-line manuals and other documentation. Use the index.htm file as a guide to the various documents included.

See [Using the Documentation on page 102](#) for information on how to use the documentation.

INSTALLING THE SYSTEM

Follow these steps to install the following on a personal computer running Windows:

- Docucreate
- Documaker Server
- Entry, WIP, and Archive Retrieval systems of Documaker Workstation (optional, depending on your license)
- AGFA, PCL, and PostScript fonts
- AFP fonts
- Xerox fonts

The installation also installs the RPEX1 sample resource library which includes test results and sample data. The RPEX1 resources are designed for the insurance market.

NOTE: Re-installation *does not* overwrite your INI files.

Before You Begin

If you are using Windows NT 4.0, you should log in as *Administrator* and make sure you have full directory access permissions to the c:\windows\profiles\all users folder, as well as to the registry.

Using NTFS drive formats

When using NTFS drive formats, the logon name must be assigned all privileges and permissions to the Windows operating system folder and all sub-folders within, as well as to make changes to the Windows registry.

Setting up libraries

If you install the system into an existing directory, the current library setup is retained. If you install the system into a new directory, you must set up all of your libraries—just as you would for a new customer.

Setting up users

Follow these steps to install the system:

- 1 Insert CD-1 in your CD-ROM drive.
- 2 Open the CD:\install.htm file, which has links to run the installations on the CD.
- 3 Follow the instructions that appear on your screen to install the software. The installation creates folders and icons on your Start\Programs menu.

After you install the system, restart your computer so the various system settings can take affect. If you install the software on a network, you will need to set up icons and a program group for each user. Refer to your operating system's documentation for information on how to do this.

CHECKING YOUR INSTALLATION

The system includes a sample resource library. The RPEX1 resources are designed for the insurance market.

You can check your installation by processing the resources in the sample resource library you received. The sample libraries include an example directory which you can use to test against the results you get when you run the following tests.

NOTE: Carefully follow these steps, otherwise, the results may be unpredictable.

TESTING WITH THE RPEX1 SAMPLE RESOURCES

The system includes several batch files which let you process the RPEX1 sample resources. There is a specific batch file that lets you select Documaker Server modules (GenTrn, GenData, GenPrint, and GenArc) in single- or multi-step mode for each type of printer, such as PCL, PostScript, Xerox Metacode, and AFP.

The batch files execute the Documaker Server modules (GenTrn, GenData, GenPrint, and GenArc) in the appropriate mode for the specified printer type and copies the appropriate INI files and printer overlays into their proper directories (see the [Documaker Server System Reference](#) for more information).

Processing the RPEX1 Sample Resources

To run the system through a processing cycle, follow these steps:

- 1 Go to the \rpex1 directory.
- 2 At the operating system prompt, enter the appropriate command:

To produce output for	For multi-step, enter	For single-step, enter
all printer types	run a m	run a s
AFP printers	run f m	run f s
Xerox Metacode printers	run x m	run x s
PostScript printers	run s m	run s s
PCL printers	run p m	run p s

Printing the RPEX1 Output

To print the output you generated when you ran the system, follow the instructions below which match the type of printer.

NOTE: See the [Documaker Server System Reference](#) for detailed instructions on printing to AFP, Metacode, PCL, or Postscript printers.

For an AFP printer

Copy to the printer all of the files located in the \rpex1\forms\afpovl directory which have an *afp* extension. (Use the PSF librarian to add printer resources to the printer)

After you have added all of the printer resources to the printer, use the *aprint* command to print the AFPBAT1 file, located in the \rpex1\data directory.

For a Metacode printer

Copy all files located in the \rpex1\forms\xerovl which have a *dat* extension to the \spool directory for the printer.

After you have copied these printer resources to the \spool directory, copy the XERBAT1 file, located in the \rpex1\data directory, to the \spool directory for the Xerox printer.

For a PCL printer

Copy the rel103SM.FNT font file located in \mstrres\fmres\deflib directory to the printer along with the PCLBAT1 file, which is located in the \data directory. You can do this by entering the following command from the \rpex1 directory:

```
copy /b ..\fmres\deflib\rel103sm.fnt + DATA\pclbat1 lpt1
```

NOTE: Depending on your printer environment, you may need to substitute \\servername\queue\name for *lpt1* in the command shown above.

For a PostScript printer

Copy the rel103SM.PST font file located in \mstrres\fmres\deflib directory to the printer along with the PSTBAT1 file, which is located in the \data directory. You can do this by entering this command from the \rpex1 directory:

```
copy /b ..\fmres\deflib\rel103sm.pst + DATA\pstbat1 lpt1
```

NOTE: Depending on your printer environment, you may need to substitute \\servername\queue\name for *lpt1* in the command shown above.

Testing WIP with RPEX1

The RPEX1 library is set up to place two transactions into WIP. Follow these steps to perform the test:

NOTE: If you are licensed for WIP the following steps apply. If, however, you *are not* licensed for WIP, do not perform these steps.

- 1 At an operating system prompt, enter this command:
genwpw32
- 2 Start the Entry module by entering:
afemnw32 /mode=wip
- 3 Choose the WIP, WIP List option.
- 4 Select transaction 2234567 and click Ok.

Viewing Archived RPEX1 Forms

Optionally, you can archive the bills previously printed by following these steps:

NOTE: If you are licensed for Archive Retrieval the following steps apply. If, however, you *are not* licensed for Archive Retrieval, do not perform these steps.

- 1 At an operating system prompt, enter this command:
genacw32
- 2 Start the Entry system by entering this command:
afemnw32 /mode=retrieve
- 3 Choose the Retrieve, Formset option to view the archived bills.

USING THE DOCUMENTATION

The \doc directory contains the on-line documentation available for this release. In this directory on the CD, you will find Portable Document Format (PDF) files which you can view or print using the Adobe• Acrobat• Reader• .

In the \doc\dm-rp directory you will find the various manuals, such as:

- Docucreate Supervisor Guide
- Docucreate User Guide
- Documaker Supervisor Guide
- Documaker User Guide
- Documaker Server System Reference
- Docutoolbox Reference
- Rules Reference
- DAL Reference
- product release information
- Documaker Server Installation Guide

For best results, make sure you have the latest version of Acrobat Reader. You can download the free reader at Adobe's web site: www.adobe.com.

NOTE: If you have Acrobat Reader installed on your computer, uninstall the current version before you install an updated version.

You can use the Acrobat Reader to view the documentation on the Installation CD or you can copy the various files onto your hard disk and view them from there.

START-UP TIPS

Here are some additional tips to help you get your system up and running:

Using long file names

In Windows, file names, including the path, can be up to 256 characters long. You should, however, limit the names of resource files, such as FAP and LOG files, to 100 characters or less, excluding the path.

Documaker Server software imposes no limits on the length of the names use for the output files, such as print streams, so you can name those files however you like.

Naming conventions for printers in Windows NT

Windows NT does not use the LPT naming convention, such as LPT1, LPT2, and so on, for printers. Instead, it uses the \\server name\printer convention. If you are using Windows NT, you may need to modify your FAPCOMP.INI file to print correctly. For Documaker, you may need to modify the FSISYS.INI and FSIUSER.INI files. In Windows NT version 4.0, you must log on as the administrator and establish your printer connections to set up the naming conventions for your printers.

Displaying objects in color in Windows

By default, variable fields use the color red. If, when you open a FAP file in Windows, the first variable field appears in red and the other variable fields appear in dark red, you can change the colors using the Windows Control Panel. To change the color settings, select My Computer, Control Panel, and then Display. The Display Properties window appears. Click the Settings tab. In the Color Palette field, choose High Color (16 bit). Then, reboot your system.

OPTIMIZING PERFORMANCE

This topic will help you configure your system for optimum performance. To gather the following recommendations, we first created benchmarks on a test system. Then, by changing different parameters of that system, we measured performance gains or losses. in our benchmark testing. Here are some of the terms we used during this exercise:

CPU TIME. The amount of time that a program, such as GenTrn, GenData, or GenPrint, uses the CPU.

EXCPs. Execute Channel Programs. We have used these counts as basic measurements of I/O activity.

WALL CLOCK TIME. The elapsed time, as measured from the time a program begins to the time that the program ends. This *wall clock time* can vary significantly from one run to another.

BATCH WINDOW. Most installations have specific times of the day or night when large batch processes, like this system, are scheduled to run. The time frame in which these processes run is sometimes referred to as the *batch window*. A batch window is measured in *wall clock time*, such as from 10:00 pm to 5:00 am. Your system installation should run fast enough to complete its processing within the *batch window*.

Most, but not all, of the following recommendations are the result of many tests and subsequent improvements designed for a hypothetical user. The characteristics of Documaker Server implemented for this hypothetical user are as follows:

- Extract file with large record length (approximately 25,000 bytes/record).
- Form sets composed with large number of individual images.
- Large number of different recipients (approximately 300).
- Moderate number of transactions (approximately 4,000)

NOTE: You can find additional information on optimizing performance in the [Documaker Server System Reference](#).

SETTING YOUR FSISYS INI OPTIONS

Caching Options

The following options attempt to minimize the repeated opening and closing of frequently used files by retaining, or caching, file handles and file data. In many cases the defaults are sufficient but for specific cases, where many different images are used, these caching values may be increased to improve performance.

Caching FAP files

In some cases, FAP files (images) are loaded as the GenData program runs. The cache feature keeps frequently used FAP files available for re-use. The CacheFAPFiles option is specified in:

```
< Control >
    CacheFAPFiles = 100
```

The default is 100.

Accept the default value *unless* you are loading FAPs in GenData using FSISYS INI CompileInstream=Yes option and using more than 100 FAP files or logos or both.

DDT files

Data definition table (DDT) files are loaded during as the GenData program runs. The cache feature keeps frequently used DDT file available for re-use. The RuleFilePool option is specified in:

```
< Control >
    RuleFilePool = 100
```

The default is 100.

Accept the default value unless you are using more than 100 DDTs.

Using/Caching Xerox PMET files

MET files contain pre-compiled Xerox Metacode information produced by the FAP2MET utility. The GenPrint program loads MET files as necessary. The cache option keeps frequently used MET files available for re-use. The CacheFiles option is specified in:

```
< PrtType:XER >
    CacheFiles = 100
    CompileInstream = No
```

The default is 100.

Accept the default value *unless* you are using pre-compiled FAP files and more than 100 FAP files or logos or both.

Using AFP Overlays

For best performance, you should run the FAP2OVL utility program, compiling FAPs into AFP overlays. Tell the system to use the overlays by specifying:

```
< PrtType:AFP >
    SendOverlays=Yes
```

Use the PSF librarian to add printer resources to the printer.

LOGGING OPTIONS

LogTransactions option

The GenTrn, GenData, and GenPrint programs optionally place transaction information into a LOG file. In most situations, this information is not needed. The LogTransactions option is specified in:

```
< Control >
LogTransactions = No
```

The default is Yes.

For optimum performance, specify *No*.

LogToConsole option

The GenTrn, GenData, and GenPrint programs optionally store transaction information. In most situations, this information is not needed. The LogToConsole option is specified in:

```
< Control >
LogToConsole = No
```

The default is Yes.

For optimum performance, specify *No*.

DEBUG OPTIONS

If_Rule control group

```
< If_Rule >
Debug_if = No
```

The default is Yes.

For optimum performance, specify *No*.

RUN OPTIONS

RunMode control group

You have these runtime options:

```
< RunMode >
Download FAP = No
LoadCordFAP  = No
CompiledFAP  = Yes
```

The defaults are...

```
DownloadFAP = No
LoadCordFAP = No
CompiledFAP  = No
```

Set the DownloadFAP option to *No*, the LoadCordFAP option to *No*, and the CompileFAP option to *Yes* for the best performance.

You can learn more about these options in the Documaker Server System Reference.

OTHER OPTIONS

MaxRecsPerTransaction option

```
< ExtractFile >  
    MaxRecsPerTransaction  =  nn
```

The default is zero (0) and there is no maximum. Be careful using this option. You might want to use this option if you *know* that each record in the extract file corresponds to a transaction.

AliasPrintBatches option

```
< ExtractFile >  
    AliasPrintBatches  =  Yes
```

The default is No. Use the default.

Index

NUMERICS

3270 emulator program 73

A

access permissions 82

Adobe Acrobat 81

Adobe Acrobat Reader 87, 102

Advanced Function Presentation 19

AFGJOB member 56

AFP

- batch files for RPEX1 99

- configuring 11

- fonts 82

AFP2MVS utility 76

AFPBAT1 file 100

AFPCOPY utility 76

AFPFMDEF utility 76

AFPFMDFX job 19

AGFA

- fonts 82

AIX

- Documaker Server system requirements 6

- Docupresentment requirements 10

- Docupresentment web server requirements 11

- installation 81

- system requirements 2

AliasPrintBatches option 51, 91, 107
Allocating AFP-related Datasets 18
ALLOCDDB2 and COMPDB2 27
ALLOCDDT job 54
ALLOCDT job 56
and host archive 26
ANSI code page 74
APPIDX table 26, 28
aprint command 100
Archival control group 27
ARCHIVE table 26
archived bills
 viewing from RPEX1 86, 101
ArcRet control group 27
ASCII files 72
awk utility 6

B

BARR interface 44
BARR software 92
BARR2MVS utility 76
BARRWRAP utility 76
BARRWRPX utility 44
batch files
 for processing RPEX1 99
Batch window 45, 89, 104
block sizes 47

C

CacheFAPFiles option 89, 105
CacheFiles option 90, 105
caching options
 for DDT files 49, 90, 105
 for FAP files 49
 summary 105
carriage returns 73
CDs
 contents 81

changing
 the FSI SYS.INI file (AFP) 19
 the JCL 20, 29
 the JCL (Metacode) 18
 the Xerox JSL 11
checking
 the JCL 36
 your FSIUSER and FSI SYS settings 33
 your installation 33
code page 1004 74
code page 37 74
colors 103
compile options 46
CompileInstream option 16
compilers
 system requirements 5, 6, 7, 8, 10, 11
COMPLIB 72
configuring
 host archive using DB2 26
 your print environment 11
 your system for AFP printers 18
CPCNV utility 74, 76
CPU time 45, 89, 104
CreateIndex option 28
CreateTable option 28
Creating DB2 Objects 26
Creating NAFILE and POLFILES as VSAM KSDSs 62

D

DAP procedure 18, 20
DAPRUN job 18, 20, 36
Database option 28
DB2
 Command Processor program 41
 database management system 26
 DefaultTag option 28
 table 28
DB2_FileConvert control group 27, 28
DBHANDLER
 DB2 control group 28

- DDT files
 - caching 49, 90, 105
- DDTVSAM DD statement 55
- DDTVSAM option 55
- debug options 51, 91, 106
- DefaultTag option 28
- defining the extract file as a VSAM ESDS 52
- DEFLIB 47
- DEFLIB PDS 54, 56, 60
- DJDEI den entry 12
- DJDEOffset entry 12
- DJDESkip entry 12
- Documaker Server 82
 - requirements 5
- Documanager
 - system requirements 2
- documentation 81, 87
- Docupresentment
 - requirements 9
- DOS command line interface 73
- DownloadFAP option 16, 51, 91, 106
- DownloadFonts option 92
- downloading
 - print streams 92
- downloading resources 72
- DSNHC procedure 27

E

- EBCDIC
 - code page 74
 - uploading files 72

- encrypted passwords 78
- EXCPs 45, 89, 104
- extract files 47

F

- FAP files
 - caching 49
 - caching options 89, 105
 - compiled 72
 - using pre-compiled 50, 90, 105
- FAP2CFA utility 72, 76, 77
- FAP2MET utility 16, 50, 75, 76, 90, 105
- FAP2OVL utility 19, 77
- FAPCOMP.INI file 88, 103
- FAPLIB 48
- FB 47
- FBS 47, 52, 62
- FDT2CFA utility 72, 77
- file names 88
- files
 - transferring 72
 - types and characteristics 47
- FIXOFFS utility 77
- FNT files
 - for logos 17
- fonts
 - AFP 19
 - Metacode 17
- FormDef 19
- fseek 47
- FSISYS
 - changing the JSL for Metacode printers 11
 - checking your settings 33
 - DDTVSAM option 55, 57
 - METVSAM option 59
 - options 89, 105
 - performance options 49
 - VSAMNA option 62
 - VSAMRCPTB option 61

FSIUSER

- archive settings 27
- checking your settings 33

FSIVER utility 77

G

GenArc program 26, 84, 99

- and DSN 41
- defined 77

GenArcX member 29

GenData program 77, 84, 99

GENDATAL job 8

GenDataX job 55, 57

GENERAFF job 20

GENERAFF member 44

GENERXER job 18

GENERXER member 44

GENLOGOS job 17

GenPrint program 77, 84, 99

GENPRTL job 8

GenPrtX job 20

GenTrn program 78, 84, 99

graphics card 17

H

handling international characters 74

hardware requirements 4

HEAP option 46

HP-UX 79, 80, 81, 82, 84

- system requirements 2

I

IBM

- DB2 database management system 26
- Print Services Facility 19

IDCAMS job 62

iDocumaker

- requirements 12

IDS

- Java requirements 11

IEBGENER 44

IF_Rule control group 51, 91, 106

ImageOpt entry 12

IMG files

- graphics cards 17

INI files

- installation 82

INLINE option 46

installation

- programs 81

installing the system 82, 98

international characters 74

iPPS

- requirements 12

J

Java 11

- Docupresentment requirements 11
- and web servers 14

JCLLIB PDS 54, 58, 60
JDEName entry 12
JDLCode entry 12
JDLData entry 13
JDLHost entry 12
JDLName entry 12
JDLROffset entry 13
JDLRPage entry 13
JDLRStack entry 13
JDTVSA DD statement 57
JDTVSA option 57
Job Description Entry 12
JSL

- changing the Xerox 11
- requirements for Metacode 12
- viewing 11

L

libraries 69

- checking your installation 84
- checking your installation with RPEX1 99
- setting up 82

license

- installation 81

line feeds 73Linux

- Documaker Server system requirements 7
- Docupresentment requirements 10
- Docupresentment web server requirements 11
- installation 81
- system requirements 2

LOADDAP job

- listing 63

loading fonts onto a Metacode printer 17LOG2PSEG utility 19, 78logging options 50, 90, 106logos

- loading 17
- making resources available 17

LogToConsole option 50, 90, 106
LogTransactions option 50, 90, 106
long file names 88, 103

M

making printer resources available

- for AFP printers 18
- for Metacode printers 17

maximum logical record length

- MaxExtReclen 52

MaxRecsPerTransaction option 51, 91, 107Metacode

- batch files for RPEX1 99
- configuring 11
- moving PMETs 58

METVSAM option 59modifying the FSISYS.INI file 27moving

- DDT files into a VSAM KSDS 54
- JDT files into a VSAM KSDS 56
- PMET files into a VSAM KSDS 58
- SETRCPTB files to a VSAM KSDS 60

MVS

- programs 72
- utilities 76

N

NAFILE 48, 62
NAPOLVS member 62
networks

- system requirements 3

NEWTRN 48
NFS 82, 85
NOVALIDATEHANDLE option 46

O

ODBC
 DefaultTag option 28
Optimize option 46
optimizing performance 45, 89, 104
OS//390
 system requirements 2
overlays 19
Overview 80

P

page segments 19
passwords 78
PCL
 batch files for RPEX1 99
 fonts 82
PCLBAT1 file 100
PDFKEY utility 78
PDS2VSAM utility 78
PDS2VSDX job 54
PDS2VSJX job 56
PDS2VSPX job 58
performance
 INI options 89, 105
 optimizing 45, 89, 104
permissions 82
PMETLIB PDS 50, 58
POLFILE 48, 62
Port option 16, 20
PostScript
 batch files for RPEX1 99
 fonts 82
pre-compiled Metacode files 49, 58, 75
pre-compiling FAP files
 into Metacode files 16
 into overlays 19
print files 49
print streams
 downloading 92
Printer control group 15, 20
printer naming conventions 88, 103
printer resources 17
Printer1 control group 16, 20
PrinterInk entry 13
printers
 system requirements 5, 6, 8
printing
 IMG files 17
 RPEX1 output 85, 100
 with DAPRUN 44
processing
 RPEX1sample resources 84, 99
PrtType control group
 AFP 19
 XER 11, 15
PSF
 and AFP 19
 librarian 100

PSF/2 92
PSTBAT1 file 100

Q

queue name 100

R

RCP2VSAM utility 48, 78
RCP2VSMX job 60
Receive command 73
recipient batch files 48
record formats 47
REL102SM.FNT font file 100
REL102SM.PST font file 100
Report option 46
resource libraries
 samples 82
RPEX1
 resources 82
 testing with 84, 99
RuleFilePool option 90, 105
run.sh 84, 85
RunMode control group 16, 51, 91, 106
running 27
 DAPRUN 37
 GenArcX 41
 GenTrnX, GenDataX, and GenPrtX 37
 GenTrnX, GenDataX, and GenPrtX separately 36

runtime options 46

S

SaMBa 82, 85
SAMPAPF utility 78
sample resources 82
Send command 73
SEQ2KSDS utility 77
server name 100
SETRCPTB
 member 48, 60
setting
 FSISYS options 49
 FSISYS.INI options 89, 105
setupte.aix 81
setupte.lnx 81
setupte.spa 81
Solaris
 Documaker Server system requirements 7
 Docupresentment requirements 11
 Docupresentment web server requirements 11
 installation 81
 system requirements 2
SQL databases
 DefaultTag option 28
start-up tips 88, 103
SYSPRINT
 DD statement 50
 running GenArcX 41
system
 resources on a PC 72
system requirements 2

T

testing
 with RPEX1 84, 99

text files 72
transferring files 73
TRANSLAT utility 78
Trigger2Archive control group 28
TSO Terminal Monitor Program 41

U

uncompress utility 6
UNIT names 36
UNIX
 system requirements 2
uploading and downloading resources 72
using
 on-line documentation 87, 102
using the dap procedure (or the GenPrtX job) 20
uudecode utility 6

V

variable fields 103
viewing
 archived RPEX1 forms 86, 101

viewing the JSL 11
VSAM datasets 77
VSAMNA option 62
VSAMRCPTB option 61

W

wall clock time 45, 89, 104
Windows
 DocuPresentment system requirements 9
 DocuPresentment web server requirements 11
 system requirements 2

X

XERBAT1 file 100
XERDNLD utility 75, 78
XERLOGOS job 17
Xerox
 batch files for RPEX1 99
 configuring 11
 font names 17
 fonts 82
 image, font, and form files 75
 pre-compiled Metacode files 75

Z

z/OS
 Documaker Server system requirements 5
 system requirements 2