

Sun Ray Connector for Windows OS 2.2
; i jXY`i gi U]c

February 2011

ORACLE®

Sun Ray Connector for Windows OS 2.2 Guía del usuario

Copyright © 2011, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Sun Ray Connector for Windows OS 2.2. Guía del usuario

Sun Ray Connector for Windows OS 2.2. Guía del usuario

Contenido

- Cómo iniciar una sesión de Windows
 - Cómo iniciar una sesión de Windows en Java Desktop System (JDS)
 - Cómo bloquear una sesión de Windows
 - Cómo configurar el acceso a la página de comando `man uttsc`
 - Cómo configurar el acceso a los comandos de SRWC
 - Cómo configurar un acceso directo en el escritorio para iniciar una sesión de Windows
 - Asignación de unidades de almacenamiento locales
 - Troubleshooting Windows Session Connection
 - Problem: Unexpected Time Zone Value
 - Connection Error Messages
-

Uso (todos los temas)

Cómo iniciar una sesión de Windows


Una vez instalado el software Sun Ray Windows Connector, puede iniciar una sesión de Windows en una DTU desde un sistema Windows.

1. Inicie sesión en una DTU.
2. Inicie una sesión de Windows en un sistema Windows.

```
% /opt/SUNWuttsc/bin/uttsc <options> <hostname.domain>
```

Si el sistema Windows está en el mismo dominio que el escritorio de Sun Ray, no es necesario que especifique el nombre del dominio. Sin embargo, si lo prefiere, puede especificar la dirección IP completa en lugar de `<hostname.domain>`.

Al emitir el comando `uttsc` sin opciones, excepto el nombre o la dirección de un sistema Windows, se muestra una sesión de Windows en la DTU de Sun Ray, como se muestra en la siguiente figura.

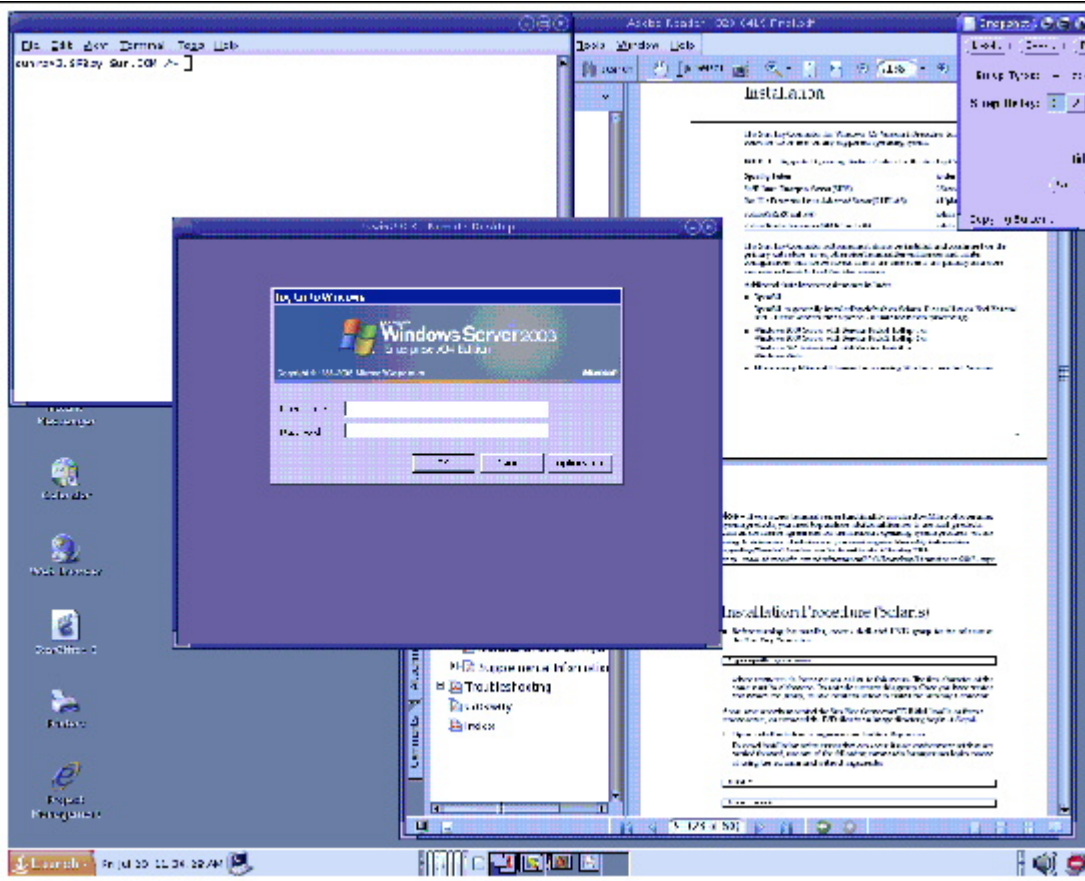

El tamaño predeterminado de la pantalla es de 640 x 480.

Para que se muestre una sesión en modo de pantalla completa o para modificarla de otros modos, consulte la página de comando `man uttsc` (1).

Para mostrar una sesión a través de varios monitores con el comando `uttsc`, debe activar **XINERAMA** en la DTU de Sun Ray.

Cómo iniciar una sesión de Windows en Java Desktop System (JDS)

El paquete de integración de Sun Java Desktop System (JDS) para el sistema operativo Solaris ofrece una interfaz de línea de comandos denominada `uttscwrap`, que mejora la integración de Sun Ray Windows Connector con el escritorio JDS en Solaris 10. El paquete de integración JDS se incluye en la carpeta `Supplemental` de la imagen del software de Sun Ray Windows Connector.

Utilice `uttscwrap` cuando se hayan definido iniciadores de escritorio o de menú para abrir las sesiones o las aplicaciones de Windows en varios sistemas Windows.

`uttscwrap` proporciona un cuadro de diálogo de inicio de sesión que posibilita la entrada de credenciales para la autenticación basada en contraseña (`username/domain/password`). Estas credenciales se pueden almacenar en los cuadros de diálogo para utilizarlas otras veces. En el siguiente inicio de sesión, el cuadro de diálogo muestra las credenciales.



Nota

`uttscwrap` está diseñado para utilizar la caché de credenciales sólo para la autenticación basada en contraseñas. No se puede utilizar con la autenticación mediante tarjetas inteligentes. Para la autenticación con tarjetas inteligentes, utilice directamente Sun Ray Windows Connector (`/opt/SUNWuttsc/bin/uttsc`).

Las credenciales se guardan por separado para cada combinación de servidor y aplicación de Windows. Esta convención permite guardar diferentes credenciales de los siguientes modos:

- Para aplicaciones distintas del mismo servidor
- Para aplicaciones distintas de servidores diferentes
- Para sesiones de servidor distintas sin aplicaciones iniciadas

Las credenciales almacenadas para un servidor o una aplicación reemplazarán los datos guardados previamente.

Pasos

Para iniciar Sun Ray Windows Connector mediante `uttscwrap`, especifique los mismos parámetros en la línea del comando `uttscwrap` que en la del comando `uttsc`.

1. Inicie sesión en una DTU.
2. Inicie una sesión de Windows en un sistema Windows.

```
% /opt/SUNWuttscwrap/bin/uttscwrap <options> <hostname.domain>
```

Si el sistema Windows está en el mismo dominio que el escritorio de Sun Ray, no es necesario especificar el nombre del dominio. Sin embargo, si lo prefiere, puede especificar la dirección IP completa en lugar de `<hostname.domain>`.

Cómo bloquear una sesión de Windows

Este procedimiento describe cómo bloquear una sesión de Windows cuando la sesión del usuario se traslada de una DTU específica de Sun Ray.



Nota

La implementación de esta función se basa en tecnología que no está disponible de forma predeterminada, en interfaces no públicas de Sun Ray y en el uso de determinadas interfaces públicas de Sun Ray con fines distintos a los previstos. Por estos motivos, esta función no se proporciona como una función admitida.

Un método habitual de bloquear una sesión es enviar las pulsaciones de bloqueo de pantalla a la sesión de Windows mediante `xvkbd`, que se invoca con `utaction`.

Puede llamar a `utaction` desde una secuencia `xsession.d` o `xinitrc.d`, como se indica a continuación:

```
#!/bin/sh
XVKBD=/usr/openwin/bin/xvkbd
/opt/SUNWut/bin/utaction -d "$XVKBD -text '\M1'" &
```

Dado que `xvkbd` no está disponible de forma predeterminada, debe modificar el parámetro `XVKBD` del ejemplo para que identifique correctamente la ubicación de la instalación de `xvkbd`.



Nota

La secuencia de pulsaciones `\M1` activa el bloqueo de Windows para las sesiones de Windows 2003/XP. Es posible que necesite sustituir una secuencia de pulsaciones diferente para otras versiones de Windows.

Cómo configurar el acceso a la página de comando man `uttsc`

Para permitir que los usuarios accedan directamente al comando `man`, agregue la siguiente entrada a su variable `MANPATH`:

```
/opt/SUNWuttsc/man
```

Si ha instalado el paquete de integración de Java Desktop System (JDS) (sólo Solaris), también debe agregar la siguiente entrada:

```
/opt/SUNWuttscwrap/man
```

Los usuarios podrán visualizar una página de comando `man` escribiendo el comando siguiente:

```
% man uttsc
```

Cómo configurar el acceso a los comandos de SRWC

Para que los usuarios puedan acceder directamente a los comandos de SRWC, agregue la siguiente entrada a su variable PATH:

```
/opt/SUNWuttsc/bin, /opt/SUNWuttsc/sbin, /opt/SUNWuttscwrap/bin
```

La ruta `/opt/SUNWuttscrap/bin` sólo se necesita si los usuarios utilizan el paquete de integración de JDS.

Cómo configurar un acceso directo en el escritorio para iniciar una sesión de Windows

En la actualidad no hay ninguna interfaz gráfica de usuario disponible para Sun Ray Windows Connector. Sin embargo, los lanzadores se pueden configurar para proporcionar a los usuarios los iconos del escritorio o elementos de menú para conectarse a la sesión de Windows.

Si desea obtener información sobre cómo configurar los lanzadores, consulte la documentación del escritorio para su sistema operativo.

Asignación de unidades de almacenamiento locales

Cualquier archivo puede montarse y asignarse desde el entorno Sun Ray en el entorno Windows. Los sistemas de archivo pertenecientes a los dispositivos de almacenamiento extraíbles, por ejemplo unidades Flash, que estén conectados a los puertos USB de Sun Ray Server, pueden asignarse al entorno de Windows con el comando `utstorageed`, donde aparecen como unidades montadas localmente.



Nota

Los nombres de archivo de Windows no pueden contener los siguientes caracteres: `: * ? " < > |`. Asegúrese de que las carpetas UNIX redirigidas no contengan ningún nombre de archivo con estos caracteres.

Para que los usuarios puedan acceder a los dispositivos USB conectados a una DTU de Sun Ray desde sus sesiones de Windows, consulte [About USB Device Redirection](#).

Troubleshooting Windows Session Connection

Problem: Unexpected Time Zone Value

`uttsc` only considers time zones listed in `/usr/share/lib/zoneinfo/tab/zone_sun.tab` (for Solaris) and `/usr/share/zoneinfo/zone.tab` (for Linux), as valid zones that can be converted into the equivalent time zones in the Windows session. If the time zone is set to a value other than those defined in these files, then the time zone value in the Windows session can be unexpected.

Connection Error Messages

Message	Comments
Error(%d): Unable to establish data store connection.	The Sun Ray Windows Connector was unable to open a connection to the Sun Ray data store. Ensure that the SRDS has been configured for Sun Ray software and is reachable. Also, ensure that the Sun Ray Windows Connector has been successfully configured before launching it.
Error(%d): Unable to determine SRSS version.	SRWC could not determine SRSS version information. Ensure that SRSS 4.2 or above is installed and configured successfully.
Error(%d): Unable to launch Sun Ray Connector. Only SRSS 4.2 and above are supported.	SRWC 2.2 is supported only on SRSS 4.2 and above. Ensure that the correct version of SRSS is installed.

Sun Ray session is not connected, please try again.	Ensure that SRWC is being launched from a valid connected Sun Ray session.
Cannot obtain DTU MAC address.	SRWC was unable to contact the Sun Ray Authentication Manager to retrieve the DTUs MAC address. Ensure that this daemon is reachable.
Error: Sun Ray Token ID cannot be determined. Sun Ray Connector can only be launched from a Sun Ray session.	SRWC was launched from a non-Sun Ray session (for example, telnet or console). It can only be launched from a connected DTU session.
Unable to create new audio device. Using default audio device.	<code>utaudio</code> failed to create a new audio device. Check the messages logged by <code>utaudio</code> for more information. SRWC will try to use the default audio device for the session.
Device <device_name> is not allocated. Audio will not work in this session. Continuing..	On Solaris Trusted Extensions platforms, if the default audio device is not allocated, then SRWC will not be able to use any new audio device or the default audio device. In this case, the SRWC session will proceed but without audio support.
Warning. Printer preferences will not be stored. Please run <code>uttscadm</code> to complete configuration before launching Sun Ray Connector.	If <code>uttscadm</code> has not been run before the Sun Ray Windows Connector is launched, the printer preferences as sent by the Windows system will not be stored and hence cannot later be reused. This error is not fatal. The session will continue to be launched.
Unable to connect to Sun Ray Connector Proxy. Please ensure <code>uttscadm</code> has been run before launching the Sun Ray Connector.	Make sure the proxy daemon (<code>uttscpd</code>) is up and running. If the Sun Ray Windows Connector is launched before <code>uttscadm</code> has been run to configure it, then the Sun Ray Windows Connector Proxy is not reachable. This message occurs only on Solaris systems.
Unable to launch Sun Ray Connector. Please ensure <code>utconfig</code> has been run before launching the Sun Ray Connector.	If Sun Ray Windows Connector is launched without having configured Sun Ray data store using <code>utconfig</code> (from Sun Ray Server Software), then the connector cannot be used.

Glossary

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------

If you would like to add a term to the list, use the Add Comment link at the bottom of the page.

A

Term	Description
AAC	Advanced Audio Coding, a "lossy" compression format capable of delivering relatively high quality at relatively low bit rates.
alias token	An alias token that enables a card owner to access the same Sun Ray session with more than one physical token. This token can be useful when a user needs a duplicate smart card.
ALP	The Sun Appliance Link Protocol, a suite of network protocols that enable communication between Sun Ray servers and DTUs.
AMGH	Automatic Multigroup Hotdesking. See regional hotdesking.
AH	Authentication headers used as part of an IPSec implementation.
authentication policy	The Authentication Manager uses the selected authentication module to determine what tokens are valid and which users, as token owners, have access to the system and sessions.
authentication token	Although all tokens are used by the Authentication Manager to grant or deny access to Sun Ray sessions, this term usually refers to a user's smart card token. See token.

B

Term	Description
backplane bandwidth	Sometimes also referred to as "switch fabric." A switch's backplane is the pipe through which data flows from an input port to an output port. Backplane bandwidth usually refers to the aggregate bandwidth available among all ports within a switch.
barrier mechanism	To prevent clients from downloading firmware that is older than the firmware that is already installed, the administrator can set a barrier mechanism. The barrier mechanism symbol BarrierLevel is defined by default in the DHCP table of Sun Ray servers running version 2.0 or later of Sun Ray Server Software.
bpp	Bits per pixel.

C

Term	Description
CABAC	Context-adaptive binary arithmetic coding, a "lossless" entropy coding technique used in H.264/MPEG-4 AVC video encoding.
CAM	Controlled Access Mode, also known as kiosk mode. As of SRSS 4.0, the CAM module was replaced by a rewritten Kiosk module.
card reader	See token reader.
category 5	The most common type of wiring used in LANs. It is approved for both voice and data at up to 100 Mhz. Also called "cat 5."
client-server	A common way to describe network services and the user processes (programs) of those services.
codec	A device or program capable of encoding or decoding a digital data stream or signal.
cold restart	Pressing the Cold Restart button terminates all sessions on a given server before restarting Sun Ray services. See restart.
cut-through switch	The switch begins forwarding the incoming frame onto the outbound port as soon as it reads the MAC address while continuing to receive the remainder of the frame.

D

Term	Description
DHCP	Dynamic Host Configuration Protocol, a means of distributing IP addresses and initial parameters to the DTUs.
domain	A set of one or more system boards that acts as a separate system capable of booting the OS and running independently of any other board.
DTU	Desktop Terminal Units, the original name of Sun Ray desktop units. These units are also referred to as Sun Ray thin clients, Sun Ray ultra-thin clients, and Sun Ray virtual display terminals.

E

Term	Description
ESP	Encapsulating Security Payloads, used as part of IPsec.
Ethernet	Physical and link-level communications mechanism defined by the IEEE 802.3 family of standards.
Ethernet address	The unique hardware address assigned to a computer system or interface board when it is manufactured. See MAC address.
Ethernet switch	A unit that redirects packets from input ports to output ports. It can be a component of the Sun Ray interconnect fabric.

F

Term	Description
------	-------------

failover	The process of transferring processes from a failed server to a functional server.
failover group	Two or more Sun Ray servers configured to provide continuity of service in the event of a network or system failure. Sometimes abbreviated as FOG or HA (for high availability). The term high availability refers to the benefit of this type of configuration; the term failover group refers to the functionality.
filling station	Any private network configured for Sun Ray services or any shared network in which the Sun Ray DHCP server is the only DHCP server. When a DTU's firmware is downgraded to an earlier version because it connects to a server running the earlier version, it needs to be connected to a filling station so that it can download newer firmware.
firmware barrier	See barrier mechanism.
FOG	See failover group.
fps	Frames per second.
frame buffer	Video output device that drives the video display. See virtual frame buffer.

G

Term	Description
GEM	Gigabit Ethernet.
group-wide	Across a failover group.

H

Term	Description
H.264	A standard for video compression developed by MPEG and VCEG for a wide range of bit rates and resolutions. Also known as MPEG-4 AVC (Advanced Video Coding) and MPEG-4 Part 10.
HA	High availability. Sun Ray HA groups have traditionally been called failover groups.
head	Colloquial term for a screen, or display, or monitor, especially in a context where more than one is used in conjunction with the same keyboard and mouse, as in "multihead" feature.
high availability	See failover. The term high availability refers to a benefit of this type of configuration. The term failover group refers to the functionality.
hotdesking	The ability for a user to remove a smart card, insert it into any other DTU within a server group, and have the user's session available for instantaneous access to the user's windowing environment and current applications from multiple DTUs.
hot key	A predefined keyboard shortcut used to trigger certain activities either on the DTU or within the Sun Ray session running on the Sun Ray server. A hot key is used to bring up the Settings screen on the Sun Ray DTU.
hot-pluggable	A property of a hardware component that can be inserted into or removed from a system that is powered on. USB devices connected to Sun Ray DTUs are hot-pluggable.

I

Term	Description
idle session	A session that is running on a Sun Ray server but to which no user (identified by a smart card token or a pseudo-token) is logged in.
IKE	Internet Key Exchange, a component of IPSec.
interconnect fabric	All the cabling and switches that connect a Sun Ray server's network interface cards to the Sun Ray DTUs.

intranet	A private network that uses internet protocols and is confined to an organization.
IP address	A unique number that identifies each host or other hardware system on a network. An IP address is composed of four integers separated by periods. Each decimal integer must be in the range 0-255 (for example, 129.144.0.0).
IP address lease	The assignment of an IP address to a computer system for a specified length of time, rather than permanently. IP address leasing is managed by the Dynamic Host Configuration Protocol (DHCP). The IP addresses of Sun Ray DTUs are leased.
IPSec	The Internet Protocol (Security) set of protocols seeks to secure IP communications by encoding data packets through authentication headers (AH) and encapsulating security payloads (ESP) and by providing a key exchange mechanism (IKE).

K

Term	Description
kiosk mode	A facility to run sessions under an anonymous user account without a UNIX login. Kiosk sessions provide a preconfigured, usually restricted, software environment. The term kiosk mode was used interchangeably with CAM in earlier versions of SRSS. As of SRSS 4.0, this module was completely rewritten and is now officially called kiosk mode.

L

Term	Description
LAN	Local Area Network. A group of computer systems in close proximity that can communicate with one another through connecting hardware and software.
layer 2	The data link layer. The OSI (Open Standards Interconnection) model contains seven layers. Layer 2 is concerned with procedures and protocols for operating the communication lines between networks as well as clients and servers. Layer 2 also has the ability to detect and correct message errors.
local host	The CPU or computer on which a software application is running.
local server	From the DTU's perspective, the most immediate server in the LAN.

M

Term	Description
MAC address	Media Access Control. A MAC address is a 48-bit number programmed into each local area network interface card (NIC) at the time of manufacture. LAN packets contain destination and source MAC names and can be used by bridges to filter, process, and forward packets. 8:0:20:9e:51:cf is an example of a MAC address. See also Ethernet address
managed object	An object monitored by the Sun Management Center software.
mobile token	If mobile sessions are enabled, this pseudo-token enables a user to log in to an existing session from different locations without a smart card, in which case the user name is associated with the session. This type of pseudo-token is called a mobile token.
mobility	For the purposes of the Sun Ray Server Software, the property of a session that enables it to follow a user from one DTU to another within a server group. On the Sun Ray system, mobility requires the use of a smart card or other identifying mechanism.
modules	Authentication modules are used to implement various site-selectable authentication policies.
MPPC	Microsoft Point-to-Point Compression protocol.
MTU	Maximum Transmission Unit, used to specify the number of bytes in the largest packet a network can transmit.
multicasting	The process of enabling communication between Sun Ray servers over their Sun Ray network interfaces in a failover environment.

multihead	See head.
multiplexing	The process of transmitting multiple channels across one communications circuit.

N

Term	Description
NAT	See network address translation.
namespace	A set of names in which a specified ID must be unique.
network address	The IP address used to specify a network.
network address translation	Network address translation (NAT) typically involves the mapping of port numbers to allow multiple machines (Sun Ray DTUs, but not Sun Ray servers) to share a single IP address.
network interface	An access point to a computer system on a network. Each interface is associated with a physical device. However, a physical device can have multiple network interfaces.
network interface card	Abbreviated as NIC. The hardware that links a workstation or server to a network device.
network latency	The time delay associated with moving information through a network. Interactive applications such as voice, video displays, and multimedia applications are sensitive to these delays.
network mask	A number used by software to separate the local subnet address from the rest of a given Internet protocol address. An example of a network mask for a class C network is 255 . 255 . 255 . 0.
network protocol stack	A network suite of protocols, organized in a hierarchy of layers called a stack. TCP/IP is an example of a Sun Ray protocol stack.
NIC	Network interface card.
non-smart card mobility	A mobile session on a Sun Ray DTU that does not rely on a smart card. NSCM requires a policy that allows pseudo-tokens.
NSCM	See non-smart card mobility.

O

Term	Description
OSD	On-screen display. The Sun Ray DTU uses OSD icons to alert the user of potential start-up or connectivity problems.

P

Term	Description
PAM	Pluggable Authentication Module. A set of dynamically loadable objects that gives system administrators the flexibility of choosing among available user authentication services.
PAM session	A single PAM handle and runtime state associated with all PAM items, data, and the like.
patch	A collection of files and directories that replace or update existing files and directories that prevent proper execution of the software on a computer system. The patch software is derived from a specified package format and can be installed only if the package it fixes is already present.
PCM	Pulse Code Modulation.
policy	See authentication policy.
Pop-up GUI	A mechanism that enables configuration parameters for a Sun Ray DTU to be entered from the attached keyboard.

port	(1) A location for passing data in and out of a computer system. (2) The abstraction used by Internet transport protocols to distinguish among multiple simultaneous connections to a single destination host.
POST	Power-on self test.
power cycling	Using the power cord to restart a DTU.
pseudo-session	A Sun Ray session associated with a pseudo-token rather than a smart card token.
pseudo-token	A user accessing a Sun Ray session without a smart card is identified by the DTU's built-in type and MAC address, known as a pseudo-token. See token.

R

Term	Description
RDP	Microsoft Remote Desktop Protocol.
regional hotdesking	Originally known as Automatic Multigroup Hotdesking (AMGH), this SRSS feature enables users to access their sessions across wider domains and greater physical distances than was possible in earlier versions of SRSS. Administrators enable this feature by defining how user sessions are mapped to an expanded list of servers in multiple failover groups.
RDS	Remote Desktop Services. Formally known as Terminal Services. See Windows Terminal Services.
RHA	Remote Hotdesk Authentication, a security enhancement that requires SRSS authentication before users can reconnect to an existing session. RHA does not apply to Kiosk sessions, which are designed for anonymous access without authentication. RHA policy can be administered either through a GUI option or with the <code>utpolicy</code> command.
restart	Sun Ray services can be restarted either from the <code>utrestart</code> command or with the Warm Restart or Cold Restart options through the GUI. A cold restart terminates all Sun Ray sessions; a warm restart does not.

S

screen flipping	The ability on a Sun Ray DTU with a single head to pan to individual screens that were originally created by a multihead group.
server	A computer system that supplies computing services or resources to one or more clients.
service	For the purposes of the Sun Ray Server Software, any application that can directly connect to the Sun Ray DTU. It can include audio, video, Xservers, access to other machines, and device control of the DTU.
session	A group of services associated with an authentication token. A session may be associated with a token embedded on a smart card. See token.
session mobility	The ability for a session to "follow" a user's login ID or a token embedded on a smart card.
smart card	Generically, a plastic card containing a microprocessor capable of making calculations. Smart cards that can be used to initiate or connect to Sun Ray sessions contain identifiers such as the card type and ID. Smart card tokens may also be registered in the Sun Ray Data Store, either by the Sun Ray administrator or, if the administrator chooses, by the user.
smart card token	An authentication token contained on a smart card. See token.
SNMP	Simple Network Management Protocol
spanning tree	An intelligent algorithm that enables bridges to map a redundant topology and eliminates packet looping in Local Area Networks (LANs).
store-and-forward switches	The switch reads and stores the entire incoming frame in a buffer, checks it for errors, reads and looks up the MAC addresses, and then forwards the complete good frame out onto the outbound port.
subnet	A working scheme that divides a single logical network into smaller physical networks to simplify routing.
system	The Sun Ray system consists of Sun Ray DTUs, servers, server software and the physical networks that connect them.

T

TCP/IP	Transmission Control Protocol/Internet Protocol (TCP/IP) is a networking protocol that provides communication across interconnected networks between computers with diverse hardware architectures and operating systems.
thin client	Thin clients remotely access some resources of a computer server, such as compute power and large memory capacity. The Sun Ray DTUs rely on the server for all computing power and storage.
tick	The time interval since a specific network event. It is defined as 1/100th of a second, which is the usual SNMP convention.
timeout value	The maximum allowed time interval between communications from a DTU to the Authentication Manager.
token	The Sun Ray system requires each user to present a token, which the Authentication Manager uses to allow or deny access to the system and to sessions. A token consists of a type and an ID. If the user uses a smart card, the smart card's type and ID are used as the token. If the user is not using a smart card, the DTU's built-in type and ID (the unit's Ethernet, or MAC, address) are used instead as a pseudo-token. If mobile sessions are enabled, a user can log in to an existing session from different locations without a smart card, in which case the user name is associated with the session. A pseudo-token used for mobile sessions is called a mobile token. Alias tokens can also be created to enable users to access the same session with more than one physical token.
token reader	A Sun Ray DTU that is dedicated to reading smart cards and returning their identifiers, which can be associate with card owners (users).
trusted server	Servers in the same failover group that "trust" one another.

U

URI	Uniform Resource Identifier, the generic term for all types of names and addresses that refer to objects on the World Wide Web.
user session	A session that is running on a Sun Ray server and to which a user (identified by a smart card token or a pseudotoken) is logged in.

V

VC-1	Informal name of the SMPTE 421M video codec standard, now a supported standard for Blu-ray Discs and Windows Media Video 9.
virtual desktop	A virtual machine containing a desktop instance that is executed and managed within the virtual desktop infrastructure, usually a Windows XP or Vista desktop accessed through RDP.
virtual frame buffer	A region of memory on the Sun Ray server that contains the current state of a user's display.

W

Term	Description
warm restart	See restart.
WMA	Windows Media Audio data compression file format and codec developed by Microsoft.
work group	A collection of associated users who exist in near proximity to one another. A set of Sun Ray DTUs that are connected to a Sun Ray server provides computing services to a work group.
Windows system	Throughout the SRWC documentation, "Windows system" indicates a Windows OS that can be accessed from a Sun Ray DTU using SRWC. A Windows Terminal Server is one example of a Windows system.
Windows Terminal Server	A server running Windows Server software with Windows Terminal Services enabled.

Windows Terminal Service	A Microsoft Windows component that makes Windows applications and desktops accessible to remote users and clients. Depending on the Windows release, this feature may be called Terminal Services, Remote Desktop Services, or Remote Desktop Connection.
--------------------------	---

X

Term	Description
Xnewt	The new default Xserver for Sun Ray Server Software 4.1 and later on Solaris.
Xserver	A process which controls a bitmap display device in an X window system. It performs operations on request from client applications. Sun Ray Server Software contains two Xservers: Xsun, which was the default Xserver in previous versions of SRSS, and Xnewt, which is the default Xserver for SRSS 4.1 and later. Xnewt enables the latest multimedia capabilities.

Y

Term	Description
YUV	Simple, lossless mechanism to store images or a sequence of images.